





Test Report issued under the responsibility of:

|   |  |   |
|---|--|---|
| <b>LVD TEST REPORT</b><br><b>EN 62368-1</b><br><b>Audio/video, information and communication technology equipment</b><br><b>Part 1: Safety requirements</b> |  |   |
| <b>Report Number</b> ..... : WL19J0203-L0   |  |   |
| <b>Project Number</b> ..... : WL19J0203   |  |   |
| <b>Date of issue</b> ..... : 2019-11-08   |  |   |
| <b>Total number of pages</b> ..... : 70   |  |   |
| <b>Applicant's name</b> ..... : Elite Screens Visual & Sound Co., Ltd.  |  |   |
| <b>Address</b> ..... : 3F., No. 88, Wugong Rd., Xinzhuang Dist., New Taipei City 242, Taiwan (R.O.C.)   |  |   |
| <b>Test specification:</b>  |  |   |
| <b>Standard</b> ..... : EN 62368-1:2014<br>EN 62368-1:2014/AC:2015  |  |   |
| <b>Test procedure</b> ..... : CE Marking for LVD  |  |   |
| <b>Non-standard test method</b> ..... : N/A   |  |   |
|   |  |   |
| <b>Test Item description</b> .....  | Ultra Short Throw Outdoor Portable LED Projector   |   |
| <b>Trade Mark</b> .....   | MosaicGO™  |   |
| <b>Manufacturer</b> .....   | Elite Screens Visual & Sound Co., Ltd.<br>3F., No. 88, Wugong Rd., Xinzhuang Dist., New Taipei City 242, Taiwan (R.O.C.) |   |
| <b>Model/Type reference</b> .....   | MGFU   |   |
| <b>Ratings</b> .....  | 19Vdc, 6.3A  |   |
|   |  |   |
| <b>Testing procedure and testing location:</b>  |  |   |
| <input checked="" type="checkbox"/>   | <b>Testing Laboratory:</b>   | Wendell Electrical Testing Lab.   |
| <b>Testing location/ address</b> .....  |  | 5F., No.4, Ln. 7, Baogao Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)     |
| <b>Tested by (name + signature)</b> .....   | Ken Wu   |  |
| <b>Approved by (name + signature)</b> .....   | Albert Wang  |  |
|   |  |   |



## Report release record


| Report No.   | Description | Issue date |
|--------------|-------------|------------|
| WL19J0203-L0 | Original    | 2019-11-08 |




|   |   |
|---|---|
| <b>Summary of testing:</b>  |   |
| <b>Tests performed (name of test and test clause):</b><br>The sample(s) tested complies with the requirements of EN 62368-1:2014 and EN 62368-1:2014/AC:2015.   | <b>Testing location:</b><br>Wendell Industrial Co., Ltd.<br>5F., No.4, Ln. 7, Baogao Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.) |
| <b>Summary of compliance with National Differences:</b><br><b>List of countries addressed</b><br>Note: This TRF includes EN Group Differences together with National Differences and Special National Conditions, if any. All Differences are located in the Appendix to the main body of this TRF.<br><input checked="" type="checkbox"/> The product fulfils the requirements of EN 62368-1:2014 and EN 62368-1:2014/AC:2015. |   |

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

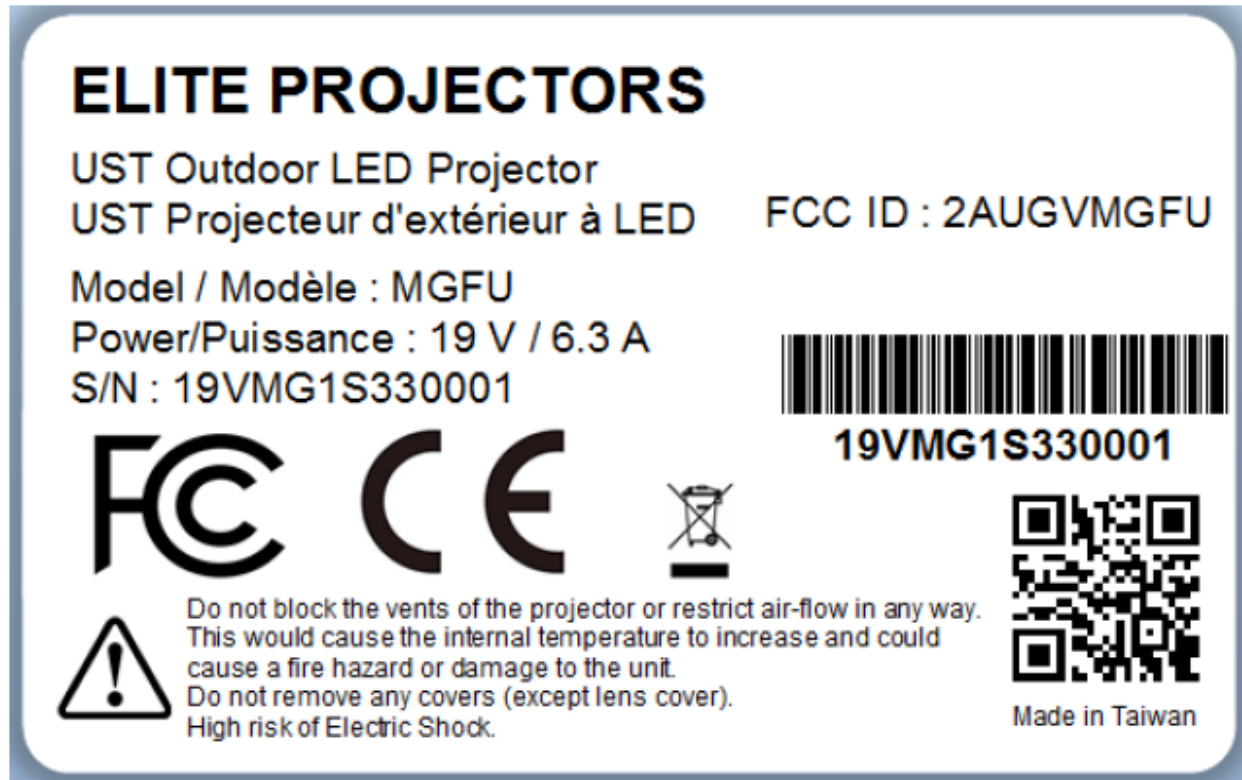

Trademark on enclosure

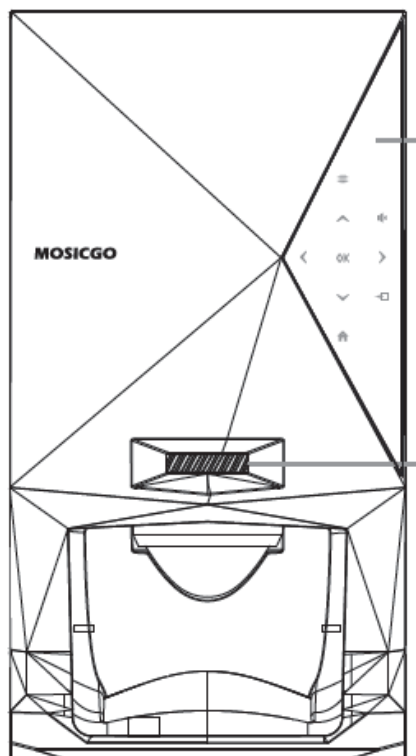

Note:



When the equipment is vended to EUROPE, manufacturers and importers shall indicate on the electrical equipment their name, registered trade name or registered trade mark and the postal address at which they can be contacted or, where that is not possible, on its packaging or in a document accompanying the electrical equipment.



| TEST ITEM PARTICULARS:   |  |
|--|--|
| Classification of use by .....   | <input checked="" type="checkbox"/> Ordinary person<br><input type="checkbox"/> Instructed person<br><input type="checkbox"/> Skilled person<br><input checked="" type="checkbox"/> Children likely to be present  |
| Supply Connection.....   | <input type="checkbox"/> AC Mains <input type="checkbox"/> DC Mains<br><input checked="" type="checkbox"/> External Circuit - not Mains connected<br>- <input checked="" type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3   |
| Supply % Tolerance .....   | <input type="checkbox"/> +10%/-10%<br><input type="checkbox"/> +20%/-15%<br><input type="checkbox"/> +____%/ -____%<br><input type="checkbox"/> None   |
| Supply Connection – Type .....   | <input type="checkbox"/> pluggable equipment type A -<br><input type="checkbox"/> non-detachable supply cord<br><input type="checkbox"/> appliance coupler<br><input type="checkbox"/> direct plug-in<br><input type="checkbox"/> mating connector<br><input type="checkbox"/> pluggable equipment type B -<br><input type="checkbox"/> non-detachable supply cord<br><input type="checkbox"/> appliance coupler<br><input type="checkbox"/> permanent connection<br><input type="checkbox"/> mating connector <input checked="" type="checkbox"/> other: <u>not directly connect to the mains</u> |
| Considered current rating of protective device as part of building or equipment installation ..... | N/A A;<br>Installation location: <input type="checkbox"/> building; <input type="checkbox"/> equipment   |
| Equipment mobility .....   | <input checked="" type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable<br><input type="checkbox"/> stationary <input type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in<br><input type="checkbox"/> rack-mounting <input type="checkbox"/> wall-mounted  |
| Over voltage category (OVC) .....  | <input type="checkbox"/> OVC I <input type="checkbox"/> OVC II <input type="checkbox"/> OVC III<br><input type="checkbox"/> OVC IV <input checked="" type="checkbox"/> other: Not directly connected to the mains  |
| Class of equipment .....   | <input type="checkbox"/> Class I <input type="checkbox"/> Class II <input checked="" type="checkbox"/> Class III   |
| Access location .....  | <input type="checkbox"/> restricted access location <input checked="" type="checkbox"/> N/A  |
| Pollution degree (PD) .....  | <input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3   |
| Manufacturer's specified maxium operating ambient:   | __40__ °C  |
| IP protection class .....  | <input checked="" type="checkbox"/> IPX0 <input type="checkbox"/> IP____   |
| Power Systems .....  | <input checked="" type="checkbox"/> TN <input type="checkbox"/> TT <input type="checkbox"/> IT - ____ V <sub>L-L</sub>   |
| Altitude during operation (m) .....  | <input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> ____ m   |
| Altitude of test laboratory (m) .....  | <input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> ____ m   |
| Mass of equipment (kg) .....   | <input checked="" type="checkbox"/> 2.81kg   |
|  |  |
| <b>POSSIBLE TEST CASE VERDICTS:</b>  |  |
| - test case does not apply to the test object.....   | N/A  |



|  |                          |
|--|--------------------------|
| - test object does meet the requirement .....  | P (Pass)                 |
| - test object does not meet the requirement .....  | F (Fail)                 |
| <b>TESTING:</b>  |                          |
| Date of receipt of test item .....   | 2019-10-02               |
| Date (s) of performance of tests .....   | 2019-10-02 to 2019-10-25 |
|  |                          |
| <b>GENERAL REMARKS:</b>  |                          |
| <p><b>"(See Enclosure #)" refers to additional information appended to the report.</b><br/><b>"(See appended table)" refers to a table appended to the report.</b><br/>The test results presented in this report relate only to the object tested.<br/>This report shall not be reproduced except in full without the written approval of the testing laboratory.<br/>The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with OD-5014 recommendations, and is traceable to recognized national standards. Therefore, the measurement uncertainty is not used in determining the Pass/Fail results at this report.</p> <p>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p>  |                          |
| <b>GENERAL PRODUCT INFORMATION:</b>  |                          |
| <b>Product Description –</b> <ul style="list-style-type: none"><li>• The equipment under test (EUT), model shown as cover page is Ultra Short Throw Outdoor Portable LED Projector for use with audio/video, information and communication technology equipment.</li><li>• Load conditions:<br/>Operation at all ports with highest speed data transmission operated continuously and USB type A port load to 0.5A, USB type C port load to 0.5A and Speaker volume maximum.</li><li>• The equipment is incorporated with following critical parts:<ol style="list-style-type: none"><li>1) Plastic enclosure and fixed by screws.</li><li>2) Main board.</li><li>3) DC fan provided</li><li>4) LEDs for indicator function.</li><li>5) Approved battery pack.</li><li>6) Speaker</li><li>7) LED chip for projector</li><li>8) Approved power adaptor.</li></ol></li></ul> |                          |
| <b>Model Differences –</b><br>N/A  |                          |
| <b>Additional application considerations – (Considerations used to test a component or sub-assembly) –</b><br>N/A  |                          |



| ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:  |                                   |
|---|-----------------------------------|
| (Note 1: Identify the following six (6) energy source forms based on the origin of the energy.)<br>(Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.) |                                   |
| <b>Electrically-caused injury (Clause 5):</b><br>(Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification)<br>Example: +5 V dc input   |                                   |
| ES1   |                                   |
| Source of electrical energy   | Corresponding classification (ES) |
| Output of external power adaptor  | ES1                               |
| All circuits  | ES1                               |
| Battery pack output   | ES1                               |
| <b>Electrically-caused fire (Clause 6):</b><br>(Note: List sub-assembly or circuit designation and corresponding energy source classification)<br>Example: Battery pack (maximum 85 watts):   |                                   |
| PS2   |                                   |
| Source of power or PIS  | Corresponding classification (PS) |
| Output of external power adaptor  | PS3                               |
| All circuits  | PS3                               |
| Battery pack output   | PS3                               |
| <b>Injury caused by hazardous substances (Clause 7)</b><br>(Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.)<br>Example: Liquid in filled component   |                                   |
| Glycol  |                                   |
| Source of hazardous substances  | Corresponding chemical            |
| Battery   | See Annex M                       |
| <b>Mechanically-caused injury (Clause 8)</b><br>(Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.)<br>Example: Wall mount unit  |                                   |
| MS2   |                                   |
| Source of kinetic/mechanical energy   | Corresponding classification (MS) |
| Sharp edges and corners   | MS1                               |
| Equipment mass (<7kg)   | MS1                               |
| Plastic fan blade (DC Fan)  | MS3                               |
| Wall mount  | MS3                               |
| <b>Thermal burn injury (Clause 9)</b><br>(Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.)<br>Example: Hand-held scanner – thermoplastic enclosure   |                                   |
| TS1   |                                   |
| Source of thermal energy  | Corresponding classification (TS) |
| External accessible parts   | TS1                               |
| Inside component surface  | TS3                               |



**ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:****Radiation (Clause 10)**

(Note: List the types of radiation present in the product and the corresponding energy source classification.)  
Example: DVD – Class 1 Laser Product RS1

| Type of radiation      | Corresponding classification (RS) |
|------------------------|-----------------------------------|
| LED indicator          | RS1                               |
| LED chip for projector | RS1                               |

**ENERGY SOURCE DIAGRAM**

Indicate which energy sources are included in the energy source diagram. Insert diagram below

See ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE for details

☐ ES   ☐ PS   ☐ MS   ☐ TS   ☐ RS



| OVERVIEW OF EMPLOYED SAFEGUARDS  |  |                               |                     |                           |
|--|--|-------------------------------|---------------------|---------------------------|
| Clause   | Possible Hazard                                |                               |                     |                           |
| 5.1  | Electrically-caused injury                     |                               |                     |                           |
| Body Part<br>(e.g. Ordinary)   | Energy Source<br>(ES3: Primary Filter circuit) | Safeguards                    |                     |                           |
|  |  | Basic                         | Supplementary       | Reinforced<br>(Enclosure) |
| N/A  | N/A  | N/A                           | N/A                 | N/A                       |
| 6.1  | Electrically-caused fire                       |                               |                     |                           |
| Material part<br>(e.g. mouse enclosure)                                | Energy Source<br>(PS2: 100 Watt circuit)       | Safeguards                    |                     |                           |
|  |  | Basic                         | Supplementary       | Reinforced                |
| Enclosure  | PS3 circuit                                    | See 6.3                       | See 6.4.5,<br>6.4.6 | N/A                       |
| PCB  | PS3 circuit                                    | See 6.3                       | V-1 or better       | N/A                       |
| Internal/external wiring   | PS3 circuit                                    | N/A                           | N/A                 | See 6.5                   |
| All combustible material and components                                | PS3 circuit                                    | See 6.3                       | See 6.4.5,<br>6.4.6 | N/A                       |
| 7.1  | Injury caused by hazardous substances          |                               |                     |                           |
| Body Part<br>(e.g., skilled)   | Energy Source<br>(hazardous material)          | Safeguards                    |                     |                           |
|  |  | Basic                         | Supplementary       | Reinforced                |
| N/A  | N/A  | N/A                           | N/A                 | N/A                       |
| 8.1  | Mechanically-caused injury                     |                               |                     |                           |
| Body Part<br>(e.g. Ordinary)   | Energy Source<br>(MS3:High Pressure Lamp)      | Safeguards                    |                     |                           |
|  |  | Basic                         | Supplementary       | Reinforced<br>(Enclosure) |
| Ordinary   | MS3: Plastic fan blade<br>(DC fan)             | N/A                           | N/A                 | Enclosure                 |
| Ordinary   | MS3: Wall mount                                | N/A                           | N/A                 | See 8.7                   |
| 9.1  | Thermal Burn                                   |                               |                     |                           |
| Body Part<br>(e.g., Ordinary)  | Energy Source<br>(TS2)                         | Safeguards                    |                     |                           |
|  |  | Basic                         | Supplementary       | Reinforced                |
| Ordinary   | TS3: inside component<br>surface               | N/A                           | N/A                 | Enclosure                 |
| 10.1   | Radiation                                      |                               |                     |                           |
| Body Part<br>(e.g., Ordinary)  | Energy Source<br>(Output from audio port)      | Safeguards                    |                     |                           |
|  |  | Basic                         | Supplementary       | Reinforced                |
| Ordinary   | RS2: LED chip for<br>projector                 | Complied<br>with IEC<br>62471 | N/A                 | N/A                       |
| Supplementary Information:   |  |                               |                     |                           |
| (1) See attached energy source diagram for additional details.         |  |                               |                     |                           |
| (2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault |  |                               |                     |                           |



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

|          |  |  |     |
|----------|--|--|-----|
| <b>4</b> | <b>GENERAL REQUIREMENTS</b>  |  | P   |
| 4.1.1    | Acceptance of materials, components and subassemblies                  | (See appended table 4.1.2)   | P   |
| 4.1.2    | Use of components  | Components and subassemblies which are comply with the requirements of this standard or within the safety aspects of the relevant IEC component standards.<br>(See appended table 4.1.2) | P   |
| 4.1.3    | Equipment design and construction                                      |  | P   |
| 4.1.15   | Markings and instructions.....:  | (See Annex F)  | P   |
| 4.4.4    | Safeguard robustness   | See below.   | P   |
| 4.4.4.2  | Steady force tests.....:   | (See Annex T.5)  | P   |
| 4.4.4.3  | Drop tests.....:   |  | N/A |
| 4.4.4.4  | Impact tests.....:   | (See Annex T.6)  | P   |
| 4.4.4.5  | Internal accessible safeguard enclosure and barrier tests.....:        |  | N/A |
| 4.4.4.6  | Glass Impact tests.....:   |  | N/A |
| 4.4.4.7  | Thermoplastic material tests.....:                                     | (See Annex T.8)  | P   |
| 4.4.4.8  | Air comprising a safeguard.....:                                       |  | N/A |
| 4.4.4.9  | Accessibility and safeguard effectiveness                              |  | P   |
| 4.5      | Explosion  |  | P   |
| 4.6      | Fixing of conductors   |  | N/A |
| 4.6.1    | Fix conductors not to defeat a safeguard                               |  | N/A |
| 4.6.2    | 10 N force test applied to.....:                                       |  | N/A |
| 4.7      | Equipment for direct insertion into mains socket - outlets             |  | N/A |
| 4.7.2    | Mains plug part complies with the relevant standard.....:              |  | N/A |
| 4.7.3    | Torque (Nm).....:  |  | N/A |
| 4.8      | Products containing coin/button cell batteries                         |  | N/A |
| 4.8.2    | Instructional safeguard  |  | N/A |
| 4.8.3    | Battery Compartment Construction                                       |  | N/A |
|          | Means to reduce the possibility of children removing the battery.....: |  | —   |
| 4.8.4    | Battery Compartment Mechanical Tests.....:                             |  | N/A |
| 4.8.5    | Battery Accessibility  |  | N/A |
| 4.9      | Likelihood of fire or shock due to entry of                            | (See Annex P)  | P   |



| IEC 62368-1 |   |  |          |
|-------------|---|--|----------|
| Clause      | Requirement + Test  | Result - Remark  | Verdict  |
|             | conductive object..... :  |  |          |
| <b>5</b>    | <b>ELECTRICALLY-CAUSED INJURY</b>   |  | <b>P</b> |
| 5.2.1       | Electrical energy source classifications..... :                                       | See Energy source identification and classification table. | P        |
| 5.2.2       | ES1, ES2 and ES3 limits   |  | P        |
| 5.2.2.2     | Steady-state voltage and current..... :   |  | N/A      |
| 5.2.2.3     | Capacitance limits..... :   |  | N/A      |
| 5.2.2.4     | Single pulse limits..... :  |  | N/A      |
| 5.2.2.5     | Limits for repetitive pulses..... :   |  | N/A      |
| 5.2.2.6     | Ring signals..... :   |  | N/A      |
| 5.2.2.7     | Audio signals..... :  |  | N/A      |
| 5.3         | Protection against electrical energy sources  |  | N/A      |
| 5.3.1       | General Requirements for accessible parts to ordinary, instructed and skilled persons |  | N/A      |
| 5.3.2.1     | Accessibility to electrical energy sources and safeguards                             |  | N/A      |
| 5.3.2.2     | Contact requirements  |  | N/A      |
|             | a) Test with test probe from Annex V..... :   |  | N/A      |
|             | b) Electric strength test potential (V)..... :  |  | N/A      |
|             | c) Air gap (mm)..... :  |  | N/A      |
| 5.3.2.4     | Terminals for connecting stripped wire  |  | N/A      |
| 5.4         | Insulation materials and requirements   |  | N/A      |
| 5.4.1.2     | Properties of insulating material   |  | N/A      |
| 5.4.1.3     | Humidity conditioning..... :  |  | N/A      |
| 5.4.1.4     | Maximum operating temperature for insulating materials..... :                         |  | N/A      |
| 5.4.1.5     | Pollution degree..... :   |  | —        |
| 5.4.1.5.2   | Test for pollution degree 1 environment and for an insulating compound                |  | N/A      |
| 5.4.1.5.3   | Thermal cycling   |  | N/A      |
| 5.4.1.6     | Insulation in transformers with varying dimensions                                    |  | N/A      |
| 5.4.1.7     | Insulation in circuits generating starting pulses                                     |  | N/A      |
| 5.4.1.8     | Determination of working voltage  |  | N/A      |
| 5.4.1.9     | Insulating surfaces   |  | N/A      |
| 5.4.1.10    | Thermoplastic parts on which conductive metallic parts are directly mounted           |  | N/A      |
| 5.4.1.10.2  | Vicat softening temperature..... :  |  | N/A      |



| IEC 62368-1 |   |                 |         |
|-------------|---|-----------------|---------|
| Clause      | Requirement + Test  | Result - Remark | Verdict |
| 5.4.1.10.3  | Ball pressure .....   |                 | N/A     |
| 5.4.2       | Clearances  |                 | N/A     |
| 5.4.2.2     | Determining clearance using peak working voltage                        |                 | N/A     |
| 5.4.2.3     | Determining clearance using required withstand voltage .....            |                 | N/A     |
|             | a) a.c. mains transient voltage .....                                   |                 | —       |
|             | b) d.c. mains transient voltage .....                                   |                 | —       |
|             | c) external circuit transient voltage .....                             |                 | —       |
|             | d) transient voltage determined by measurement .....                    |                 | —       |
| 5.4.2.4     | Determining the adequacy of a clearance using an electric strength test |                 | N/A     |
| 5.4.2.5     | Multiplication factors for clearances and test voltages .....           |                 | N/A     |
| 5.4.3       | Creepage distances .....  |                 | N/A     |
| 5.4.3.1     | General   |                 | N/A     |
| 5.4.3.3     | Material Group .....  |                 | —       |
| 5.4.4       | Solid insulation  |                 | N/A     |
| 5.4.4.2     | Minimum distance through insulation .....                               |                 | N/A     |
| 5.4.4.3     | Insulation compound forming solid insulation                            |                 | N/A     |
| 5.4.4.4     | Solid insulation in semiconductor devices                               |                 | N/A     |
| 5.4.4.5     | Cemented joints   |                 | N/A     |
| 5.4.4.6     | Thin sheet material   |                 | N/A     |
| 5.4.4.6.1   | General requirements  |                 | N/A     |
| 5.4.4.6.2   | Separable thin sheet material   |                 | N/A     |
|             | Number of layers (pcs) .....  |                 | N/A     |
| 5.4.4.6.3   | Non-separable thin sheet material                                       |                 | N/A     |
| 5.4.4.6.4   | Standard test procedure for non-separable thin sheet material .....     |                 | N/A     |
| 5.4.4.6.5   | Mandrel test  |                 | N/A     |
| 5.4.4.7     | Solid insulation in wound components                                    |                 | N/A     |
| 5.4.4.9     | Solid insulation at frequencies >30 kHz .....                           |                 | N/A     |
| 5.4.5       | Antenna terminal insulation   |                 | N/A     |
| 5.4.5.1     | General   |                 | N/A     |
| 5.4.5.2     | Voltage surge test  |                 | N/A     |
|             | Insulation resistance (MΩ).....   |                 | —       |
| 5.4.6       | Insulation of internal wire as part of supplementary safeguard .....    |                 | N/A     |



| IEC 62368-1 |   |                 |         |
|-------------|---|-----------------|---------|
| Clause      | Requirement + Test  | Result - Remark | Verdict |
| 5.4.7       | Tests for semiconductor components and for cemented joints                      |                 | N/A     |
| 5.4.8       | Humidity conditioning   |                 | N/A     |
|             | Relative humidity (%).....:   |                 | —       |
|             | Temperature (°C) .....  |                 | —       |
|             | Duration (h) .....  |                 | —       |
| 5.4.9       | Electric strength test .....  |                 | N/A     |
| 5.4.9.1     | Test procedure for a solid insulation type test                                 |                 | N/A     |
| 5.4.9.2     | Test procedure for routine tests  |                 | N/A     |
| 5.4.10      | Protection against transient voltages between external circuit                  |                 | N/A     |
| 5.4.10.1    | Parts and circuits separated from external circuits                             |                 | N/A     |
| 5.4.10.2    | Test methods  |                 | N/A     |
| 5.4.10.2.1  | General   |                 | N/A     |
| 5.4.10.2.2  | Impulse test .....  |                 | N/A     |
| 5.4.10.2.3  | Steady-state test.....:   |                 | N/A     |
| 5.4.11      | Insulation between external circuits and earthed circuitry .....                |                 | N/A     |
| 5.4.11.1    | Exceptions to separation between external circuits and earth                    |                 | N/A     |
| 5.4.11.2    | Requirements  |                 | N/A     |
|             | Rated operating voltage $U_{op}$ (V).....:                                      |                 | —       |
|             | Nominal voltage $U_{peak}$ (V).....:  |                 | —       |
|             | Max increase due to variation $U_{sp}$ .....                                    |                 | —       |
|             | Max increase due to ageing $\Delta U_{sa}$ .....                                |                 | —       |
|             | $U_{op} = U_{peak} + \Delta U_{sp} + \Delta U_{sa}$ .....                       |                 | —       |
| 5.5         | Components as safeguards  |                 |         |
| 5.5.1       | General   |                 | N/A     |
| 5.5.2       | Capacitors and RC units   |                 | N/A     |
| 5.5.2.1     | General requirement   |                 | N/A     |
| 5.5.2.2     | Safeguards against capacitor discharge after disconnection of a connector.....: |                 | N/A     |
| 5.5.3       | Transformers  |                 | N/A     |
| 5.5.4       | Optocouplers  |                 | N/A     |
| 5.5.5       | Relays  |                 | N/A     |
| 5.5.6       | Resistors   |                 | N/A     |
| 5.5.7       | SPD's   |                 | N/A     |



| IEC 62368-1 |   |                 |         |
|-------------|---|-----------------|---------|
| Clause      | Requirement + Test  | Result - Remark | Verdict |
| 5.5.7.1     | Use of an SPD connected to reliable earthing  |                 | N/A     |
| 5.5.7.2     | Use of an SPD between mains and protective earth  |                 | N/A     |
| 5.5.8       | Insulation between the mains and external circuit consisting of a coaxial cable.....:   |                 | N/A     |
| 5.6         | Protective conductor  |                 | N/A     |
| 5.6.2       | Requirement for protective conductors   |                 | N/A     |
| 5.6.2.1     | General requirements  |                 | N/A     |
| 5.6.2.2     | Colour of insulation  |                 | N/A     |
| 5.6.3       | Requirement for protective earthing conductors  |                 | N/A     |
|             | Protective earthing conductor size (mm <sup>2</sup> ) .....                             |                 | —       |
| 5.6.4       | Requirement for protective bonding conductors   |                 | N/A     |
| 5.6.4.1     | Protective bonding conductors   |                 | N/A     |
|             | Protective bonding conductor size (mm <sup>2</sup> ). .....                             |                 | —       |
|             | Protective current rating (A) .....   |                 | —       |
| 5.6.4.3     | Current limiting and overcurrent protective devices                                     |                 | N/A     |
| 5.6.5       | Terminals for protective conductors   |                 | N/A     |
| 5.6.5.1     | Requirement   |                 | N/A     |
|             | Conductor size (mm <sup>2</sup> ), nominal thread diameter (mm). .....                  |                 | N/A     |
| 5.6.5.2     | Corrosion   |                 | N/A     |
| 5.6.6       | Resistance of the protective system   |                 | N/A     |
| 5.6.6.1     | Requirements  |                 | N/A     |
| 5.6.6.2     | Test Method Resistance (Ω).....:  |                 | N/A     |
| 5.6.7       | Reliable earthing   |                 | N/A     |
| 5.7         | Prospective touch voltage, touch current and protective conductor current               |                 | N/A     |
| 5.7.2       | Measuring devices and networks  |                 | N/A     |
| 5.7.2.1     | Measurement of touch current .....  |                 | N/A     |
| 5.7.2.2     | Measurement of prospective touch voltage  |                 | N/A     |
| 5.7.3       | Equipment set-up, supply connections and earth connections                              |                 | N/A     |
|             | System of interconnected equipment (separate connections/single connection) .....       |                 | —       |
|             | Multiple connections to mains (one connection at a time/simultaneous connections) ..... |                 | —       |
| 5.7.4       | Earthed conductive accessible parts .....   |                 | N/A     |
| 5.7.5       | Protective conductor current  |                 | N/A     |



| IEC 62368-1 |   |                 |         |
|-------------|---|-----------------|---------|
| Clause      | Requirement + Test  | Result - Remark | Verdict |
|             | Supply Voltage (V).....:  |                 | —       |
|             | Measured current (mA).....:   |                 | —       |
|             | Instructional Safeguard.....:   |                 | N/A     |
| 5.7.6       | Prospective touch voltage and touch current due to external circuits                          |                 | N/A     |
| 5.7.6.1     | Touch current from coaxial cables   |                 | N/A     |
| 5.7.6.2     | Prospective touch voltage and touch current from external circuits                            |                 | N/A     |
| 5.7.7       | Summation of touch currents from external circuits  |                 | N/A     |
|             | a) Equipment with earthed external circuits<br>Measured current (mA).....:                    |                 | N/A     |
|             | b) Equipment whose external circuits are not referenced to earth. Measured current (mA).....: |                 | N/A     |

|           |  |  |          |
|-----------|--|--|----------|
| <b>6</b>  | <b>ELECTRICALLY- CAUSED FIRE</b>   |  | <b>P</b> |
| 6.2       | Classification of power sources (PS) and potential ignition sources (PIS)  |  | P        |
| 6.2.2     | Power source circuit classifications   | See Energy source identification and classification table. | P        |
| 6.2.2.1   | General  |  | P        |
| 6.2.2.2   | Power measurement for worst-case load fault ... :  |  | N/A      |
| 6.2.2.3   | Power measurement for worst-case power source fault.....:  |  | N/A      |
| 6.2.2.4   | PS1.....:  |  | N/A      |
| 6.2.2.5   | PS2.....:  | See 6.2.2  | P        |
| 6.2.2.6   | PS3.....:  | See 6.2.2  | P        |
| 6.2.3     | Classification of potential ignition sources   | See Energy source identification and classification table. | P        |
| 6.2.3.1   | Arcing PIS.....:   | See 6.2.3  | P        |
| 6.2.3.2   | Resistive PIS.....:  | See 6.2.3  | P        |
| 6.3       | Safeguards against fire under normal operating and abnormal operating conditions   |  | P        |
| 6.3.1 (a) | No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials.....: | (See appended table 5.4.1.4, 6.3.2, 9.0, B.2.6)            | P        |
| 6.3.1 (b) | Combustible materials outside fire enclosure   |  | P        |
| 6.4       | Safeguards against fire under single fault conditions  |  | P        |
| 6.4.1     | Safeguard Method   | Method of control fire spread used.                        | P        |
| 6.4.2     | Reduction of the likelihood of ignition under single fault conditions in PS1 circuits  |  | N/A      |





| IEC 62368-1 |   |   |         |
|-------------|---|---|---------|
| Clause      | Requirement + Test  | Result - Remark   | Verdict |
| 6.4.3       | Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits |   | N/A     |
| 6.4.3.1     | General   |   | N/A     |
| 6.4.3.2     | Supplementary Safeguards  |   | N/A     |
|             | Special conditions if conductors on printed boards are opened or peeled                       |   | N/A     |
| 6.4.3.3     | Single Fault Conditions ..... :   |   | N/A     |
|             | Special conditions for temperature limited by fuse  |   | N/A     |
| 6.4.4       | Control of fire spread in PS1 circuits  |   | N/A     |
| 6.4.5       | Control of fire spread in PS2 circuits  |   | P       |
| 6.4.5.2     | Supplementary safeguards ..... :  | Components other than PCB and wires are:<br>- mounted on PCB rated V-1 or better, or<br>- made of V-2/VTM-2 or better.<br>(See appended tables 4.1.2 and Annex G) | P       |
| 6.4.6       | Control of fire spread in PS3 circuit   |   | P       |
| 6.4.7       | Separation of combustible materials from a PIS  |   | N/A     |
| 6.4.7.1     | General ..... :   |   | N/A     |
| 6.4.7.2     | Separation by distance  |   | N/A     |
| 6.4.7.3     | Separation by a fire barrier  |   | N/A     |
| 6.4.8       | Fire enclosures and fire barriers   |   | P       |
| 6.4.8.1     | Fire enclosure and fire barrier material properties   |   | P       |
| 6.4.8.2.1   | Requirements for a fire barrier   |   | N/A     |
| 6.4.8.2.2   | Requirements for a fire enclosure   |   | P       |
| 6.4.8.3     | Constructional requirements for a fire enclosure and a fire barrier                           |   | P       |
| 6.4.8.3.1   | Fire enclosure and fire barrier openings  |   | P       |
| 6.4.8.3.2   | Fire barrier dimensions   |   | N/A     |
| 6.4.8.3.3   | Top Openings in Fire Enclosure: dimensions (mm) ..... :                                       | Top: no openings.<br>Left/Right: max. 2.0 x 2.0 mm<br>No PIS within 15 mm diameter of enclosure.  | P       |
|             | Needle Flame test   |   | N/A     |
| 6.4.8.3.4   | Bottom Openings in Fire Enclosure, condition met a), b) and/or c) dimensions (mm) ..... :     | Bottom: 1) Ø 3.0mm;<br>2) 1mm in width regardless;<br>3) max. 2.0 x 2.0 mm<br>No PIS within 15 mm diameter of enclosure.  | P       |



| IEC 62368-1 |   |   |         |
|-------------|---|---|---------|
| Clause      | Requirement + Test  | Result - Remark   | Verdict |
|             | Flammability tests for the bottom of a fire enclosure .....                                       |   | N/A     |
| 6.4.8.3.5   | Integrity of the fire enclosure, condition met: a), b) or c) .....                                |   | N/A     |
| 6.4.8.4     | Separation of PIS from fire enclosure and fire barrier distance (mm) or flammability rating ..... | Enclosure is made of metal.   | P       |
| 6.5         | Internal and external wiring  |   | P       |
| 6.5.1       | Requirements  | VW-1 wiring used, test method was considered equivalent to IEC/TS 60695-11-21 | P       |
| 6.5.2       | Cross-sectional area (mm <sup>2</sup> ) .....   | See above   | —       |
| 6.5.3       | Requirements for interconnection to building wiring .....   |   | N/A     |
| 6.6         | Safeguards against fire due to connection to additional equipment                                 |   | P       |
|             | External port limited to PS2 or complies with Clause Q.1  | See appended table annex Q.1.   | P       |

|          |  |              |          |
|----------|--|--------------|----------|
| <b>7</b> | <b>INJURY CAUSED BY HAZARDOUS SUBSTANCES</b>     |              | <b>P</b> |
| 7.2      | Reduction of exposure to hazardous substances    |              | N/A      |
| 7.3      | Ozone exposure                                   |              | N/A      |
| 7.4      | Use of personal safeguards (PPE)                 |              | N/A      |
|          | Personal safeguards and instructions .....       |              | —        |
| 7.5      | Use of instructional safeguards and instructions |              | N/A      |
|          | Instructional safeguard (ISO 7010) .....         |              | —        |
| 7.6      | Batteries.....                                   | See Annex M. | P        |



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

|           |   |  |     |
|-----------|---|--|-----|
| <b>8</b>  | <b>MECHANICALLY-CAUSED INJURY</b>   |  | P   |
| 8.1       | General   |  | P   |
| 8.2       | Mechanical energy source classifications                                    | See Energy source identification and classification table.                             | P   |
| 8.3       | Safeguards against mechanical energy sources                                |  | P   |
| 8.4       | Safeguards against parts with sharp edges and corners                       |  | N/A |
| 8.4.1     | Safeguards  |  | N/A |
| 8.5       | Safeguards against moving parts   |  | P   |
| 8.5.1     | MS2 or MS3 part required to be accessible for the function of the equipment | A metal enclosure protects the DC fans. It could not access into the blade of DC fans. | P   |
| 8.5.2     | Instructional Safeguard .....   | N/A  | —   |
| 8.5.4     | Special categories of equipment comprising moving parts                     |  | N/A |
| 8.5.4.1   | Large data storage equipment  |  | N/A |
| 8.5.4.2   | Equipment having electromechanical device for destruction of media          |  | N/A |
| 8.5.4.2.1 | Safeguards and Safety Interlocks .....                                      |  | N/A |
| 8.5.4.2.2 | Instructional safeguards against moving parts                               |  | N/A |
|           | Instructional Safeguard .....   |  | —   |
| 8.5.4.2.3 | Disconnection from the supply   |  | N/A |
| 8.5.4.2.4 | Probe type and force (N) .....  |  | N/A |
| 8.5.5     | High Pressure Lamps   |  | N/A |
| 8.5.5.1   | Energy Source Classification  |  | N/A |
| 8.5.5.2   | High Pressure Lamp Explosion Test.....                                      |  | N/A |
| 8.6       | Stability   |  | N/A |
| 8.6.1     | Product classification  |  | N/A |
|           | Instructional Safeguard .....   |  | —   |
| 8.6.2     | Static stability  |  | N/A |
| 8.6.2.2   | Static stability test   |  | N/A |
|           | Applied Force .....   |  | —   |
| 8.6.2.3   | Downward Force Test   |  | N/A |
| 8.6.3     | Relocation stability test   |  | N/A |
|           | Unit configuration during 10° tilt.....                                     |  | —   |
| 8.6.4     | Glass slide test  |  | N/A |



| IEC 62368-1 |   |   |         |
|-------------|---|---|---------|
| Clause      | Requirement + Test  | Result - Remark   | Verdict |
| 8.6.5       | Horizontal force test (Applied Force).....:                       |   | N/A     |
|             | Position of feet or movable parts.....:                           |   | —       |
| 8.7         | Equipment mounted to wall or ceiling                              | Equipment may be mounted > 2m   | P       |
| 8.7.1       | Mounting Means (Length of screws (mm) and mounting surface) ..... | Length of screw (4×M4): 10.5 mm;<br>Mounting surface: ceiling.  | P       |
| 8.7.2       | Direction and applied force.....:                                 | <p>Test 1: applied 83N (3 times the weight of equipment). A force in addition to the weight of the equipment is applied downwards through the centre of gravity of the equipment, for 1 min. In addition, a horizontal force of 50N is applied laterally for 60 s.</p> <p>Test 2: applied 111N (4 times the weight of equipment, total 4 screws, each one test force: 28N). Each point in the mounting system shall be subjected to a shear force perpendicular to its centre axis for 1 min. The force shall be applied in four directions, one direction at a time, separated by 90°.</p> <p>Each point in the mounting system, one at a time, shall be subjected to an inward directed push force parallel to its centre axis for 1 min.</p> <p>Each point in the mounting system, one at a time, shall be subjected to an outward directed pull force parallel to its centre axis for 1 min.</p> <p>Test 3: Metal screw (Ø4.0mm) for attachment of the mounting means. Each threaded part subjected to 0.6 N-m and repeat 5 times. The each threaded part not become dislodged and remain mechanically intact and secure during the test.</p> | P       |
| 8.8         | Handles strength  |   | N/A     |
| 8.8.1       | Classification  |   | N/A     |
| 8.8.2       | Applied Force .....   |   | N/A     |
| 8.9         | Wheels or casters attachment requirements                         |   | N/A     |
| 8.9.1       | Classification  |   | N/A     |
| 8.9.2       | Applied force .....   |   | —       |
| 8.10        | Carts, stands and similar carriers                                |   | N/A     |
| 8.10.1      | General   |   | N/A     |
| 8.10.2      | Marking and instructions  |   | N/A     |



| IEC 62368-1 |  |                 |         |
|-------------|--|-----------------|---------|
| Clause      | Requirement + Test                                 | Result - Remark | Verdict |
|             | Instructional Safeguard .....                      |                 | —       |
| 8.10.3      | Cart, stand or carrier loading test and compliance |                 | N/A     |
|             | Applied force .....                                |                 | —       |
| 8.10.4      | Cart, stand or carrier impact test                 |                 | N/A     |
| 8.10.5      | Mechanical stability                               |                 | N/A     |
|             | Applied horizontal force (N) .....                 |                 | —       |
| 8.10.6      | Thermoplastic temperature stability (°C) .....     |                 | N/A     |
| 8.11        | Mounting means for rack mounted equipment          |                 | N/A     |
| 8.11.1      | General  |                 | N/A     |
| 8.11.2      | Product Classification                             |                 | N/A     |
| 8.11.3      | Mechanical strength test, variable <i>N</i> .....  |                 | N/A     |
| 8.11.4      | Mechanical strength test 250N, including end stops |                 | N/A     |
| 8.12        | Telescoping or rod antennas .....                  |                 | N/A     |
|             | Button/Ball diameter (mm) .....                    |                 | —       |

|          |  |  |     |
|----------|--|--|-----|
| <b>9</b> | <b>THERMAL BURN INJURY</b>               |  | P   |
| 9.2      | Thermal energy source classifications    | See Energy source identification and classification table. | P   |
| 9.3      | Safeguard against thermal energy sources |  | P   |
| 9.4      | Requirements for safeguards              |  | P   |
| 9.4.1    | Equipment safeguard                      |  | P   |
| 9.4.2    | Instructional safeguard .....            |  | N/A |

|           |  |  |     |
|-----------|--|--|-----|
| <b>10</b> | <b>RADIATION</b>                                       |  | P   |
| 10.2      | Radiation energy source classification                 | See Energy source identification and classification table. | P   |
| 10.2.1    | General classification                                 |  | P   |
| 10.3      | Protection against laser radiation                     |  | N/A |
|           | Laser radiation that exists equipment:                 |  | —   |
|           | Normal, abnormal, single-fault .....                   |  | N/A |
|           | Instructional safeguard .....                          |  | —   |
|           | Tool .....   |  | —   |
| 10.4      | Protection against visible, infrared, and UV radiation |  | P   |
| 10.4.1    | General  |  | P   |
| 10.4.1.a) | RS3 for Ordinary and instructed persons .....          |  | N/A |



| IEC 62368-1 |   |                            |         |
|-------------|---|----------------------------|---------|
| Clause      | Requirement + Test  | Result - Remark            | Verdict |
| 10.4.1.b)   | RS3 accessible to a skilled person..... :   |                            | N/A     |
|             | Personal safeguard (PPE) instructional safeguard..... :   |                            | —       |
| 10.4.1.c)   | Equipment visible, IR, UV does not exceed RS1 . :   |                            | N/A     |
| 10.4.1.d)   | Normal, abnormal, single-fault conditions ..... :   | (See appended table 4.1.2) | P       |
| 10.4.1.e)   | Enclosure material employed as safeguard is opaque..... :                                       |                            | N/A     |
| 10.4.1.f)   | UV attenuation..... :   |                            | N/A     |
| 10.4.1.g)   | Materials resistant to degradation UV ..... :   |                            | N/A     |
| 10.4.1.h)   | Enclosure containment of optical radiation..... :   |                            | N/A     |
| 10.4.1.i)   | Exempt Group under normal operating conditions..... :   |                            | N/A     |
| 10.4.2      | Instructional safeguard ..... :   |                            | N/A     |
| 10.5        | Protection against x-radiation  |                            | N/A     |
| 10.5.1      | X- radiation energy source that exists equipment :<br>Normal, abnormal, single fault conditions |                            | N/A     |
|             | Equipment safeguards..... :   |                            | N/A     |
|             | Instructional safeguard for skilled person..... :   |                            | N/A     |
| 10.5.3      | Most unfavourable supply voltage to give maximum radiation ..... :                              |                            | —       |
|             | Abnormal and single-fault condition ..... :   |                            | N/A     |
|             | Maximum radiation (pA/kg)..... :  |                            | N/A     |
| 10.6        | Protection against acoustic energy sources  |                            | N/A     |
| 10.6.1      | General   |                            | N/A     |
| 10.6.2      | Classification  |                            | N/A     |
|             | Acoustic output, dB(A) ..... :  |                            | N/A     |
|             | Output voltage, unweighted r.m.s..... :   |                            | N/A     |
| 10.6.4      | Protection of persons   |                            | N/A     |
|             | Instructional safeguards ..... :  |                            | N/A     |
|             | Equipment safeguard prevent ordinary person to RS2..... :                                       |                            | —       |
|             | Means to actively inform user of increase sound pressure..... :                                 |                            | —       |
|             | Equipment safeguard prevent ordinary person to RS2..... :                                       |                            | —       |
| 10.6.5      | Requirements for listening devices (headphones, earphones, etc.)                                |                            | N/A     |
| 10.6.5.1    | Corded passive listening devices with analog input  |                            | N/A     |



| IEC 62368-1 |   |                 |         |
|-------------|---|-----------------|---------|
| Clause      | Requirement + Test  | Result - Remark | Verdict |
|             | Input voltage with 94 dB(A) $L_{Aeq}$ acoustic pressure output..... : |                 | —       |
| 10.6.5.2    | Corded listening devices with digital input                           |                 | N/A     |
|             | Maximum dB(A)..... :  |                 | —       |
| 10.6.5.3    | Cordless listening device   |                 | N/A     |
|             | Maximum dB(A)..... :  |                 | —       |

|          |  |  |     |
|----------|--|--|-----|
| <b>B</b> | <b>NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS</b> |  | P   |
| B.2      | Normal Operating Conditions  |  | P   |
| B.2.1    | General requirements..... :  | (See Test Item Particulars and appended test tables) | P   |
|          | Audio Amplifiers and equipment with audio amplifiers ..... :   |  | N/A |
| B.2.3    | Supply voltage and tolerances  |  | P   |
| B.2.5    | Input test..... :  | (See appended table B.2.5)                           | P   |
| B.3      | Simulated abnormal operating conditions  |  | P   |
| B.3.1    | General requirements..... :  | (See appended table B.3)                             | P   |
| B.3.2    | Covering of ventilation openings   | (See appended table B.3)                             | P   |
| B.3.3    | D.C. mains polarity test   |  | N/A |
| B.3.4    | Setting of voltage selector ..... :  |  | N/A |
| B.3.5    | Maximum load at output terminals ..... :   | (See appended table B.3)                             | P   |
| B.3.6    | Reverse battery polarity   |  | N/A |
| B.3.7    | Abnormal operating conditions as specified in Clause E.2.  |  | N/A |
| B.3.8    | Safeguards functional during and after abnormal operating conditions   | All safeguards remained effectively.                 | P   |
| B.4      | Simulated single fault conditions  |  | P   |
| B.4.2    | Temperature controlling device open or short-circuited ..... :   |  | N/A |
| B.4.3    | Motor tests  | Approved DC fan sources used.                        | P   |
| B.4.3.1  | Motor blocked or rotor locked increasing the internal ambient temperature ..... :                            | (See appended table B.4)                             | P   |
| B.4.4    | Short circuit of functional insulation   |  | P   |
| B.4.4.1  | Short circuit of clearances for functional insulation  |  | P   |
| B.4.4.2  | Short circuit of creepage distances for functional insulation  |  | P   |
| B.4.4.3  | Short circuit of functional insulation on coated printed boards  |  | N/A |



| IEC 62368-1 |   |                           |         |
|-------------|---|---------------------------|---------|
| Clause      | Requirement + Test  | Result - Remark           | Verdict |
| B.4.5       | Short circuit and interruption of electrodes in tubes and semiconductors                  |                           | N/A     |
| B.4.6       | Short circuit or disconnect of passive components   |                           | N/A     |
| B.4.7       | Continuous operation of components  |                           | N/A     |
| B.4.8       | Class 1 and Class 2 energy sources within limits during and after single fault conditions |                           | P       |
| B.4.9       | Battery charging under single fault conditions ... :                                      | See Annex M               | P       |
| <b>C</b>    | <b>UV RADIATION</b>   |                           | N/A     |
| C.1         | Protection of materials in equipment from UV radiation                                    |                           | N/A     |
| C.1.2       | Requirements  |                           | N/A     |
| C.1.3       | Test method   |                           | N/A     |
| C.2         | UV light conditioning test  |                           | N/A     |
| C.2.1       | Test apparatus  |                           | N/A     |
| C.2.2       | Mounting of test samples  |                           | N/A     |
| C.2.3       | Carbon-arc light-exposure apparatus   |                           | N/A     |
| C.2.4       | Xenon-arc light exposure apparatus  |                           | N/A     |
| <b>D</b>    | <b>TEST GENERATORS</b>  |                           | N/A     |
| D.1         | Impulse test generators   |                           | N/A     |
| D.2         | Antenna interface test generator  |                           | N/A     |
| D.3         | Electronic pulse generator  |                           | N/A     |
| <b>E</b>    | <b>TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS</b>                          |                           | N/A     |
| E.1         | Audio amplifier normal operating conditions   |                           | N/A     |
|             | Audio signal voltage (V) .....  |                           | —       |
|             | Rated load impedance ( $\Omega$ ) .....   |                           |         |
| E.2         | Audio amplifier abnormal operating conditions   |                           | N/A     |
| <b>F</b>    | <b>EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS</b>                     |                           | P       |
| F.1         | General requirements  |                           | P       |
|             | Instructions – Language .....   | English                   | —       |
| F.2         | Letter symbols and graphical symbols  |                           | P       |
| F.2.1       | Letter symbols according to IEC60027-1  |                           | P       |
| F.2.2       | Graphic symbols IEC, ISO or manufacturer specific   |                           | P       |
| F.3         | Equipment markings  |                           | P       |
| F.3.1       | Equipment marking locations   |                           | P       |
| F.3.2       | Equipment identification markings   |                           | P       |
| F.3.2.1     | Manufacturer identification .....   | See copy of marking plate | —       |





| IEC 62368-1 |   |                           |         |
|-------------|---|---------------------------|---------|
| Clause      | Requirement + Test  | Result - Remark           | Verdict |
| F.3.2.2     | Model identification .....  | See copy of marking plate | —       |
| F.3.3       | Equipment rating markings   |                           | P       |
| F.3.3.1     | Equipment with direct connection to mains   |                           | N/A     |
| F.3.3.2     | Equipment without direct connection to mains  |                           | P       |
| F.3.3.3     | Nature of supply voltage.....   | See copy of marking plate | —       |
| F.3.3.4     | Rated voltage .....   | See copy of marking plate | —       |
| F.3.3.4     | Rated frequency .....   | N/A                       | —       |
| F.3.3.6     | Rated current or rated power .....  | See copy of marking plate | —       |
| F.3.3.7     | Equipment with multiple supply connections  |                           | N/A     |
| F.3.4       | Voltage setting device  |                           | N/A     |
| F.3.5       | Terminals and operating devices   |                           | P       |
| F.3.5.1     | Mains appliance outlet and socket-outlet markings.....                              |                           | N/A     |
| F.3.5.2     | Switch position identification marking .....  |                           | N/A     |
| F.3.5.3     | Replacement fuse identification and rating markings.....                            |                           | N/A     |
| F.3.5.4     | Replacement battery identification marking .....                                    | See Clause F.5            | P       |
| F.3.5.5     | Terminal marking location   |                           | N/A     |
| F.3.6       | Equipment markings related to equipment classification                              |                           | N/A     |
| F.3.6.1     | Class I Equipment   |                           | N/A     |
| F.3.6.1.1   | Protective earthing conductor terminal  |                           | N/A     |
| F.3.6.1.2   | Neutral conductor terminal  |                           | N/A     |
| F.3.6.1.3   | Protective bonding conductor terminals  |                           | N/A     |
| F.3.6.2     | Class II equipment (IEC60417-5172)  |                           | N/A     |
| F.3.6.2.1   | Class II equipment with or without functional earth                                 |                           | N/A     |
| F.3.6.2.2   | Class II equipment with functional earth terminal marking                           |                           | N/A     |
| F.3.7       | Equipment IP rating marking .....   | IPX0                      | —       |
| F.3.8       | External power supply output marking  |                           | N/A     |
| F.3.9       | Durability, legibility and permanence of marking                                    |                           | P       |
| F.3.10      | Test for permanence of markings   |                           | P       |
| F.4         | Instructions  |                           | P       |
|             | a) Equipment for use in locations where children not likely to be present - marking |                           | N/A     |
|             | b) Instructions given for installation or initial use                               |                           | P       |
|             | c) Equipment intended to be fastened in place                                       |                           | N/A     |



| IEC 62368-1   |   |                 |         |
|---------------|---|-----------------|---------|
| Clause        | Requirement + Test  | Result - Remark | Verdict |
|               | d) Equipment intended for use only in restricted access area  |                 | N/A     |
|               | e) Audio equipment terminals classified as ES3 and other equipment with terminals marked in accordance F.3.6.1                              |                 | N/A     |
|               | f) Protective earthing employed as safeguard  |                 | P       |
|               | g) Protective earthing conductor current exceeding ES 2 limits  |                 | N/A     |
|               | h) Symbols used on equipment  |                 | N/A     |
|               | i) Permanently connected equipment not provided with all-pole mains switch  |                 | N/A     |
| j)            | j) Replaceable components or modules providing safeguard function   |                 | N/A     |
| F.5           | Instructional safeguards  |                 | P       |
|               | Where "instructional safeguard" is referenced in the test report it specifies the required elements, location of marking and/or instruction |                 | P       |
| <b>G</b>      | <b>COMPONENTS</b>   |                 | P       |
| <b>G.1</b>    | <b>Switches</b>   |                 | N/A     |
| G.1.1         | General requirements  |                 | N/A     |
| G.1.2         | Ratings, endurance, spacing, maximum load   |                 | N/A     |
| <b>G.2</b>    | <b>Relays</b>   |                 | N/A     |
| G.2.1         | General requirements  |                 | N/A     |
| G.2.2         | Overload test   |                 | N/A     |
| G.2.3         | Relay controlling connectors supply power   |                 | N/A     |
| G.2.4         | Mains relay, modified as stated in G.2  |                 | N/A     |
| <b>G.3</b>    | <b>Protection Devices</b>   |                 | N/A     |
| G.3.1         | Thermal cut-offs  |                 | N/A     |
| G.3.1.1a) &b) | Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)  |                 | N/A     |
| G.3.1.1c)     | Thermal cut-outs tested as part of the equipment as indicated in c)   |                 | N/A     |
| G.3.1.2       | Thermal cut-off connections maintained and secure   |                 | N/A     |
| G.3.2         | Thermal links   |                 | N/A     |
| G.3.2.1a)     | Thermal links separately tested with IEC 60691  |                 | N/A     |
| G.3.2.1b)     | Thermal links tested as part of the equipment   |                 | N/A     |
|               | Aging hours (H) .....   |                 | —       |
|               | Single Fault Condition .....  |                 | —       |
|               | Test Voltage (V) and Insulation Resistance ( $\Omega$ ) :   |                 | —       |



| IEC 62368-1  |  |                            |         |
|--------------|--|----------------------------|---------|
| Clause       | Requirement + Test   | Result - Remark            | Verdict |
| G.3.3        | PTC Thermistors  |                            | N/A     |
| G.3.4        | Overcurrent protection devices   |                            | N/A     |
| G.3.5        | Safeguards components not mentioned in G.3.1 to G.3.5                                    |                            | N/A     |
| G.3.5.1      | Non-resettable devices suitably rated and marking provided                               |                            | N/A     |
| G.3.5.2      | Single faults conditions.....:   |                            | N/A     |
| <b>G.4</b>   | <b>Connectors</b>  |                            | P       |
| G.4.1        | Spacings   | Class III equipment        | N/A     |
| G.4.2        | Mains connector configuration .....  |                            | N/A     |
| G.4.3        | Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely |                            | P       |
| <b>G.5</b>   | <b>Wound Components</b>  |                            | N/A     |
| G.5.1        | Wire insulation in wound components.....   |                            | N/A     |
| G.5.1.2 a)   | Two wires in contact inside wound component, angle between 45° and 90°                   |                            | N/A     |
| G.5.1.2 b)   | Construction subject to routine testing  |                            | N/A     |
| G.5.2        | Endurance test on wound components   |                            | N/A     |
| G.5.2.1      | General test requirements  |                            | N/A     |
| G.5.2.2      | Heat run test  |                            | N/A     |
|              | Time (s) .....   |                            | —       |
|              | Temperature (°C) .....   |                            | —       |
| G.5.2.3      | Wound Components supplied by mains   |                            | N/A     |
| <b>G.5.3</b> | <b>Transformers</b>  |                            | N/A     |
| G.5.3.1      | Requirements applied (IEC61204-7, IEC61558-1/-2, and/or IEC62368-1).....:                |                            | N/A     |
|              | Position.....:   |                            | —       |
|              | Method of protection .....   |                            | —       |
| G.5.3.2      | Insulation   |                            | N/A     |
|              | Protection from displacement of windings.....:   |                            | —       |
| G.5.3.3      | Overload test .....  |                            | N/A     |
| G.5.3.3.1    | Test conditions  |                            | N/A     |
| G.5.3.3.2    | Winding Temperatures testing in the unit   |                            | N/A     |
| G.5.3.3.3    | Winding Temperatures - Alternative test method   |                            | N/A     |
| <b>G.5.4</b> | <b>Motors</b>  |                            | P       |
| G.5.4.1      | General requirements   | Approved DC fan used       | P       |
|              | Position .....   | (See appended table 4.1.2) | —       |
| G.5.4.2      | Test conditions  |                            | N/A     |



| IEC 62368-1 |   |                 |         |
|-------------|---|-----------------|---------|
| Clause      | Requirement + Test  | Result - Remark | Verdict |
| G.5.4.3     | Running overload test   |                 | N/A     |
| G.5.4.4     | Locked-rotor overload test  |                 | N/A     |
|             | Test duration (days) .....  |                 | —       |
| G.5.4.5     | Running overload test for d.c. motors in secondary circuits             |                 | N/A     |
| G.5.4.5.2   | Tested in the unit  |                 | N/A     |
|             | Electric strength test (V) .....  |                 | —       |
| G.5.4.5.3   | Tested on the Bench - Alternative test method; test time (h) .....      |                 | N/A     |
|             | Electric strength test (V) .....  |                 | —       |
| G.5.4.6     | Locked-rotor overload test for d.c. motors in secondary circuits        |                 | N/A     |
| G.5.4.6.2   | Tested in the unit  |                 | N/A     |
|             | Maximum Temperature .....   |                 | N/A     |
|             | Electric strength test (V) .....  |                 | N/A     |
| G.5.4.6.3   | Tested on the bench - Alternative test method; test time (h) .....      |                 | N/A     |
|             | Electric strength test (V) .....  |                 | N/A     |
| G.5.4.7     | Motors with capacitors  |                 | N/A     |
| G.5.4.8     | Three-phase motors  |                 | N/A     |
| G.5.4.9     | Series motors   |                 | N/A     |
|             | Operating voltage .....   |                 | —       |
| <b>G.6</b>  | <b>Wire Insulation</b>  |                 | N/A     |
| G.6.1       | General   |                 | N/A     |
| G.6.2       | Solvent-based enamel wiring insulation                                  |                 | N/A     |
| <b>G.7</b>  | <b>Mains supply cords</b>   |                 | N/A     |
| G.7.1       | General requirements  |                 | N/A     |
|             | Type.....   |                 | —       |
|             | Rated current (A) .....   |                 | —       |
|             | Cross-sectional area (mm <sup>2</sup> ), (AWG).....                     |                 | —       |
| G.7.2       | Compliance and test method  |                 | N/A     |
| G.7.3       | Cord anchorages and strain relief for non-detachable power supply cords |                 | N/A     |
| G.7.3.2     | Cord strain relief  |                 | N/A     |
| G.7.3.2.1   | Requirements  |                 | N/A     |
|             | Strain relief test force (N) .....                                      |                 | —       |
| G.7.3.2.2   | Strain relief mechanism failure   |                 | N/A     |



| IEC 62368-1 |  |                 |         |
|-------------|--|-----------------|---------|
| Clause      | Requirement + Test   | Result - Remark | Verdict |
| G.7.3.2.3   | Cord sheath or jacket position, distance (mm)..... :   |                 | —       |
| G.7.3.2.4   | Strain relief comprised of polymeric material  |                 | N/A     |
| G.7.4       | Cord Entry ..... :   |                 | N/A     |
| G.7.5       | Non-detachable cord bend protection  |                 | N/A     |
| G.7.5.1     | Requirements   |                 | N/A     |
| G.7.5.2     | Mass (g) ..... :   |                 | —       |
|             | Diameter (m) ..... :   |                 | —       |
|             | Temperature (°C) ..... :   |                 | —       |
| G.7.6       | Supply wiring space  |                 | N/A     |
| G.7.6.2     | Stranded wire  |                 | N/A     |
| G.7.6.2.1   | Test with 8 mm strand  |                 | N/A     |
| <b>G.8</b>  | <b>Varistors</b>   |                 | N/A     |
| G.8.1       | General requirements   |                 | N/A     |
| G.8.2       | Safeguard against shock  |                 | N/A     |
| G.8.3       | Safeguard against fire   |                 | N/A     |
| G.8.3.2     | Varistor overload test ..... :   |                 | N/A     |
| G.8.3.3     | Temporary overvoltage ..... :  |                 | N/A     |
| <b>G.9</b>  | <b>Integrated Circuit (IC) Current Limiters</b>  |                 | N/A     |
| G.9.1 a)    | Manufacturer defines limit at max. 5A.   |                 | N/A     |
| G.9.1 b)    | Limiters do not have manual operator or reset  |                 | N/A     |
| G.9.1 c)    | Supply source does not exceed 250 VA ..... :   |                 | —       |
| G.9.1 d)    | IC limiter output current (max. 5A) ..... :  |                 | —       |
| G.9.1 e)    | Manufacturers' defined drift ..... :   |                 | —       |
| G.9.2       | Test Program 1   |                 | N/A     |
| G.9.3       | Test Program 2   |                 | N/A     |
| G.9.4       | Test Program 3   |                 | N/A     |
| <b>G.10</b> | <b>Resistors</b>   |                 | N/A     |
| G.10.1      | General requirements   |                 | N/A     |
| G.10.2      | Resistor test  |                 | N/A     |
| G.10.3      | Test for resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable |                 | N/A     |
| G.10.3.1    | General requirements   |                 | N/A     |
| G.10.3.2    | Voltage surge test   |                 | N/A     |
| G.10.3.3    | Impulse test   |                 | N/A     |
| <b>G.11</b> | <b>Capacitor and RC units</b>  |                 | N/A     |



| IEC 62368-1 |   |                 |         |
|-------------|---|-----------------|---------|
| Clause      | Requirement + Test  | Result - Remark | Verdict |
| G.11.1      | General requirements  |                 | N/A     |
| G.11.2      | Conditioning of capacitors and RC units   |                 | N/A     |
| G.11.3      | Rules for selecting capacitors  |                 | N/A     |
| <b>G.12</b> | <b>Optocouplers</b>   |                 | N/A     |
|             | Optocouplers comply with IEC 60747-5-5:2007 Spacing or Electric Strength Test (specify option and test results) ..... |                 | N/A     |
|             | Type test voltage Vini .....  |                 | —       |
|             | Routine test voltage, Vini,b .....  |                 | —       |
| <b>G.13</b> | <b>Printed boards</b>   |                 | N/A     |
| G.13.1      | General requirements  |                 | N/A     |
| G.13.2      | Uncoated printed boards   |                 | N/A     |
| G.13.3      | Coated printed boards   |                 | N/A     |
| G.13.4      | Insulation between conductors on the same inner surface   |                 | N/A     |
|             | Compliance with cemented joint requirements (Specify construction) .....  |                 | —       |
| G.13.5      | Insulation between conductors on different surfaces   |                 | N/A     |
|             | Distance through insulation .....   |                 | N/A     |
|             | Number of insulation layers (pcs) .....   |                 | —       |
| G.13.6      | Tests on coated printed boards  |                 | N/A     |
| G.13.6.1    | Sample preparation and preliminary inspection   |                 | N/A     |
| G.13.6.2a)  | Thermal conditioning  |                 | N/A     |
| G.13.6.2b)  | Electric strength test  |                 | N/A     |
| G.13.6.2c)  | Abrasion resistance test  |                 | N/A     |
| <b>G.14</b> | <b>Coating on components terminals</b>  |                 | N/A     |
| G.14.1      | Requirements .....  |                 | N/A     |
| <b>G.15</b> | <b>Liquid filled components</b>   |                 | N/A     |
| G.15.1      | General requirements  |                 | N/A     |
| G.15.2      | Requirements  |                 | N/A     |
| G.15.3      | Compliance and test methods   |                 | N/A     |
| G.15.3.1    | Hydrostatic pressure test   |                 | N/A     |
| G.15.3.2    | Creep resistance test   |                 | N/A     |
| G.15.3.3    | Tubing and fittings compatibility test  |                 | N/A     |
| G.15.3.4    | Vibration test  |                 | N/A     |
| G.15.3.5    | Thermal cycling test  |                 | N/A     |



| IEC 62368-1 |   |                 |         |
|-------------|---|-----------------|---------|
| Clause      | Requirement + Test  | Result - Remark | Verdict |
| G.15.3.6    | Force test  |                 | N/A     |
| G.15.4      | Compliance  |                 | N/A     |
| <b>G.16</b> | <b>IC including capacitor discharge function (ICX)</b>  |                 | N/A     |
| a)          | Humidity treatment in accordance with sc5.4.8 – 120 hours   |                 | N/A     |
| b)          | Impulse test using circuit 2 with $U_c$ = to transient voltage .....  |                 | N/A     |
| C1)         | Application of ac voltage at 110% of rated voltage for 2.5 minutes  |                 | N/A     |
| C2)         | Test voltage .....  |                 | —       |
| D1)         | 10,000 cycles on and off using capacitor with smallest capacitance resistor with largest resistance specified by manufacturer |                 | N/A     |
| D2)         | Capacitance .....   |                 | —       |
| D3)         | Resistance .....  |                 | —       |
| <b>H</b>    | <b>CRITERIA FOR TELEPHONE RINGING SIGNALS</b>   |                 | N/A     |
| H.1         | General   |                 | N/A     |
| H.2         | Method A  |                 | N/A     |
| H.3         | Method B  |                 | N/A     |
| H.3.1       | Ringling signal   |                 | N/A     |
| H.3.1.1     | Frequency (Hz) .....  |                 | —       |
| H.3.1.2     | Voltage (V) .....   |                 | —       |
| H.3.1.3     | Cadence; time (s) and voltage (V) .....   |                 | —       |
| H.3.1.4     | Single fault current (mA):.....   |                 | —       |
| H.3.2       | Tripping device and monitoring voltage .....  |                 | N/A     |
| H.3.2.1     | Conditions for use of a tripping device or a monitoring voltage complied with   |                 | N/A     |
| H.3.2.2     | Tripping device   |                 | N/A     |
| H.3.2.3     | Monitoring voltage (V) .....  |                 | —       |
| <b>J</b>    | <b>INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION</b>   |                 | N/A     |
|             | General requirements  |                 | N/A     |
| <b>K</b>    | <b>SAFETY INTERLOCKS</b>  |                 | N/A     |
| K.1         | General requirements  |                 | N/A     |
| K.2         | Components of safety interlock safeguard mechanism .....  |                 | N/A     |
| K.3         | Inadvertent change of operating mode  |                 | N/A     |
| K.4         | Interlock safeguard override  |                 | N/A     |
| K.5         | Fail-safe   |                 | N/A     |



| IEC 62368-1 |   |                               |         |
|-------------|---|-------------------------------|---------|
| Clause      | Requirement + Test  | Result - Remark               | Verdict |
|             | Compliance .....  |                               | N/A     |
| K.6         | Mechanically operated safety interlocks   |                               | N/A     |
| K.6.1       | Endurance requirement   |                               | N/A     |
| K.6.2       | Compliance and Test method .....  |                               | N/A     |
| K.7         | Interlock circuit isolation   |                               | N/A     |
| K.7.1       | Separation distance for contact gaps & interlock circuit elements (type and circuit location) ..... |                               | N/A     |
| K.7.2       | Overload test, Current (A) .....  |                               | N/A     |
| K.7.3       | Endurance test  |                               | N/A     |
| K.7.4       | Electric strength test .....  |                               | N/A     |
| <b>L</b>    | <b>DISCONNECT DEVICES</b>   |                               | N/A     |
| L.1         | General requirements  |                               | N/A     |
| L.2         | Permanently connected equipment   |                               | N/A     |
| L.3         | Parts that remain energized   |                               | N/A     |
| L.4         | Single phase equipment  |                               | N/A     |
| L.5         | Three-phase equipment   |                               | N/A     |
| L.6         | Switches as disconnect devices  |                               | N/A     |
| L.7         | Plugs as disconnect devices   |                               | N/A     |
| L.8         | Multiple power sources  |                               | N/A     |
| <b>M</b>    | <b>EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS</b>                                 |                               | P       |
| M.1         | General requirements  |                               | P       |
| M.2         | Safety of batteries and their cells   |                               | P       |
| M.2.1       | Requirements  |                               | P       |
| M.2.2       | Compliance and test method (identify method) .. :   | See appended table 4.1.2      | P       |
| M.3         | Protection circuits   |                               | P       |
| M.3.1       | Requirements  |                               | P       |
| M.3.2       | Tests   | See appended table Annex M    | P       |
|             | - Overcharging of a rechargeable battery  |                               | N/A     |
|             | - Unintentional charging of a non-rechargeable battery  |                               | P       |
|             | - Reverse charging of a rechargeable battery  | See appended table Annex M    | N/A     |
|             | - Excessive discharging rate for any battery  | See appended table Annex M    | N/A     |
| M.3.3       | Compliance .....  | (See appended Tables annex M) | P       |
| M.4         | Additional safeguards for equipment containing secondary lithium battery                            |                               | P       |
| M.4.1       | General   |                               | P       |
| M.4.2       | Charging safeguards   |                               | P       |





| IEC 62368-1 |   |   |         |
|-------------|---|---|---------|
| Clause      | Requirement + Test  | Result - Remark   | Verdict |
| M.4.2.1     | Charging operating limits   |   | P       |
| M.4.2.2a)   | Charging voltage, current and temperature .....   | See appended table Annex M  | —       |
| M.4.2.2 b)  | Single faults in charging circuitry .....   | See appended table Annex M  | —       |
| M.4.3       | Fire Enclosure  |   | P       |
| M.4.4       | Endurance of equipment containing a secondary lithium battery                           |   | P       |
| M.4.4.2     | Preparation   |   | P       |
| M.4.4.3     | Drop and charge/discharge function tests  |   | P       |
|             | Drop  |   | P       |
|             | Charge  |   | P       |
|             | Discharge   |   | P       |
| M.4.4.4     | Charge-discharge cycle test   |   | P       |
| M.4.4.5     | Result of charge-discharge cycle test   |   | P       |
| M.5         | Risk of burn due to short circuit during carrying                                       |   | N/A     |
| M.5.1       | Requirement   |   | N/A     |
| M.5.2       | Compliance and Test Method (Test of P.2.3)  |   | N/A     |
| M.6         | Prevention of short circuits and protection from other effects of electric current      |   | P       |
| M.6.1       | Short circuits  |   | P       |
| M.6.1.1     | General requirements  |   | P       |
| M.6.1.2     | Test method to simulate an internal fault   | Component cell complied with IEC/EN 62133 2nd Forced internal short test. And UL 1642 approved component and complied with Impact test. | P       |
| M.6.1.3     | Compliance (Specify M.6.1.2 or alternative method) .....                                | The battery pack has the overcurrent protective device.   | P       |
| M.6.2       | Leakage current (mA) .....  |   | N/A     |
| M.7         | Risk of explosion from lead acid and NiCd batteries                                     |   | N/A     |
| M.7.1       | Ventilation preventing explosive gas concentration                                      |   | N/A     |
| M.7.2       | Compliance and test method  |   | N/A     |
| M.8         | Protection against internal ignition from external spark sources of lead acid batteries |   | N/A     |
| M.8.1       | General requirements  |   | N/A     |
| M.8.2       | Test method   |   | N/A     |
| M.8.2.1     | General requirements  |   | N/A     |
| M.8.2.2     | Estimation of hypothetical volume Vz (m <sup>3</sup> /s).....                           |   | —       |



| IEC 62368-1 |   |  |         |
|-------------|---|--|---------|
| Clause      | Requirement + Test  | Result - Remark  | Verdict |
| M.8.2.3     | Correction factors..... :   |  | —       |
| M.8.2.4     | Calculation of distance $d$ (mm) ..... :  |  | —       |
| M.9         | Preventing electrolyte spillage   |  | N/A     |
| M.9.1       | Protection from electrolyte spillage  |  | N/A     |
| M.9.2       | Tray for preventing electrolyte spillage  |  | N/A     |
| M.10        | Instructions to prevent reasonably foreseeable misuse (Determination of compliance: inspection, data review; or abnormal testing) ..... :         | Complied by inspection and data review                                   | P       |
| <b>N</b>    | <b>ELECTROCHEMICAL POTENTIALS</b>   |  | N/A     |
|             | Metal(s) used ..... :   |  | —       |
| <b>O</b>    | <b>MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES</b>   |  | P       |
|             | Figures O.1 to O.20 of this Annex applied ..... :   | Pollution degree considered  | —       |
| <b>P</b>    | <b>SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS</b>   |  | P       |
| P.1         | General requirements  |  | P       |
| P.2.2       | Safeguards against entry of foreign object  |  | N/A     |
|             | Location and Dimensions (mm) ..... :  |  | —       |
| P.2.3       | Safeguard against the consequences of entry of foreign object   |  | P       |
| P.2.3.1     | Safeguards against the entry of a foreign object  | No PIS or no bare conductive parts of ES3 or PS3 circuits in Figure P.3. | P       |
|             | Openings in transportable equipment   |  | N/A     |
|             | Transportable equipment with metalized plastic parts ..... :  |  | N/A     |
| P.2.3.2     | Openings in transportable equipment in relation to metallized parts of a barrier or enclosure (identification of supplementary safeguard) ..... : |  | N/A     |
| P.3         | Safeguards against spillage of internal liquids   |  | N/A     |
| P.3.1       | General requirements  |  | N/A     |
| P.3.2       | Determination of spillage consequences  |  | N/A     |
| P.3.3       | Spillage safeguards   |  | N/A     |
| P.3.4       | Safeguards effectiveness  |  | N/A     |
| P.4         | Metallized coatings and adhesive securing parts   |  | N/A     |
| P.4.2 a)    | Conditioning testing  |  | N/A     |
|             | $T_c$ (°C)..... :   |  | —       |
|             | $T_r$ (°C) ..... :  |  | —       |
|             | $T_a$ (°C)..... :   |  | —       |
| P.4.2 b)    | Abrasion testing ..... :  |  | N/A     |



| IEC 62368-1 |  |                                |         |
|-------------|--|--------------------------------|---------|
| Clause      | Requirement + Test   | Result - Remark                | Verdict |
| P.4.2 c)    | Mechanical strength testing .....  |                                | N/A     |
| <b>Q</b>    | <b>CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING</b>  |                                | P       |
| Q.1         | Limited power sources  |                                | P       |
| Q.1.1 a)    | Inherently limited output  |                                | N/A     |
| Q.1.1 b)    | Impedance limited output   |                                | P       |
|             | - Regulating network limited output under normal operating and simulated single fault condition                                    |                                | P       |
| Q.1.1 c)    | Overcurrent protective device limited output   |                                | N/A     |
| Q.1.1 d)    | IC current limiter complying with G.9  |                                | N/A     |
| Q.1.2       | Compliance and test method   | (See appended table Annex Q.1) | P       |
| Q.2         | Test for external circuits – paired conductor cable  |                                | N/A     |
|             | Maximum output current (A) .....   |                                | —       |
|             | Current limiting method.....   |                                | —       |
| <b>R</b>    | <b>LIMITED SHORT CIRCUIT TEST</b>  |                                | N/A     |
| R.1         | General requirements   |                                | N/A     |
| R.2         | Determination of the overcurrent protective device and circuit   |                                | N/A     |
| R.3         | Test method Supply voltage (V) and short-circuit current (A)). .....   |                                | N/A     |
| <b>S</b>    | <b>TESTS FOR RESISTANCE TO HEAT AND FIRE</b>   |                                | N/A     |
| S.1         | Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W |                                | N/A     |
|             | Samples, material .....  |                                | —       |
|             | Wall thickness (mm).....   |                                | —       |
|             | Conditioning (°C).....   |                                | —       |
|             | Test flame according to IEC 60695-11-5 with conditions as set out  |                                | N/A     |
|             | - Material not consumed completely   |                                | N/A     |
|             | - Material extinguishes within 30s   |                                | N/A     |
|             | - No burning of layer or wrapping tissue   |                                | N/A     |
| S.2         | Flammability test for fire enclosure and fire barrier integrity  |                                | N/A     |
|             | Samples, material .....  |                                | —       |
|             | Wall thickness (mm).....   |                                | —       |
|             | Conditioning (°C).....   |                                | —       |
|             | Test flame according to IEC 60695-11-5 with conditions as set out  |                                | N/A     |



| IEC 62368-1 |  |  |         |
|-------------|--|--|---------|
| Clause      | Requirement + Test   | Result - Remark  | Verdict |
|             | Test specimen does not show any additional hole  |  | N/A     |
| S.3         | Flammability test for the bottom of a fire enclosure   |  | N/A     |
|             | Samples, material .....  |  | —       |
|             | Wall thickness (mm) .....  |  | —       |
|             | Cheesecloth did not ignite   |  | N/A     |
| S.4         | Flammability classification of materials   |  | N/A     |
| S.5         | Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W |  | N/A     |
|             | Samples, material .....  |  | —       |
|             | Wall thickness (mm) .....  |  | —       |
|             | Conditioning (test condition), (°C) .....  |  | —       |
|             | Test flame according to IEC 60695-11-20 with conditions as set out   |  | N/A     |
|             | After every test specimen was not consumed completely  |  | N/A     |
|             | After fifth flame application, flame extinguished within 1 min   |  | N/A     |
| <b>T</b>    | <b>MECHANICAL STRENGTH TESTS</b>   |  | P       |
| T.1         | General requirements   |  | P       |
| T.2         | Steady force test, 10 N .....  | 10 N applied to all components other than the parts serving as an enclosure. | P       |
| T.3         | Steady force test, 30 N .....  |  | N/A     |
| T.4         | Steady force test, 100 N .....   |  | N/A     |
| T.5         | Steady force test, 250 N .....   | (See appended table T.5)   | P       |
| T.6         | Enclosure impact test  | (See appended table T.6)   | P       |
|             | Fall test  |  | P       |
|             | Swing test   |  | N/A     |
| T.7         | Drop test .....  |  | N/A     |
| T.8         | Stress relief test .....   | (See appended table T.8)   | P       |
| T.9         | Impact Test (glass)  |  | N/A     |
| T.9.1       | General requirements   |  | N/A     |
| T.9.2       | Impact test and compliance   |  | N/A     |
|             | Impact energy (J) .....  |  | —       |
|             | Height (m) .....   |  | —       |
| T.10        | Glass fragmentation test .....   |  | N/A     |



| IEC 62368-1 |   |                 |         |
|-------------|---|-----------------|---------|
| Clause      | Requirement + Test  | Result - Remark | Verdict |
| T.11        | Test for telescoping or rod antennas  |                 | N/A     |
|             | Torque value (Nm) .....:  |                 | —       |
| <b>U</b>    | <b>MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION</b> |                 | N/A     |
| U.1         | General requirements  |                 | N/A     |
| U.2         | Compliance and test method for non-intrinsically protected CRTs                                       |                 | N/A     |
| U.3         | Protective Screen.....:   |                 | N/A     |
| <b>V</b>    | <b>DETERMINATION OF ACCESSIBLE PARTS (FINGERS, PROBES AND WEDGES)</b>                                 |                 | P       |
| V.1         | Accessible parts of equipment   |                 | P       |
| V.2         | Accessible part criterion   |                 | P       |



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 4.1.2   | TABLE: List of critical components                           |                      |  |                                       |                                       | P |
|---|--|----------------------|--|---------------------------------------|---------------------------------------|---|
| Object / part No.                                   | Manufacturer/<br>trademark                                   | Type / model         | Technical data   | Standard                              | Mark(s) of<br>conformity <sup>1</sup> |   |
| Plastic Enclosure                                   | SABIC  | C6600(GG)(X)(V<br>S) | V-0, min. 1.5 mm<br>thick, 70°C  | UL 94, UL746                          | UL                                    |   |
| Switching power<br>adaptor                          | EDAC Power<br>Electronics Co.,<br>Ltd                        | EA11013M-1900        | I/P: AC 100-<br>240V, 50-60Hz,<br>2.0A, Class I,<br>Tma: 40°C.<br>O/P: 19Vdc/<br>6.31A | IEC/EN 62368-1,<br>IEC/EN 60950-1     | CB (issued<br>by SUD)                 |   |
| Switching power<br>adaptor (alternate)              | Interchangeable  | Interchangeable      | Class I, O/P:<br>19Vdc/ 6.3A,<br>Tma: 40°C.  | IEC/EN 62368-1,<br>IEC/EN 60950-1     | License<br>available<br>upon request  |   |
| Battery Pack  | Formosa<br>Electronic<br>Industries., Inc.                   | 10PB-MG10001-<br>AA  | 14.52Vdc, TYP.<br>10500mAh   | IEC 62133:2012                        | Wendell                               |   |
| DC fan for right and<br>left side<br>(two provided) | Adda Corporation   | AD5012UB-C73         | Rated 12Vdc,<br>0.3A, min. 18<br>CFM.  | EN 60950-1:<br>2006+A11+A1+A<br>12+A2 | TUV                                   |   |
| DC fan for bottom<br>side<br>(one provided)         | EVERFLOW<br>Precision<br>Electronic (Dong<br>Guan) Co., Ltd. | R123510BM            | Rated 12Vdc,<br>Max. 0.18A, 6.52<br>CFM.   | EN 60950-1:<br>2006+A11+A1+A<br>12+A2 | TUV                                   |   |
| Speaker<br>(two provided)                           | Interchangeable  | Interchangeable      | 4 ohm, 4W  | --                                    | --                                    |   |
| LED chip  | OSRAM  | LE A P1W             | Exempt   | IEC 62471:2006                        | DEKRA<br>(Test report)                |   |
| LED chip  | OSRAM  | LE B P1W             | Risk 2   | IEC 62471:2006                        | DEKRA<br>(Test report)                |   |
| LED chip  | OSRAM  | LE CG P1W            | Risk 2   | IEC 62471:2006                        | DEKRA<br>(Test report)                |   |
| PCB   | Interchangeable  | Interchangeable      | V-1 or better,<br>min. 105°C   | UL 796                                | UL                                    |   |
| Supplementary information:                          |  |                      |  |                                       |                                       |   |

|   |  |     |
|---|--|-----|
| 4.8.4,<br>4.8.5   | TABLE: Lithium coin/button cell batteries mechanical tests | N/A |
| (The following mechanical tests are conducted in the sequence noted.) |  |     |
| 4.8.4.2   | TABLE: Stress Relief test                                  | —   |



| IEC 62368-1                |  |                                    |                              |
|----------------------------|--|------------------------------------|------------------------------|
| Clause                     | Requirement + Test                     |                                    | Verdict                      |
|                            | <b>Part</b>                            | <b>Material</b>                    | <b>Oven Temperature (°C)</b> |
|                            |  |                                    |                              |
| 4.8.4.3                    | <b>TABLE: Battery replacement test</b> |                                    | —                            |
|                            | Battery part no. ....:                 |                                    | —                            |
|                            | Battery Installation/withdrawal        | Battery Installation/Removal Cycle | Comments                     |
|                            |  | 1                                  |                              |
|                            |  | 2                                  |                              |
|                            |  | 3                                  |                              |
|                            |  | 4                                  |                              |
|                            |  | 5                                  |                              |
|                            |  | 6                                  |                              |
|                            |  | 8                                  |                              |
|                            |  | 9                                  |                              |
|                            |  | 10                                 |                              |
| 4.8.4.4                    | <b>TABLE: Drop test</b>                |                                    | —                            |
|                            | Impact Area                            | Drop Distance                      | Drop No.                     |
|                            |  |                                    | 1                            |
|                            |  |                                    | 2                            |
|                            |  |                                    | 3                            |
| 4.8.4.5                    | <b>TABLE: Impact</b>                   |                                    | —                            |
|                            | Impacts per surface                    | Surface tested                     | Impact energy (Nm)           |
|                            |  |                                    |                              |
|                            |  |                                    |                              |
|                            |  |                                    |                              |
| 4.8.4.6                    | <b>TABLE: Crush test</b>               |                                    | —                            |
|                            | Test position                          | Surface tested                     | Crushing Force (N)           |
|                            |  |                                    | Duration force applied (s)   |
|                            |  |                                    |                              |
|                            |  |                                    |                              |
| Supplementary information: |  |                                    |                              |



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 4.8.5                      | TABLE: Lithium coin/button cell batteries mechanical test result |           |                            | N/A |
|----------------------------|--|-----------|----------------------------|-----|
| Test position              | Surface tested   | Force (N) | Duration force applied (s) |     |
|                            |  |           |                            |     |
|                            |  |           |                            |     |
| Supplementary information: |  |           |                            |     |

| 5.2   | Table: Classification of electrical energy sources |                                     |                      |                    |                    |          | N/A      |
|---|--|-------------------------------------|----------------------|--------------------|--------------------|----------|----------|
| 5.2.2.2 – Steady State Voltage and Current conditions |  |                                     |                      |                    |                    |          |          |
| No.   | Supply Voltage                                     | Location (e.g. circuit designation) | Test conditions      | Parameters         |                    |          | ES Class |
|   |  |                                     |                      | U<br>(Vrms or Vpk) | I<br>(Apk or Arms) | Hz       |          |
| --  | --   | --                                  | Normal               | --                 | --                 | --       | --       |
|   |  |                                     | Abnormal             | --                 | --                 | --       |          |
|   |  |                                     | Single fault – SC/OC | --                 | --                 | --       |          |
| --  | --   | --                                  | Normal               | --                 | --                 | --       | --       |
|   |  |                                     | Abnormal             | --                 | --                 | --       |          |
|   |  |                                     | Single fault – SC/OC | --                 | --                 | --       |          |
| 5.2.2.3 - Capacitance Limits                          |  |                                     |                      |                    |                    |          |          |
| No.   | Supply Voltage                                     | Location (e.g. circuit designation) | Test conditions      | Parameters         |                    | ES Class |          |
|   |  |                                     |                      | Capacitance, nF    | Upk (V)            |          |          |
| --  | --   | --                                  | --                   | --                 | --                 | --       |          |
| 5.2.2.4 - Single Pulses                               |  |                                     |                      |                    |                    |          |          |
| No.   | Supply Voltage                                     | Location (e.g. circuit designation) | Test conditions      | Parameters         |                    |          | ES Class |
|   |  |                                     |                      | Duration (ms)      | Upk (V)            | lpk (mA) |          |
| --  | --   | --                                  | Normal               | --                 | --                 | --       | --       |
|   |  |                                     | Abnormal             | --                 | --                 | --       |          |
|   |  |                                     | Single fault – SC/OC | --                 | --                 | --       |          |
| 5.2.2.5 - Repetitive Pulses                           |  |                                     |                      |                    |                    |          |          |
| No.   | Supply Voltage                                     | Location (e.g. circuit designation) | Test conditions      | Parameters         |                    |          | ES Class |
|   |  |                                     |                      | Off time (ms)      | Upk (V)            | lpk (mA) |          |
| --  | --   | --                                  | Normal               | --                 | --                 | --       | --       |





| IEC 62368-1   |                    |  |                      |                 |    |         |
|---|--------------------|--|----------------------|-----------------|----|---------|
| Clause  | Requirement + Test |  |                      | Result - Remark |    | Verdict |
|   |                    |  | Abnormal             | --              | -- | --      |
|   |                    |  | Single fault – SC/OC | --              | -- | --      |
| Test Conditions:<br>Normal –<br>Abnormal -<br>Supplementary information: SC=Short Circuit, OC=Short Circuit<br>1. (*) The circuits still complied with ES1 after all abnormal and single fault tests. See table B.3 and B.4 for measurements. |                    |  |                      |                 |    |         |

| 5.4.1.4, 6.3.2, 9.0, B.2.6                                      | TABLE: Temperature measurements     |                           |  |  |    | P                             |
|---|-------------------------------------|---------------------------|--|--|----|-------------------------------|
|   | Supply voltage (V) .....            | See below                 | See below                              | See below                              | -- | ---                           |
|   | Ambient T <sub>min</sub> (°C) ..... | --                        | --                                     | --                                     | -- | ---                           |
|   | Ambient T <sub>max</sub> (°C) ..... | --                        | --                                     | --                                     | -- | ---                           |
|   | T <sub>ma</sub> (°C) .....          | --                        | --                                     | --                                     | -- | ---                           |
| Maximum measured temperature T of part/at:                      |                                     | T (°C)                    |  |  |    | Allowed T <sub>max</sub> (°C) |
| Test condition:   |                                     | 19Vdc, with empty battery | Supplied by fully charged battery pack | Wall mount (19Vdc, with empty battery) | -- | --                            |
| L704 body (main board)  |                                     | 64.6                      | 57.1                                   | --                                     | -- | 105                           |
| PCB near U504 (main board)                                      |                                     | 82.7                      | 75.3                                   | 81.2                                   | -- | 105                           |
| C965 body (main board)  |                                     | 76.1                      | 69.9                                   | --                                     | -- | 105                           |
| F1 body (battery board)   |                                     | 62.0                      | 54.1                                   | --                                     | -- | 105                           |
| PCB near Q2 (battery board)                                     |                                     | 63.2                      | 54.5                                   | --                                     | -- | 105                           |
| PCB near U1 (battery board)                                     |                                     | 61.5                      | 53.5                                   | --                                     | -- | 105                           |
| MAIN Battery body near -  |                                     | 58.7                      | 51.7                                   | --                                     | -- | 100                           |
| SUB Battery body near -   |                                     | 58.8                      | 53.3                                   | --                                     | -- | 100                           |
| Plastics enclosure inside near left button                      |                                     | 37.7                      | 46.6                                   | --                                     | -- | 70                            |
| Ambient temperature during test (T <sub>amb</sub> )             |                                     | 25.0                      | 22.5                                   | 24.8                                   | -- | --                            |
| Max. ambient temperature (T <sub>ma</sub> )                     |                                     | 40                        | 40                                     | 40                                     | -- | --                            |
| Following parts located surface of enclosure (accessible parts) |                                     | --                        | --                                     | --                                     | -- | --                            |
| Plastics enclosure outside near left button                     |                                     | 28.3                      | 28.5                                   | 28.0                                   | -- | 77                            |
| Project Lens  |                                     | 45.2                      | 39.1                                   | 44.8                                   | -- | 77                            |
| HDMI  |                                     | 35.0                      | 31.4                                   | 34.0                                   | -- | 77                            |



| IEC 62368-1   |  |  |   |                          |                            |        |                               |                  |
|---|--|--|---|--------------------------|----------------------------|--------|-------------------------------|------------------|
| Clause  |  | Requirement + Test                                       |   |                          | Result - Remark            |        | Verdict                       |                  |
| DC jack in  |  | 35.9   | 34.9  | 34.5                     | --                         | 77     |                               |                  |
| USB type C port   |  | 35.9   | 34.9  | 34.4                     | --                         | 77     |                               |                  |
| USB port  |  | 34.5   | 34.4  | 32.6                     | --                         | 77     |                               |                  |
| Power button  |  | 32.9   | 30.7  | 31.6                     | --                         | 77     |                               |                  |
| Ambient temperature during test (Tamb)                          |  | 25.0   | 22.5  | 24.8                     | --                         | --     |                               |                  |
| Max. ambient temperature (Tma)                                  |  | 25   | 25  | 40                       | --                         | --     |                               |                  |
| Test condition:   |  | Ventilation openings blocked (19Vdc, with empty battery) | All DC fan locked (19Vdc, with empty battery) | USB port (CN1) over load | UBS type C (J902) overload | --     |                               |                  |
| L704 body (main board)  |  | 64.7   | 62.4  | --                       | --                         | 300    |                               |                  |
| PCB near U504 (main board)                                      |  | 85.7   | 67.0  | 70.3                     | 70.2                       | 300    |                               |                  |
| C965 body (main board)  |  | 75.6   | 67.4  | --                       | --                         | 300    |                               |                  |
| F1 body (battery board)   |  | 61.8   | 59.7  | --                       | --                         | 300    |                               |                  |
| PCB near Q2 (battery board)                                     |  | 63.2   | 61.0  | --                       | --                         | 300    |                               |                  |
| PCB near U1 (battery board)                                     |  | 61.4   | 56.6  | --                       | --                         | 300    |                               |                  |
| MAIN Battery body near -  |  | 58.9   | 57.3  | --                       | --                         | 300    |                               |                  |
| SUB Battery body near -   |  | 59.8   | 56.0  | --                       | --                         | 300    |                               |                  |
| Plastics enclosure inside near left button                      |  | 63.2   | 60.6  | --                       | --                         | 300    |                               |                  |
| Ambient temperature during test (Tamb)                          |  | 24.8   | 24.7  | 23.9                     | 24.0                       | --     |                               |                  |
| Max. ambient temperature (Tma)                                  |  | 40   | 40  | 40                       | 40                         | --     |                               |                  |
| Following parts located surface of enclosure (accessible parts) |  | --   | --  | --                       | --                         | --     |                               |                  |
| Plastics enclosure outside near left button                     |  | 28.2   | 28.5  | --                       | --                         | 87     |                               |                  |
| Project Lens  |  | 29.0   | 28.1  | --                       | --                         | 87     |                               |                  |
| HDMI  |  | 40.8   | 40.4  | --                       | --                         | 87     |                               |                  |
| DC jack in  |  | 34.9   | 34.2  | --                       | --                         | 87     |                               |                  |
| USB type C port   |  | 35.5   | 32.8  | --                       | 36.0                       | 87     |                               |                  |
| USB port  |  | 35.2   | 31.2  | 27.0                     | --                         | 87     |                               |                  |
| Power button  |  | 35.9   | 32.4  | --                       | --                         | 87     |                               |                  |
| Ambient temperature during test (Tamb)                          |  | 24.8   | 24.7  | 23.9                     | 24.0                       | --     |                               |                  |
| Max. ambient temperature (Tma)                                  |  | 25   | 25  | 25                       | 25                         | --     |                               |                  |
| Supplementary information:                                      |  |  |   |                          |                            |        |                               |                  |
| Temperature T of winding:                                       |  | t <sub>1</sub> (°C)                                      | R <sub>1</sub> (Ω)                            | t <sub>2</sub> (°C)      | R <sub>2</sub> (Ω)         | T (°C) | Allowed T <sub>max</sub> (°C) | Insulation class |



| IEC 62368-1  |                    |    |    |                 |    |    |         |
|--|--------------------|----|----|-----------------|----|----|---------|
| Clause   | Requirement + Test |    |    | Result - Remark |    |    | Verdict |
| --   | --                 | -- | -- | --              | -- | -- | --      |
| --   | --                 | -- | -- | --              | -- | -- | --      |
| Supplementary information:<br>Note 1: Tma should be considered as directed by applicable requirement<br>Note 2: Tma is not included in assessment of Touch Temperatures (Clause 9) |                    |    |    |                 |    |    |         |

|                            |  |                         |                  |     |
|----------------------------|--|-------------------------|------------------|-----|
| 5.4.1.10.2                 | TABLE: Vicat softening temperature of thermoplastics |                         |                  | N/A |
| Penetration (mm)..... :    |  |                         |                  | —   |
| Object/ Part No./Material  |  | Manufacturer/t rademark | T softening (°C) |     |
|                            |  |                         |                  |     |
|                            |  |                         |                  |     |
| supplementary information: |  |                         |                  |     |

|  |   |  |                       |                          |     |
|--|---|--|-----------------------|--------------------------|-----|
| 5.4.1.10.3                               | TABLE: Ball pressure test of thermoplastics |  |                       |                          | N/A |
| Allowed impression diameter (mm) ..... : |   |  |                       | ≤ 2 mm                   | —   |
| Object/Part No./Material                 | Manufacturer/trademark                      |  | Test temperature (°C) | Impression diameter (mm) |     |
|  |   |  |                       |                          |     |
|  |   |  |                       |                          |     |
| Supplementary information:               |   |  |                       |                          |     |

|  |   |              |                              |                  |                      |                               |         |
|--|---|--------------|------------------------------|------------------|----------------------|-------------------------------|---------|
| 5.4.2.2,<br>5.4.2.4 and<br>5.4.3                         | TABLE: Minimum Clearances/Creepage distance |              |                              |                  |                      |                               | N/A     |
| Clearance (cl) and creepage distance (cr) at/of/between: | Up (V)                                      | U r.m.s. (V) | Frequency (kHz) <sup>1</sup> | Required cl (mm) | cl (mm) <sup>2</sup> | Required <sup>2</sup> cr (mm) | cr (mm) |
|  |   |              |                              |                  |                      |                               |         |
|  |   |              |                              |                  |                      |                               |         |

Supplementary information:  
Note 1: Only for frequency above 30 kHz  
Note 2: See table 5.4.2.4 if this is based on electric strength test  
Note 3: Provide Material Group



| IEC 62368-1  |   |                            |                  |
|--|---|----------------------------|------------------|
| Clause   | Requirement + Test  | Result - Remark            | Verdict          |
| 5.4.2.3  | <b>TABLE: Minimum Clearances distances using required withstand voltage</b> |                            | N/A              |
|  | <b>Overvoltage Category (OV):</b>   |                            | II               |
|  | <b>Pollution Degree:</b>  |                            | 2                |
| Clearance distanced between:   |   | Required withstand voltage | Required cl (mm) |
|  |   |                            |                  |
|  |   |                            |                  |
| Supplementary information:<br>1. See appended table 5.4.2.2, 5.4.2.4 and 5.4.3 for measurements. |   |                            |                  |

|                               |  |                  |                                       |                    |
|-------------------------------|--|------------------|---------------------------------------|--------------------|
| 5.4.2.4                       | <b>TABLE: Clearances based on electric strength test</b> |                  |                                       | N/A                |
| Test voltage applied between: |  | Required cl (mm) | Test voltage (kV) peak/ r.m.s. / d.c. | Breakdown Yes / No |
|                               |  |                  |                                       |                    |
|                               |  |                  |                                       |                    |
| Supplementary information:    |  |                  |                                       |                    |

|   |  |                  |                              |          |                   |          |
|---|--|------------------|------------------------------|----------|-------------------|----------|
| 5.4.4.2,<br>5.4.4.5 c)<br>5.4.4.9   | <b>TABLE: Distance through insulation measurements</b> |                  |                              |          |                   | N/A      |
| Distance through insulation di at/of:   |  | Peak voltage (V) | Frequency (kHz) <sup>1</sup> | Material | Required DTI (mm) | DTI (mm) |
|   |  |                  |                              |          |                   |          |
| Supplementary information:<br>Note 1: Only for frequency above 30 kHz.<br>Note 2: Electric strength tests are also conducted after sub-clause 5.4.8 for all sources.<br>Note 3: Insulation Tape = Polyethylene 1 layers = 0.025mm<br>BI: Basic insulation; SI: Supplementary insulation; RI: reinforced insulation. |  |                  |                              |          |                   |          |

|   |                                       |                        |                  |                    |
|---|---------------------------------------|------------------------|------------------|--------------------|
| 5.4.9   | <b>TABLE: Electric strength tests</b> |                        |                  | N/A                |
| Test voltage applied between:   |                                       | Voltage shape (AC, DC) | Test voltage (V) | Breakdown Yes / No |
| --  |                                       | --                     | --               | --                 |
| --  |                                       | --                     | --               | --                 |
| Supplementary information:<br>Note 1: For details refer to appended table 4.1.2.<br>1. Applied d.c. voltage in one polarity for 60s and then repeated it in reverse polarity. |                                       |                        |                  |                    |



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 5.5.2.2   | TABLE: Stored discharge on capacitors |                            |                           |                                    |                   | N/A |
|---|---------------------------------------|----------------------------|---------------------------|------------------------------------|-------------------|-----|
| Supply Voltage (V), Hz  | Test Location                         | Operating Condition (N, S) | Switch position On or off | Measured Voltage (after 2 seconds) | ES Classification |     |
|   |                                       |                            |                           |                                    |                   |     |
| <p>Supplementary information:</p> <p>X-capacitors installed for testing are:</p> <p><input type="checkbox"/> bleeding resistor rating:</p> <p><input type="checkbox"/> ICX: in approved SPS.</p> <p>Notes:</p> <p>A. Test Location:</p> <p>Phase to Neutral; Phase to Phase; Phase to Earth; and/or Neutral to Earth</p> <p>B. Operating condition abbreviations:</p> <p>N – Normal operating condition (e.g., normal operation, or open fuse); S –Single fault condition</p> |                                       |                            |                           |                                    |                   |     |



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 5.6.6.2                    | TABLE: Resistance of protective conductors and terminations |                  |                |                  | N/A                     |
|----------------------------|---|------------------|----------------|------------------|-------------------------|
| Accessible part            |   | Test current (A) | Duration (min) | Voltage drop (V) | Resistance ( $\Omega$ ) |
|                            |   |                  |                |                  |                         |
|                            |   |                  |                |                  |                         |
| Supplementary information: |   |                  |                |                  |                         |

|   |   |   |                    |
|---|---|---|--------------------|
| 5.7.2.2,<br>5.7.4   | TABLE: Earthed accessible conductive part |   | N/A                |
| Supply voltage .....:   |   |   | —                  |
| Location  |   | Test conditions specified in 6.1 of IEC 60990 or Fault Condition No in IEC 60990 clause 6.2.2.1 through 6.2.2.8, except for 6.2.2.7 | Touch current (mA) |
|   |   | 1   | --                 |
|   |   | 2*  | --                 |
|   |   | 3   | --                 |
|   |   | 4   | --                 |
|   |   | 5   | --                 |
|   |   | 6   | --                 |
|   |   | 8   | --                 |
| Supplementary Information:  |   |   |                    |
| Notes:  |   |   |                    |
| [1] Supply voltage is the anticipated maximum Touch Voltage   |   |   |                    |
| [2] Earthed neutral conductor [Voltage differences less than 1% or more]  |   |   |                    |
| [3] Specify method used for measurement as described in IEC 60990 sub-clause 4.3  |   |   |                    |
| [4] IEC60990, sub-clause 6.2.2.7, Fault 7 not applicable.   |   |   |                    |
| [5] (*) IEC60990, sub-clause 6.2.2.2 is not applicable if switch or disconnect device (e.g., appliance coupler) provided. |   |   |                    |



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| 6.2.2   | Table: Electrical power sources (PS) measurements for classification |                      |                     |                                   |                   | N/A |
|---|--|----------------------|---------------------|-----------------------------------|-------------------|-----|
| Source  | Description  | Measurement          | Max Power after 3 s | Max Power after 5 s <sup>*)</sup> | PS Classification |     |
| A   |  | Power (W) :          |                     |                                   |                   |     |
|   |  | V <sub>A</sub> (V) : |                     |                                   |                   |     |
|   |  | I <sub>A</sub> (A) : |                     |                                   |                   |     |
| B   |  | Power (W) :          |                     |                                   |                   |     |
|   |  | V <sub>A</sub> (V) : |                     |                                   |                   |     |
|   |  | I <sub>A</sub> (A) : |                     |                                   |                   |     |
| C   |  | Power (W) :          |                     |                                   |                   |     |
|   |  | V <sub>A</sub> (V) : |                     |                                   |                   |     |
|   |  | I <sub>A</sub> (A) : |                     |                                   |                   |     |
| D   |  | Power (W) :          |                     |                                   |                   |     |
|   |  | V <sub>A</sub> (V) : |                     |                                   |                   |     |
|   |  | I <sub>A</sub> (A) : |                     |                                   |                   |     |
| Supplementary Information:  |  |                      |                     |                                   |                   |     |
| (*) Measurement taken only when limits at 3 seconds exceed PS1 limits |  |                      |                     |                                   |                   |     |

| 6.2.3.1   | Table: Determination of Potential Ignition Sources (Arcing PIS) |  |   |                      | N/A |
|---|---|--|---|----------------------|-----|
| Location  | Open circuit voltage After 3 s (V <sub>p</sub> )                | Measured r.m.s current (I <sub>rms</sub> ) | Calculated value (V <sub>p</sub> x I <sub>rms</sub> ) | Arcing PIS? Yes / No |     |
|   |   |  |   |                      |     |
|   |   |  |   |                      |     |
|   |   |  |   |                      |     |
|   |   |  |   |                      |     |
| Supplementary information:  |   |  |   |                      |     |
| An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V <sub>p</sub> ) and normal operating condition rms current (I <sub>rms</sub> ) is greater than 15. |   |  |   |                      |     |



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| <b>6.2.3.2</b>  | <b>Table: Determination of Potential Ignition Sources (Resistive PIS)</b> |  |   |  | N/A                         |
|---|---|--|---|--|-----------------------------|
| Circuit Location (x-y)  | Operating Condition<br>(Normal / Describe<br>Single Fault)                | Measured<br>wattage or VA<br>During first 30<br>s (W / VA) | Measured<br>wattage or VA<br>After 30 s (W /<br>VA) | Protective Circuit,<br>Regulator, or PTC<br>Operated?<br>Yes / No<br>(Comment) | Resistive<br>PIS?<br>Yes/No |
|   |   |  |   |  |                             |
| <p>Supplementary Information:</p> <p>A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter.</p> <p>If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification.</p> <p>A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, <u>or</u> (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault.</p> |   |  |   |  |                             |

|  |                           |                              |     |
|--|---------------------------|------------------------------|-----|
| 8.5.5  | TABLE: High Pressure Lamp |                              | N/A |
| Description                                    | Values                    | Energy Source Classification |     |
| Lamp type.....:                                |                           | —                            |     |
| Manufacturer .....                             |                           | —                            |     |
| Cat no. ....:                                  |                           | —                            |     |
| Pressure (cold) (MPa).....:                    |                           | MS_                          |     |
| Pressure (operating) (MPa) .....               |                           | MS_                          |     |
| Operating time (minutes) .....                 |                           | —                            |     |
| Explosion method .....                         |                           | —                            |     |
| Max particle length escaping enclosure (mm) .: |                           | MS_                          |     |
| Max particle length beyond 1 m (mm).....:      |                           | MS_                          |     |
| Overall result .....                           |                           |                              |     |
| Supplementary information:                     |                           |                              |     |





| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| B.2.5   | TABLE: Input test |             |       |             |         |            | P   |
|---|-------------------|-------------|-------|-------------|---------|------------|---|
| U (V)/Hz  | I (A)             | I rated (A) | P (W) | P rated (W) | Fuse No | I fuse (A) | Condition/status                              |
| 19Vdc   | 3.72              | 6.3         | 70.68 | --          | --      | --         | Maximum normal load (With empty battery pack) |
| 14.52Vdc  | 1.71              | --          | 24.83 | --          | --      | --         | Maximum normal load. Battery discharge mode   |
| Supplementary information:<br>Equipment may be have rated current or rated power or both. Both should be measured |                   |             |       |             |         |            |   |

| B.3  | TABLE: Abnormal operating condition tests |                     |                |          |                             |          |            | P  |
|--|---|---------------------|----------------|----------|-----------------------------|----------|------------|--|
| Ambient temperature (°C) .....                                   |   |                     |                |          | 25 (if not specified)       |          |            | —  |
| Power source for EUT: Manufacturer, model/type, output rating .. |   |                     |                |          | See table 4.1.2 for details |          |            | —  |
| Component No.  | Abnormal Condition                        | Supply voltage, (V) | Test time (ms) | Fuse no. | Fuse current, (A)           | T-couple | Temp. (°C) | Observation  |
| Ventilation openings blocked (with empty battery)                | Blocked                                   | 19Vdc               | 1hr            | --       | --                          | --       | --         | Unit shutdown, no hazards, no damaged, NC, NT, ASRE. |



| IEC 62368-1 |                    |  |  |  |                 |  |  |         |
|-------------|--------------------|--|--|--|-----------------|--|--|---------|
| Clause      | Requirement + Test |  |  |  | Result - Remark |  |  | Verdict |

|                        |          |       |     |    |    |    |    |   |
|------------------------|----------|-------|-----|----|----|----|----|---|
| USB port (CN1)         | overload | 19Vdc | 1hr | -- | -- | -- | -- | Normal operation, no hazards, no damaged, NC, NT, ASRE. temperature is stabled at overload condition 2.7A |
| USB type C port (J902) | overload | 19Vdc | 1hr | -- | -- | -- | -- | Normal operation, no hazards, no damaged, NC, NT, ASRE. temperature is stabled at overload condition 4.7A |

#### Supplementary information:

Test table is provided to record abnormal and fault conditions for all applicable energy sources including Thermal burn injury. Column "Abnormal/Fault." Specify if test condition by indicating "Abnormal" then the condition for a Clause B.3 test or "Single Fault" then the condition for Clause B.4.

Results Key: NB=No indication of dielectric breakdown; NC=Cheesecloth remained intact; NT=Tissue paper remained intact; IP=Internal protection operated (list component); CD=Components damaged (list damaged components); @ = Tests were repeated 2 more times (Totally 3 times) and get the same result; I/P = Input; O/P = Output, NSF=No Ignition, TC=Touch Current measured.

ASRE: All safeguards remained effectively.

1. See appended table 5.4.1.4, 6.3.2, 9.0, B.2.6 for temperature measurements.
2. All ES measurement refer to table 5.2
3. USB port (CN2) circuit is identical to USB port (CN1), test on USB port (CN1) representative other port.
4. USB type C port (J901) circuit is identical to USB type C port (J902), test on USB type C port (J902) representative other port.

| B.4  |                 | TABLE: Fault condition tests |                |          |                             |          |            | P  |
|--|-----------------|------------------------------|----------------|----------|-----------------------------|----------|------------|--|
| Ambient temperature (°C) .....                                   |                 |                              |                |          | 25 (if not specified)       |          |            | —  |
| Power source for EUT: Manufacturer, model/type, output rating .. |                 |                              |                |          | See table 4.1.2 for details |          |            | —  |
| Component No.  | Fault Condition | Supply voltage, (V)          | Test time (ms) | Fuse no. | Fuse current, (A)           | T-couple | Temp. (°C) | Observation                                |
| All DC Fans  | Locked          | 19Vdc                        | 1hr            | --       | --                          | --       | --         | Normal operation, no damaged, NC, NT, ASRE |



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

**Supplementary information:**

Results Key: NB=No indication of dielectric breakdown; NC=Cheesecloth remained intact; NT=Tissue paper remained intact; IP=Internal protection operated (list component); CD=Components damaged (list damaged components); @ = Tests were repeated 2 more times (Totally 3 times) and get the same result; I/P = Input; O/P = Output, NSF=No Ignition, TC=Touch Current measured.

ASRE: All safeguards remained effectively.

1. See appended table 5.4.1.4, 6.3.2, 9.0, B.2.6 for temperature measurements.
2. All ES measurement refer to table 5.2.



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

|   |                            |               |                         |                        |               |               |               |                   |               |
|---|----------------------------|---------------|-------------------------|------------------------|---------------|---------------|---------------|-------------------|---------------|
| Annex M   | TABLE: Batteries           |               |                         |                        |               |               |               |                   | P             |
| The tests of Annex M are applicable only when appropriate battery data is not available |                            |               |                         |                        |               |               |               |                   | --            |
| Is it possible to install the battery in a reverse polarity position? ..... :           |                            |               |                         |                        |               |               | No            |                   | --            |
|   | Non-rechargeable batteries |               |                         | Rechargeable batteries |               |               |               |                   |               |
|   | Discharging                |               | Un-intentional charging | Charging               |               | Discharging   |               | Reversed charging |               |
|   | Meas. current              | Manuf. Specs. |                         | Meas. current          | Manuf. Specs. | Meas. current | Manuf. Specs. | Meas. current     | Manuf. Specs. |
| Max. current during normal condition  | --                         | --            | --                      | 2.95A                  | 4.85A         | 1.71A         | 12A           | --                | --            |
| Max. current during fault condition<br>(Q2 pin 5 to R1 Sc)(battery pack only)           | --                         | --            | --                      | 0.15A                  | 4.85A         | --            | --            | --                | --            |
| Max. current during fault condition<br>(Q3 pin 5 to R3 Sc)<br>(battery pack only)       | --                         | --            | --                      | --                     | --            | 12A           | 12A           | --                | --            |
|   |                            |               |                         |                        |               |               |               |                   |               |
| Test results:   |                            |               |                         |                        |               |               |               | Verdict           |               |
| - Chemical leaks  |                            |               |                         |                        |               | No            |               | P                 |               |
| - Explosion of the battery  |                            |               |                         |                        |               | No            |               | P                 |               |
| - Emission of flame or expulsion of molten metal  |                            |               |                         |                        |               | No            |               | P                 |               |
| - Electric strength tests of equipment after completion of tests                        |                            |               |                         |                        |               | N/A           |               | N/A               |               |
| Supplementary information:  |                            |               |                         |                        |               |               |               |                   |               |



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| <b>Annex M.4</b>  |   | <b>Table: Additional safeguards for equipment containing secondary lithium batteries</b> |  |  | <b>P</b>   |
|---|---|--|--|--|--|
| Battery/Cell No.  | Test conditions   | Measurements   |  |  | Observation  |
|   |   | U  | I (A)  | Temp (C)   |  |
| See table 4.1.2 for details   | Normal  | Charging in EUT 19V  | Charging in EUT 4.875 A                                | --   | The pack's voltage and current when charging: 14.5Vdc (Cell: 4.2Vdc) / 2.95A |
|   | Abnormal  | Charging in EUT 19V  | Charging in EUT 4.875 A                                | --   | The pack's voltage and current when charging: 14.5Vdc (Cell: 4.2Vdc) / 2.95A |
|   | Single fault –SC/OC<br>Simulated over voltage condition, due to single fault in system, imposing on Pack (OVP: $\geq 17.5\text{Vdc}$ (Cell: 4.45Vdc)) | Set 17.12Vdc   | Set 4.875A   | --   | The pack's voltage when the protection operated: 4.28Vdc (Cell)              |
|   | Single fault –SC/OC<br>Simulated over current condition, due to single fault in system, imposing on Pack (OCP: $\geq 6.4\text{A}$ )                   | Set 14.52Vdc   | Set 5.4A   | --   | The pack's current when the protection operated: 5A                          |
| Supplementary Information:  |   |  |  |  |  |
| Battery identification  | Charging at $T_{\text{lowest}}$ (°C)  | Observation  | Charging at $T_{\text{highest}}$ (°C)                  | Observation  |  |
| See table 4.1.2 for details   | Charging in EUT chamber temp.: form 10°C, drop to 0°C   | Battery pack temperature at 0°C, protection operated.                                    | Charging in EUT chamber temp.: form 40°C, Rise to 45°C | Battery pack temperature at 43.0°C, protection operated. |  |
| Supplementary Information:  |   |  |  |  |  |
| Note: The charging / discharging specification are listed as below: |   |  |  |  |  |
| - Highest specified charging temperature: 45±3°C                    |   |  |  |  |  |
| - Lowest specified charging temperature: 0±3°C                      |   |  |  |  |  |
| - Test result is considered after M.4.4.3.                          |   |  |  |  |  |



| IEC 62368-1 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

| Annex Q.1   | TABLE: Circuits intended for interconnection with building wiring (LPS) |                     |                     |       |        | P     |
|---|---|---------------------|---------------------|-------|--------|-------|
| Note: Measured UOC (V) with all load circuits disconnected: see below |   |                     |                     |       |        |       |
| Output Circuit  | Components  | U <sub>oc</sub> (V) | I <sub>sc</sub> (A) |       | S (VA) |       |
|   |   |                     | Meas.               | Limit | Meas.  | Limit |
| All USB port, pin 1   | --  | 5.02                | 2.9                 | 8     | 9.11   | 100   |
| All USB port, pin 1   | U6 pin 6-1 SC   | 0                   | 0                   | 8     | 0      | 100   |
| All USB port, other pin   | --  | 0                   | 0                   | 8     | 0      | 100   |
| All USB type C port, pin 1  | --  | 5.28                | 4.9                 | 8     | 21.65  | 100   |
| All USB type C port, pin 1  | U925 pin 30-21 SC   | 5.28                | 4.9                 | 8     | 22.19  | 100   |
| All USB type C port, other pin  | --  | 0                   | 0                   | 8     | 0      | 100   |
| HDMI port, all pin  | --  | 0                   | 0                   | 8     | 0      | 100   |
| Ear out port, all pin   | --  | 0                   | 0                   | 8     | 0      | 100   |
| Trigger out port, all pin   | --  | 0                   | 0                   | 8     | 0      | 100   |
| Supplementary Information:<br>SC=Short circuit, OC=Open circuit       |   |                     |                     |       |        |       |

|                       |                             |                             |              |                        |  |   |
|-----------------------|-----------------------------|-----------------------------|--------------|------------------------|--|---|
| T.2, T.3,<br>T.4, T.5 | TABLE: Steady force test    |                             |              |                        |  | P |
| Part/Location         | Material                    | Thickness<br>(mm)           | Force<br>(N) | Test Duration<br>(sec) | Observation  |   |
| Enclosure/Top         | See appended<br>table 4.1.2 | See appended<br>table 4.1.2 | 250          | 5                      | ES 3 energy sources<br>did not become<br>accessible. |   |



| IEC 62368-1                |                          |                          |     |                 |  |
|----------------------------|--------------------------|--------------------------|-----|-----------------|--|
| Clause                     | Requirement + Test       |                          |     | Result - Remark | Verdict  |
| Enclosure/Rear             | See appended table 4.1.2 | See appended table 4.1.2 | 250 | 5               | ES 3 energy sources did not become accessible. |
| Enclosure/Side             | See appended table 4.1.2 | See appended table 4.1.2 | 250 | 5               | ES 3 energy sources did not become accessible. |
| Internal components        | --                       | --                       | 10  | 5               | No displacement                                |
| Supplementary information: |                          |                          |     |                 |  |

| T.6, T.9                   | TABLE: Impact tests      |                          |                        |  | P |
|----------------------------|--------------------------|--------------------------|------------------------|--|---|
| Part/Location              | Material                 | Thickness (mm)           | Vertical distance (mm) | Observation                                    |   |
| Enclosure/Top              | See appended table 4.1.2 | See appended table 4.1.2 | 1300                   | ES 3 energy sources did not become accessible. |   |
| Enclosure/Rear             | See appended table 4.1.2 | See appended table 4.1.2 | 1300                   | ES 3 energy sources did not become accessible. |   |
| Enclosure/Side             | See appended table 4.1.2 | See appended table 4.1.2 | 1300                   | ES 3 energy sources did not become accessible. |   |
| Supplementary information: |                          |                          |                        |  |   |

|                            |                   |                |                  |             |     |
|----------------------------|-------------------|----------------|------------------|-------------|-----|
| T.7                        | TABLE: Drop tests |                |                  |             | N/A |
| Part/Location              | Material          | Thickness (mm) | Drop Height (mm) | Observation |     |
|                            |                   |                |                  |             |     |
| Supplementary information: |                   |                |                  |             |     |

| T.8   | TABLE: Stress relief test |                          |                       |              |             | P |
|---|---------------------------|--------------------------|-----------------------|--------------|-------------|---|
| Part/Location   | Material                  | Thickness (mm)           | Oven Temperature (°C) | Duration (h) | Observation |   |
| Enclosure   | See appended table 4.1.2  | See appended table 4.1.2 | 70                    | 7            | 1)          |   |
| Supplementary information:  |                           |                          |                       |              |             |   |
| 1) No cracking, class 3 energy sources did not become accessible and all safeguards remain effective. |                           |                          |                       |              |             |   |



## Attachment to Test Report

**List of Attachments:**

National Differences  
Photo Documentation





## IEC62368 - ATTACHMENT

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

|   |  |  |  |
|---|--|--|--|
| <p align="center">ATTACHMENT TO TEST REPORT IEC 62368-1<br/>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES<br/>(Audio/video, information and communication technology equipment Part 1: Safety requirements)</p> |  |  |  |
| <b>Differences according to</b> .....: EN 62368-1:2014  |  |  |  |
| <b>Attachment Form No.</b> ....: EU_GD_IEC62368_1B  |  |  |  |
| <b>Attachment Originator</b> .....: Intertek Semko AB   |  |  |  |
| <b>Master Attachment</b> .....: Date (2015-08)  |  |  |  |
| <b>Copyright © 2015 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE)</b>   |  |  |  |

|             | CENELEC COMMON MODIFICATIONS (EN)  |  | P   |
|-------------|--|--|-----|
| 1           | NOTE Z1  |  | P   |
| 4.Z1        | Protective devices included as integral parts of the equipment or as parts of the building installation: |  | P   |
|             | a) Included as parts of the equipment  |  | P   |
|             | b) For components in series with the mains; by devices in the building installation                      |  | N/A |
|             | c) For pluggable type B or permanently connected; by devices in the building installation                |  | N/A |
| 5.4.2.3.2.4 | Interconnection with external circuit  |  | N/A |
| 10.2.1      | Additional requirements in 10.5.1  |  | N/A |
| 10.5.1      | RS1 compliance measurement conditions  |  | N/A |
| 10.6.2.1    | EN 71-1:2011, 4.20 and methods and distances   |  | N/A |
| 10.Z1       | Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz                                  |  | N/A |
| G.7.1       | NOTE Z1  |  | N/A |

| ZB                   | ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)  |  | P   |
|----------------------|---|--|-----|
| 4.1.15               | <b>Denmark, Finland, Norway and Sweden:</b><br>Class I pluggable equipment type A marking |  | N/A |
| 4.7.3                | <b>United Kingdom:</b><br>Torque test socket-outlet BS 1363, and the plug part BS 1363.   |  | N/A |
| 5.2.2.2              | <b>Denmark:</b><br>Warning for high touchcurrent  |  | N/A |
| 5.4.11.1 and Annex G | <b>Finland and Sweden:</b><br>Separation of the telecommunication network from earth      |  | N/A |
| 5.5.2.1              | <b>Norway:</b><br>Capacitors rated for the applicable line-to-line voltage (230 V).       |  | N/A |



## IEC62368 - ATTACHMENT

| Clause        | Requirement + Test  | Result - Remark | Verdict |
|---------------|---|-----------------|---------|
| 5.5.6         | <b>Finland, Norway and Sweden:</b><br>Resistors used as basic safeguard or bridging basic insulation comply with G.10.1 and G.10.2.   |                 | N/A     |
| 5.6.1         | <b>Denmark:</b><br>Protection for pluggable equipment type A; integral part of the equipment  |                 | P       |
| 5.6.4.2.1     | <b>Ireland and United Kingdom:</b><br>The protective current rating is taken to be 13 A   |                 | N/A     |
| 5.6.5.1       | <b>Ireland and United Kingdom:</b><br>Conductor sizes of flexible cords to be accepted by terminals for equipment rated 10 A to 13 A  |                 | N/A     |
| 5.7.5         | <b>Denmark:</b><br>The installation instruction affixed to the equipment if high protective conductor current   |                 | N/A     |
| 5.7.6.1       | <b>Norway and Sweden:</b><br>Television distribution system isolation text in user manual   |                 | N/A     |
| 5.7.6.2       | <b>Denmark:</b><br>Warning for high touch current   |                 | N/A     |
| B.3.1 and B.4 | <b>Ireland and United Kingdom:</b><br>Tests conducted using an external miniature circuit breaker or protective devices included as an integral part of the direct plug-in equipment                  |                 | N/A     |
| G.4.2         | <b>Denmark:</b><br>Appliances rated $\leq 13$ A provided with a plug according to DS 60884-2-D1:2011.   |                 | P       |
|               | Class I equipment provided with socket-outlets provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.   |                 | N/A     |
|               | If a single-phase equipment having rated $>13$ A or poly-phase equipment provided with a supply cord with a plug, plug in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2. |                 | N/A     |
|               | Mains socket outlets intended for providing power to Class II apparatus rated 2,5 A in accordance with DS 60884-2-D1:2011 standard sheet DKA 1-4a.  |                 | N/A     |
|               | Other current rating socket outlets in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.   |                 | N/A     |
|               | Mains socket-outlets with earth in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a   |                 | N/A     |
| G.4.2         | <b>United Kingdom:</b><br>The plug part of direct plug-in equipment assessed to BS 1363   |                 | N/A     |



## IEC62368 - ATTACHMENT

| Clause | Requirement + Test   | Result - Remark | Verdict |
|--------|--|-----------------|---------|
| G.7.1  | <b>United Kingdom:</b><br>Equipment fitted with a 'standard plug' in accordance with the Plugs and Sockets etc (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768 |                 | N/A     |
| G.7.1  | <b>Ireland:</b><br>Apparatus provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use                    |                 | N/A     |
| G.7.2  | <b>Ireland and United Kingdom:</b><br>A power supply cord for equipment which is rated over 10 A and up to and including 13 A.   |                 | N/A     |

|           |  |  |          |
|-----------|--|--|----------|
| <b>ZC</b> | <b>ANNEX ZC, NATIONAL DEVIATIONS (EN)</b>  |  | <b>P</b> |
| 10.5.2    | <b>Germany:</b><br>Cathode ray tube intended for the display of visual images, authorization or application of type approval and marking.                          |  | N/A      |
| F.1       | <b>Italy:</b><br>The power consumption in Watts (W) indicated on TV receiver and in instruction for use  |  | N/A      |
|           | TV receivers provided with an instruction for use, schematic diagrams and adjustments procedure in Italian language.   |  | N/A      |
|           | Marking for controls and terminals in Italian language.  |  | N/A      |
|           | Conformity declaration according to the above requirements in the instruction manual   |  | N/A      |
|           | First importers of TV receivers manufactured outside EEC previous conformity certification to the Italian Post Ministry and Certification number on the backcover. |  | N/A      |



## IEC62368 - ATTACHMENT

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

**ATTACHMENT TO TEST REPORT IEC 62368-1 2th Ed.**
**U.S.A. NATIONAL DIFFERENCES**

Audio/video, information and communication technology equipment – Part 1: Safety requirements

**Differences according to.....:** CSA/UL 62368-1:2014

**Attachment Form No.....:** US&CA\_ND\_IEC623681B

**Attachment Originator.....:** UL(US)

**Master Attachment.....:** Date 2015-06

**Copyright © 2015 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.**

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

**IEC 62368-1 - US and Canadian National Differences  
Special National Conditions based on Regulations and Other National Differences**

|        |   |  |     |
|--------|---|--|-----|
| 1.1    | All equipment is to be designed to allow installation according to the National Electrical Code (NEC), ANSI/NFPA 70, the Canadian Electrical Code (CEC), Part I, CAN/CSA C22.1, and when applicable, the National Electrical Safety Code, IEEE C2.<br><br>Also, for such equipment marked or otherwise identified, installation is allowed per the Standard for the Protection of Information Technology Equipment, ANSI/NFPA 75. |  | P   |
| 1.4    | Additional requirements apply to some forms of power distribution equipment, including sub-assemblies.  |  | N/A |
| 4.1.17 | For lengths exceeding 3.05 m, external interconnecting flexible cord and cable assemblies are required to be a suitable cable type (e.g., DP, CL2) specified in the NEC.  |  | N/A |
|        | For lengths 3.05 m or less, external interconnecting flexible cord and cable assemblies that are not types specified in the NEC generally are required to have special construction features and identification markings.   |  | P   |
| 4.8    | Lithium coin / button cell batteries have modified special construction and performance requirements.   |  | N/A |
| 5.6.3  | Protective earthing conductors comply with the minimum conductor sizes in Table G.5, except as required by Table G.7ADV.1 for cord connected equipment, or Annex DVH for permanently connected equipment  |  | N/A |



## IEC62368 - ATTACHMENT

| Clause            | Requirement + Test  | Result - Remark | Verdict |
|-------------------|---|-----------------|---------|
| 5.7.7             | Equipment intended to receive telecommunication ringing signals complies with a special touch current measurement tests.  |                 | N/A     |
| 6.5.1             | PS3 wiring outside a fire enclosure complies with single fault testing in B.4, or be current limited per one of the permitted methods.  |                 | P       |
| Annex F (F.3.3.8) | Output terminals provided for supply of other equipment, except mains, supply are marked with a maximum rating or references to which equipment it is permitted to be connected.  |                 | P       |
| Annex G (G.7.1)   | Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.  |                 | N/A     |
| Annex G (G.7.3)   | Power supply cords are required to have attachment plugs rated not less than 125 percent of the rated current of the equipment.   |                 | N/A     |
|                   | Flexible power supply cords are required to be compatible with Article 400 of the NEC, and Tables 11 and 12 of the CEC.   |                 | N/A     |
| Annex G (G.7.5)   | Minimum cord length is required to be 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement. Power supply cords are required to be no longer than 4.5 m in length if used in ITE Rooms.   |                 | N/A     |
| Annex H.2         | Continuous ringing signals under normal operating conditions up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.   |                 | N/A     |
| Annex H.4         | For circuits with other than ringing signals and with voltages exceeding 42.4 V <sub>peak</sub> or 60 V d.c., the maximum acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions. |                 | N/A     |
| Annex M           | Battery packs for stationary applications comply with special component requirements.   |                 | N/A     |
| Annex DVA (1)     | Equipment intended for use in spaces used for environmental air are subjected to special flammability requirements for heat and visible smoke release.  |                 | N/A     |
|                   | For ITE room applications, automated information storage systems with combustible media greater than 0.76 m <sup>3</sup> (27 cu ft) have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.  |                 | N/A     |



## IEC62368 - ATTACHMENT

| Clause              | Requirement + Test   | Result - Remark | Verdict |
|---------------------|--|-----------------|---------|
|                     | Consumer products designed or intended primarily for children 12 years of age or younger are subject to additional requirements in accordance with U.S. & Canadian Regulations.  |                 | N/A     |
|                     | Baby monitors additionally comply with ASTM F2951, Consumer Safety Specification for Baby Monitors.  |                 | N/A     |
| Annex DVA (5.6.3)   | For Pluggable Equipment Type A, the protection in the installation is assumed to be 20A.   |                 | P       |
| Annex DVA (6.3)     | The maximum quantity of flammable liquid stored in equipment is required to comply with NFPA 30.   |                 | N/A     |
| Annex DVA (6.4.8)   | For ITE room applications, enclosures with combustible material measuring greater than 0.9 m <sup>2</sup> (10 sq ft) or a single dimension greater than 1.8 m (6 ft) have a flame spread rating of 50 or less. For equipment with the same dimensions for other applications, an external surface that is not a fire enclosure requires a min. flammability classification of V-1. |                 | N/A     |
| Annex DVA (10.3.1)  | Equipment with lasers meets the U.S. Code of Federal Regulations 21 CFR 1040 (and the Canadian Radiation Emitting Devices Act, REDR C1370).  |                 | N/A     |
| Annex DVA (10.5.1)  | Equipment that produces ionizing radiation complies with the U.S. Code of Federal Regulations, 21 CFR 1020 (and the Canadian Radiation Emitting Devices Act, REDR C1370).  |                 | N/A     |
| Annex DVA (F.3.3.3) | Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings. Additional considerations apply for voltage ratings that exceed the attachment cap rating or are lower than the "Normal Operating Condition" in Table 2 of CAN/CSA C22.2 No. 235."               |                 | N/A     |
| Annex DVA (F.3.3.5) | Equipment identified for ITE (computer) room installation is marked with the rated current.  |                 | N/A     |
| Annex DVA (G.1)     | Vertically-mounted disconnect switches and circuit breakers have the "on" position indicated by the handle in the up position.   |                 | N/A     |
| Annex DVA (G.3.4)   | Suitable NEC/CEC branch circuit protection rated at the maximum circuit rating is required for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable.   |                 | N/A     |
| Annex DVA (G.4.2)   | Equipment with isolated ground (earthing) receptacles complies with NEC 250.146(D) and CEC 10-112 and 10-906(8).   |                 | N/A     |



## IEC62368 - ATTACHMENT

| Clause              | Requirement + Test   | Result - Remark | Verdict |
|---------------------|--|-----------------|---------|
| Annex DVA (G.5.3)   | Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, require special transformer overcurrent protection.   |                 | N/A     |
| Annex DVA (G.5.4)   | Motor control devices are required for cord-connected equipment with a mains-connected motor if the equipment is rated more than 12 A, or if the equipment has a nominal voltage rating greater than 120 V, or if the motor is rated more than 1/3 hp (locked rotor current over 43 A).  |                 | N/A     |
| Annex DVA (Annex M) | For ITE room applications, equipment with battery systems capable of supplying 750 VA for five minutes have a battery disconnect means that may be connected to the ITE room remote power-off circuit.   |                 | N/A     |
| Annex DVA (Q)       | Wiring terminals intended to supply Class 2 outputs according to the NEC or CEC Part 1 are marked with the voltage rating and "Class 2" or equivalent; marking is located adjacent to the terminals and visible during wiring.   |                 | N/A     |
| Annex DVB (1)       | Additional requirements apply for equipment used for entertainment purposes intended for installation in general patient care areas of health care facilities.   |                 | N/A     |
| Annex DVC (1)       | Additional requirements apply for equipment intended for mounting under kitchen cabinets.  |                 | N/A     |
| Annex DVE (4.1.1)   | Some equipment, components, sub-assemblies and materials associated with the risk of fire, electric shock, or personal injury have component or material ratings in accordance with the applicable national (U.S. and Canadian) component or material requirements.<br><br>Components required to comply include:<br>appliance couplers, attachment plugs, battery back-up systems, battery packs, circuit breakers, communication circuit accessories, connectors (used for current interruption of non-LPS circuits), power supply cords, direct plug-in equipment, electrochemical capacitor modules (energy storage modules with ultra-capacitors), enclosures (outdoor), flexible cords and cables, fuses (branch circuit), ground-fault current interrupters, interconnecting cables, data storage equipment, printed wiring, protectors for communications circuits, receptacles, surge protective devices, vehicle battery adapters, wire connectors, and wire and cables. |                 | P       |
| Annex DVH           | Equipment for permanent connection to the mains supply is subjected to additional requirements.  |                 | N/A     |
| Annex DVH (DVH.1)   | Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains are in accordance with the NEC/CEC.  |                 | N/A     |



## IEC62368 - ATTACHMENT

| Clause              | Requirement + Test   | Result - Remark | Verdict |
|---------------------|--|-----------------|---------|
| Annex DVH (DVH.3.2) | Terminals for permanent wiring, including protective earthing terminals, are suitable for U.S./Canadian wire gauge sizes, rated 125 percent of the equipment rating, and are specially marked when specified.  |                 | N/A     |
| Annex DVH (DVH.3.2) | Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm <sup>2</sup> ).  |                 | N/A     |
| Annex DVH (DVH.4)   | Permanently connected equipment is required to have a suitable wiring compartment and wire bending space.  |                 | N/A     |
| Annex DVH (DVH 5.5) | Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment, complies with special earthing, wiring, marking and installation instruction requirements. |                 | N/A     |
| Annex DVI (6.7)     | Equipment intended for connection to telecommunication network outside plant cable is required to be protected against overvoltage from power line crosses.  |                 | N/A     |
| Annex DVJ (10.6.1)  | Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements.   |                 | N/A     |





## IEC62368 - ATTACHMENT

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

**ATTACHMENT TO TEST REPORT IEC 62368-1****DENMARK NATIONAL DIFFERENCES**

Audio/video, information and communication technology equipment – Part 1: Safety requirements

**Differences according to**.....: DS/EN 62368-1:2014**Attachment Form No.**.....: DK\_ND\_IEC62368\_1B**Attachment Originator** .....: UL (Demko)**Master Attachment** .....: 2014-10**Copyright © 2014 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.**

|         | <b>National Differences</b>  |  |     |
|---------|--|--|-----|
| 4.1.15  | <p>To the end of the subclause the following is added:</p> <p>Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:<br/> “Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord.”</p> |  | N/A |
| 5.2.2.2 | <p>After the 2nd paragraph add the following:<br/> A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>   |  | N/A |
| 5.6.1   | <p>Add to the end of the subclause:</p> <p>Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment.</p> <p>Justification:<br/> In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.</p>  |  | N/A |
| 5.7.5   | <p>To the end of the subclause the following is added:</p> <p>The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p>   |  | N/A |



## IEC62368 - ATTACHMENT

| Clause  | Requirement + Test   | Result - Remark | Verdict |
|---------|--|-----------------|---------|
| 5.7.6.2 | To the end of the subclause the following is added:<br>The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA.  |                 | N/A     |
| G.4.2   | <p>To the end of the subclause the following is added:</p> <p>Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p>Justification:<br/>Heavy Current Regulations, Section 6c</p> |                 | N/A     |







