

CE EMC Test Report

Issued date: Oct. 14, 2019 Project No.: 19Q082903

F

Product: Ultra Short Throw Outdoor Portable LED Projector

Model: MGFU

Applicant : Elite Screens Visual & Sound Co., Ltd.

Address: 3F., No. 88, Wugong Rd., Xinzhuang Dist., New Taipei City 242, Taiwan (R.O.C.)

Report No: WD-EE-R-190581-B1

According to

 Draft ETSI EN 301489-1 V2.2.0 (2017-03)
 EN 61000-4-2: 2009

 Draft ETSI EN 301489-17 V3.2.0 (2017-03)
 EN 61000-4-3: 2006 + A1: 2008 + A2: 2010

 EN 55032: 2015 + AC: 2016, Class B
 EN 61000-4-3: 2016 + A1: 2008 + A2: 2010

 EN 61000-3-2: 2014
 EN 61000-4-4: 2012

 EN 61000-3-3: 2013
 EN 61000-4-6: 2014 + A1: 2017

 EN 61000-4-11: 2004 + A1: 2017

Authorized Signatory : _____ Robert Wang / Robert Wang



Wendell Industrial Co., Ltd Wendell Electrical Testing Lab.

Add: 6F/6F-1, No.188, Baoqiao Rd., Xindian Dist., New Taipei City 23145, Taiwan R.O.C.



Table of Contents

| 1 Cert | ification | 7 |
|----------------|--|------|
| 1.1 Su | ummary of Test Result | 8 |
| 2 Test | Configuration of Equipment Under Test | 9 |
| | est Facility | |
| | easurement Uncertainty | |
| 2.2.1 | Conducted Emission test | |
| 2.2.1 | Conducted Emission test | |
| 2.2.2 | Radiated Emission test | |
| 2.2.3 | Harmonics Current Measurement | |
| 2.2.4 | Voltage Fluctuation and Flicker Measurement | |
| 2.2.6 | Immunity Test | |
| 3 Gene | eration Information | |
| | escription of EUT | |
| | escription of Test Modes | |
| | UT Operating Condition | |
| | escription of Support Unit | |
| | onfiguration of System Under Test | |
| | | |
| | ssion Test | |
| | onducted Emission Measurement | |
| 4.1.1 | Limit of Conducted Emission Measurement | |
| 4.1.2 | Test Instrument | |
| 4.1.3 | Test Procedure. | |
| 4.1.4 4.1.5 | Deviation from Test Standard | |
| 4.1.5 | Test Setup Test Result | |
| 4.1.0 | Photographs of Test Configuration | |
| | onducted Emission at Telecommunication Ports Test | |
| | adiated Emission Measurement | |
| | | |
| 4.3.1 4.3.2 | Limits of Radiated Emission Measurement Test Instrument | |
| 4.3.2 | Test Procedure | |
| 4.3.4 | Deviation from Test Standard | |
| 4.3.4 | Test Setup | |
| 4.3.6 | Test Result | |
| 4.3.7 | Photographs of Test Configuration | |
| 4.4 Ha | armonics Current Measurement | . 37 |
| 4.4.1 | Limits of Harmonics Current Measurement | . 37 |
| 4.4.2 | Test Instrument | . 37 |
| 4.4.3 | Test Procedure | . 38 |
| 4.4.4 | Deviation from Test Standard | |
| 4.4.5 | Test Setup | |
| 4.4.6 | Test Result | |
| 4.4.7 | Photographs of Test Configuration | |
| 4.5 Vo | oltage Fluctuation and Flicker Measurement | |
| 4.5.1 | Limit for Voltage Function and Flicker Measurement | |
| 4.5.2 | Test Instrument | . 42 |

| | | (|
|-------------------------|--|----|
| | | |
| 4.5.3 | Test Procedure | |
| 4.5.4 | Deviation from Test Standard | |
| 4.5.5 | Test Setup | |
| 4.5.6 | Test Result | |
| 4.5.7 | Photographs of Test Configuration | |
| Imm | unity Test | |
| | andard Description | |
| | erformance Criteria | |
| 5.3 E | lectrostatic Discharge (ESD) | |
| 5.3.1 | Test Specification | |
| 5.3.2 | Test Instrument | |
| 5.3.3 | Test Procedure | |
| 5.3.4 | Deviation from Test Standard | |
| 5.3.5 | Test Setup | |
| 5.3.6 | Test Result | |
| 5.3.7 | Photographs of Test Configuration | |
| | adiated, Radio-frequency, Electromagnetic Field Immunity Test (RS) | |
| 5.4.1 | Test Specification | |
| 5.4.2 | Test Instrument | |
| 5.4.3 | Test Procedure | |
| 5.4.4 | Deviation from Test Standard | |
| 5.4.5 | Test Setup | |
| 5.4.6 | Test Result | |
| 5.4.7 | Photographs of Test Configuration | |
| 5.5 E | lectrical Fast Transient /Burst Immunity Test (EFT) | 6 |
| 5.5.1 | Test Specification | 6 |
| 5.5.2 | Test Instrument | 6 |
| 5.5.3 | Test Procedure | |
| 5.5.4 | Deviation from Test Standard | 6 |
| 5.5.5 | Test Setup | |
| 5.5.6 | Test Result | |
| 5.5.7 | Photographs of Test Configuration | |
| 5.6 Sı | urge Immunity Test | 70 |
| 5.6.1 | Test Specification | 7 |
| 5.6.2 | Test Instrument | |
| 5.6.3 | Test Procedure | |
| 5.6.4 | Deviation from Test Standard | |
| 5.6.5 | Test Setup | |
| 5.6.6 | Test Result | |
| 5.6.7 | Photographs of Test Configuration | |
| 5.7 C | ontinuous Conducted Disturbances (CS) | 7 |
| 5.7.1 | Test Specification | |
| 5.7.2 | Test Instrument | |
| 5.7.3 | Test Procedure | |
| 5.7.4 | Deviation from Test Standard | |
| | Test Setup | |
| 5.7.5 | 1 | |
| 5.7.5 5.7.6 5.7.7 | Test Result Photographs of Test Configuration | 70 |



| 7 | |
|----------|---|
| | Γ |
| | |

| 5.8.1 | Test Specification | . 78 |
|-------|-----------------------------------|------|
| 5.8.2 | Test Instrument | |
| | Test Procedure | . 79 |
| | Deviation from Test Standard | |
| 5.8.5 | Test Setup | . 79 |
| 5.8.6 | Test Result | . 80 |
| 5.8.7 | Photographs of Test Configuration | . 81 |



History of this test report

| Report No. | Issue date | Description |
|-------------------|---------------|---|
| WD-EE-R-190581-B0 | Oct. 05, 2019 | Initial Issue |
| WD-EE-R-190581-B1 | Oct. 14, 2019 | Changing brand name *Cancel report no.: WD-EE-R-190581-B0, Issued Date: Oct. 05, 2019 |

Declaration

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us.



History of supplementary report

| Report No. Issue date | | Description | | |
|-----------------------|---------------|-----------------|--|--|
| WD-EE-R-190581-B1 | Oct. 14, 2019 | Original report | | |

Declaration

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us.



1 Certification

| Product: | Ultra Short Throw Outdoor Portable LED Projector | |
|-------------|--|--|
| Brand Name: | MosicGO TM | |
| Model: | MGFU | |
| Applicant: | Elite Screens Visual & Sound Co., Ltd. | |
| Tested: | Sep. 05 ~ Oct. 01, 2019 | |
| Standard: | Draft ETSI EN 301489-1 V2.2.0 (2017-03) Draft ETSI EN 301489-17 V3.2.0 (2017-03) EN 55032: 2015 + AC: 2016, Class B EN 61000-3-2: 2014 EN 61000-3-3: 2013 EN 61000-4-2: 2009 EN 61000-4-2: 2009 EN 61000-4-3: 2006 + A1: 2008 + A2: 2010 EN 61000-4-4: 2012 EN 61000-4-5: 2014 + A1: 2017 EN 61000-4-6: 2014 EN 61000-4-11: 2004 + A1: 2017 | |

The above equipment (Model: MGFU) has been tested by **Wendell Electrical Testing Lab.**, and found compliance with the requirement of the above standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.



1.1 Summary of Test Result

The EUT has been tested according to the following specifications:

| Emission | | | | | | | |
|--------------------|---|--------------|------|---|--|--|--|
| Standard Test Item | | Limit Result | | Remark | | | |
| | Conducted disturbance at mains terminals | Class B | Pass | Meets the requirements | | | |
| EN 55032 | Conducted disturbance at telecommunication ports test | - | N/A | Without telecom port of the EUT | | | |
| | Radiated disturbance | Class B | Pass | Meets the requirements | | | |
| EN 61000-3-2 | Harmonic current emissions | Class A | Pass | The power consumption of EUT is less than 75W and no limits apply | | | |
| EN 61000-3-3 | Voltage fluctuations and flicker | - | Pass | Meets the requirements | | | |

| Immunity | | | | | | |
|---------------|--|---|--|--|--|--|
| Standard | Test Item | Result | Remark | | | |
| EN 61000-4-2 | Electrostatic discharges (ESD) | Pass Meets the requirements of Performance Criterion B | | | | |
| EN 61000-4-3 | Continuous radiated disturbances (RS) | Pass | Meets the requirements of Performance Criterion A | | | |
| EN 61000-4-4 | Electrical fast transients (EFT) | Pass | Meets the requirements of Performance Criterion A | | | |
| EN 61000-4-5 | | | Meets the requirements of Performance Criterion A | | | |
| EN 61000-4-6 | Continuous conducted disturbances (CS) | Pass | Meets the requirements of Performance Criterion A | | | |
| EN 61000-4-11 | Voltage dips and interruptions | Pass | Meets the requirements of Voltage Dips: ♦ 0% residual for 0.5 cycle - Performance Criterion A ♦ 0% residual for 1 cycle - Performance Criterion A ♦ 70% residual for 25 cycles - Performance Criterion A Voltage Interruptions: ♦ 0% residual for 250 cycles - Performance Criterion A | | | |

Note: Test record contained in the referenced test report relate only to the EUT sample and test item.

F



2 Test Configuration of Equipment Under Test

2.1 Test Facility

Conducted disturbance at mains terminals, Conducted disturbance at telecommunication ports, Harmonics, Flicker, ESD, EFT, Surge, CS and DIP Tests

W01: 5F-1, No.188, Baoqiao Rd., Xindian Dist., New Taipei City 23145, Taiwan (R.O.C.)

RS Test

W05: 1F-7, No.188, Baoqiao Rd., Xindian Dist., New Taipei City 23145, Taiwan (R.O.C.)

Radiated emission (9*6*6 Chamber), Conducted disturbance at mains terminals and Conducted disturbance at telecommunication ports Tests

W06: No.67-9, Shimen Rd., Tucheng Dist., New Taipei City 23654, Taiwan (R.O.C.)

ACCREDITATIONS

The laboratories are accredited and approved by the TAF according to ISO/IEC 17025.



C E



2.2 Measurement Uncertainty

The measurement instrumentation uncertainly consideration contained in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

2.2.1 Conducted Emission test

| Test Site | Measurement Freq. Range | $\mathrm{dB}\left(U_{\mathrm{cispr}} ight)$ | Note |
|-----------|-------------------------|---|------|
| W01 | 150 kHz ~ 30 MHz | 2.43 | N/A |
| W06 | 150 kHz ~ 30 MHz | 2.52 | N/A |

2.2.2 Conducted emission at telecom port test

| Test Site | Measurement Freq. Range | $\mathrm{dB}\left(U_{\mathrm{cispr}} ight)$ | Note |
|-----------|-------------------------|---|------|
| W01 | 150 kHz ~ 30 MHz | 2.45 | N/A |
| W06 | 150 kHz ~ 30 MHz | 2.40 | N/A |

2.2.3 Radiated Emission test

| Test Site | Measurement Freq. Range | Ant | $dB (U_{cispr})$ | Note |
|-----------|-------------------------|-----|------------------|------|
| | 30 MHz ~ 200 MHz | V | 3.16 | N/A |
| | 30 MHz ~ 200 MHz | Н | 2.46 | N/A |
| WIOG | 200 MHz ~ 1000 MHz | V | 4.72 | N/A |
| W06 | 200 MHz ~ 1000 MHz | Н | 3.01 | N/A |
| | 1 GHz ~ 6 GHz | V | 5.04 | N/A |
| | 1 GHz ~ 6 GHz | Н | 4.92 | N/A |

2.2.4 Harmonics Current Measurement

| Test Site | Expanded Uncertainty | | | |
|-----------|----------------------|--------|--|--|
| W01 | Voltage | 0.1 % | | |
| | Current | 0.15 % | | |




2.2.5 Voltage Fluctuation and Flicker Measurement

| Test Site | Expanded Uncertainty | | | | |
|-----------|----------------------|-----|--|--|--|
| W01 | P _{st} | 8 % | | | |

2.2.6 Immunity Test

| Test Site | Item | Expanded Unc | Expanded Uncertainty | |
|-----------|---|--------------|----------------------|-------------------|
| | Electrostatic Discharge | Voltage | 1.9% | k=2 |
| | (ESD) | Timing | 6.9% | K=2 |
| | Electrical fast transients | Voltage | 10.4% | k=2 |
| | (EFT) | Timing | 5.1% | K=2 |
| | | Voltage | 5.6% | |
| W01 | Surges | Current | 5.1% | k=2 |
| | | Time | 4.6% | |
| | Continuous conducted disturbances (CS) | CDN | 1.44dB | 150kHz ~ 230MHz, |
| | | EM Clamp | 4.09dB | k=2 |
| | Voltage dips and | Voltage | 5.2% | k=2 |
| | interruptions | Time | 4.7% | K=2 |
| W05 | Continuous radiated | 80MHz – 1GHz | 1.41dB | 20MHz 6CHz k-2 |
| W 05 | disturbances (RS) | 1GHz – 6GHz | 1.44dB | 80MHz - 6GHz, k=2 |





3 Generation Information

3.1 Description of EUT

| Product | Ultra Short Throw Outdoor Portable LED Projector | | |
|-------------------------|--|--|--|
| Brand | MosicGO TM | | |
| Model | MGFU | | |
| Applicant | Elite Screens Visual & Sound Co., Ltd. | | |
| Received date | Aug. 29, 2019 | | |
| EUT Power Rating | 19 Vdc (from adapter) | | |
| Model Differences | erences N/A | | |
| Operating System | N/A | | |
| Data Cable Supplied | N/A | | |
| Accessory Device | Adapter, remote control, HDMI cable and USB Type C cable | | |
| I/O Port | Please refer to the User's Manual | | |

Note:

1. The EUT uses the follow adapter:

| Adapter | | | |
|---------------------------------------|--|--|--|
| Brand EDAC | | | |
| Model EA11013M-1900 | | | |
| Input Power 100-240Vac, 50-60Hz, 2.0A | | | |
| Output Power | 19Vdc, 6.31A | | |
| Power line | Input: 1.8m non-shielded cable without core. Output: 1m non-shielded cable with one core. | | |

2. The EUT's highest operating frequency is more than 108MHz. Therefore the radiated emission is tested up to 6GHz.



F



3.2 Description of Test Modes

For conducted emission, the EUT has been pre-tested under the following test modes, and **test mode 2** was the worst case for final test.

| Test Mode | Test Condition | | |
|-----------|--|--|--|
| 1 | Adapter + Battery, Projector on / HDMI 1 mode, BT ON | | |
| 2 | Adapter + Battery, Projector on / USB Type C display mode, BT ON | | |

For radiated emission, the EUT has been pre-tested under the following test modes, and **test mode 2** was the worst case for final test.

| Test Mode | Test Condition | | |
|-----------|--|--|--|
| 1 | Adapter + Battery, Projector on / HDMI 1 mode, BT ON | | |
| 2 | Adapter + Battery, Projector on / USB Type C display mode, BT ON | | |
| 3 | Only Battery, Projector on / HDMI 1 mode, BT ON | | |

Test results are presented in the report as below.

| Test Result | Test Condition | | | | |
|--------------------------------------|--|--|--|--|--|
| | Conducted emission test | | | | |
| - | Adapter + Battery, Projector on / USB Type C display mode, BT ON | | | | |
| | Radiated emission 30MHz ~ 1GHz test | | | | |
| - | Adapter + Battery, Projector on / USB Type C display mode, BT ON | | | | |
| | Radiated emission above 1GHz test | | | | |
| - | Adapter + Battery, Projector on / USB Type C display mode, BT ON | | | | |
| Harmonics, Flicker and Immunity test | | | | | |
| - | Adapter + Battery, Projector on / USB Type C display mode, BT ON | | | | |

3.3 EUT Operating Condition

- a. Placed the EUT on the test table.
- b. The EUT sent voice signal to earphone.
- c. The ipod nano sent audio signal to EUT via wireless cable.
- d. The NB sent "Color Bar ITU-R.BT471-1" signal to EUT.
- e. The EUT enabled the Bluetooth function.
- f. The EUT connected to termination resistor as a dummy load.




3.4 Description of Support Unit

| Item | Equipment | Brand | Model No. | Serial No. | FCC ID | Data Cable | Power Cord | Remark |
|------|--------------------------|---------|-----------|------------|---------------------|---------------------------------------|---|--------------------|
| 1 | Notebook | DELL | XPS 13 | N/A | FCC DoC Approved | 1m shielded Type C to C cable | AC: 1m non-shielded cable DC: 1m non-shielded cable with one core | - |
| 2 | Earphone & Microphone | E-books | E-EPA057 | N/A | N/A | 1.4m non-shielded cable | N/A | - |
| 3 | Load | N/A | N/A | N/A | N/A | N/A | N/A | Supplied by client |
| 4 | Load | N/A | N/A | N/A | N/A | N/A | N/A | Supplied by client |
| 5 | Load | N/A | N/A | N/A | N/A | 0.8m shielded Type C to A cable | N/A | Supplied by client |
| 6 | iPod nano | apple | A1446 | N/A | N/A | N/A | N/A | - |
| 7 | HDMI cable *2 | AVIER | N/A | N/A | N/A | 1.5m shielded cable | N/A | - |

The EUT has been conducted testing with other necessary accessories or support units.

Note: 1. The core(s) is(are) originally attached to the cable(s).

3.5 Configuration of System Under Test

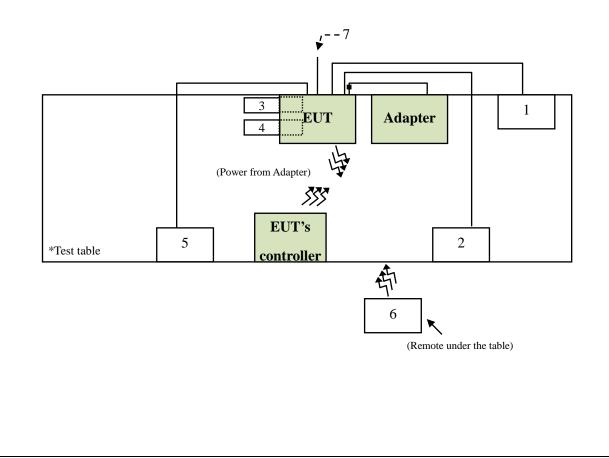





4 Emission Test

4.1 Conducted Emission Measurement

4.1.1 Limit of Conducted Emission Measurement

Class A equipment:

| Requirements for conducted emissions from the AC mains power ports of Class A equipment | | | | | | |
|--|--------------------|-----------------------------|----------------|--|--|--|
| | Me | asurement | Class A limits | | | |
| Frequency (MHz) | Coupling device | Detector type/ bandwidth | dB(uV) | | | |
| 0.15 to 0.5 | AMN | Quasi Peak / 9 kHz | 79 | | | |
| 0.5 to 30 | | | 73 | | | |
| 0.15 to 0.5 | AMN | | 66 | | | |
| 0.5 to 30 | AIVIIN | Average / 9 kHz | 60 | | | |

Class B equipment:

| Requirements for conducted emissions from the AC mains power ports of Class B equipment | | | | | |
|--|--------------------|-----------------------------|----------------|--|--|
| | Me | asurement | Class B limits | | |
| Frequency (MHz) | Coupling device | Detector type/ bandwidth | dB(uV) | | |
| 0.15 to 0.5 | | Quasi Peak / 9 kHz | 66 to 56* | | |
| 0.5 to 5 | AMN | | 56 | | |
| 5 to 30 | | | 60 | | |
| 0.15 to 0.5 | | Average / 9 kHz | 56 to 46* | | |
| 0.5 to 5 | AMN | | 46 | | |
| 5 to 30 | | | 50 | | |

* Decreases with the logarithm of the frequency.

Note: 1. The lower limit shall apply at the transition frequencies.

- 2. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
- 3. The test result calculated as following:
- Measurement Value = Reading Level + Correct Factor Correction Factor = Insertion loss of LISN + Cable loss + Transient Limiter (If use) Margin Level = Measurement Value –Limit Value



4.1.2 Test Instrument

| | Test Site: W01-CE | | | | | | | | |
|------|-------------------------|----------------------------|-----------------------|-------------|------------------------|--|--|--|--|
| Item | Equipment | Manufacturer | Model | Meter No. | Calibration Date | | | | |
| 1 | TWO-LINE V-NETWORK | R&S | ENV216 | CT-1-025-1 | Apr. 29, 2019 | | | | |
| 2 | Pulse limiter | R&S® | ESH3-Z2 | CT-2-015 | Apr. 25, 2019 | | | | |
| 3 | EMI Test Receiver | R&S | ESCI | CT-1-024 | Apr. 24, 2019 | | | | |
| 4 | V-LISN | Schwarzbeck | NSLK8127 | CT-1-104-1 | Apr. 30, 2019 | | | | |
| 5 | Test Cable | Marvelous Microwave Inc | 200200.400LL. 500A | CT-10-048-1 | Apr. 25, 2019 | | | | |
| 6 | 50ohm Termination | N/A | N/A | CT-1-065-1 | Apr. 25, 2019 | | | | |
| 7 | Measurement Software | EZ-EMC | Ver: FA-03A | CT-3-012 | No calibration request | | | | |

Note: 1. The calibration interval of the above test instruments is 12 months.

| | Test Site: W06-CE | | | | | | | |
|------|-------------------------|------------------|--------------------------|--------------|------------------------|--|--|--|
| Item | Equipment | Manufacturer | Model | Meter No. | Calibration Date | | | |
| 1 | TWO-LINE V-NETWORK | R&S | ENV216 | CT-1-025-2 | May 20, 2019 | | | |
| 2 | Transient Limiter | Electro Metrics | EM-7600 | CT-1-026 | May 16, 2019 | | | |
| 3 | EMI Test Receiver | R&S | ESR3 | CT-1-103 | May 16, 2019 | | | |
| 4 | V-LISN | Schwarzbeck | NSLK8127RC | CT-1-104-1RC | May 20, 2019 | | | |
| 5 | Test Cable | EMCI | EMCCFD300- BM-BM-5000 | CT-1-107-2 | May 16, 2019 | | | |
| 6 | 50ohm Termination | HUBER+SUHNE R | N/A | CT-1-109-1 | May 13, 2019 | | | |
| 7 | Measurement Software | EZ-EMC | Ver: FA-03A | CT-3-012 | No calibration request | | | |

Note: 1. The calibration interval of the above test instruments is 12 months.


E

4.1.3 Test Procedure

- a. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
- b. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
- c. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
- d. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- e. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
- f. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
- g. The EUT and cable configuration of the above highest emission levels were recorded. The test data of the worst case was recorded.

4.1.4 Deviation from Test Standard

No deviation

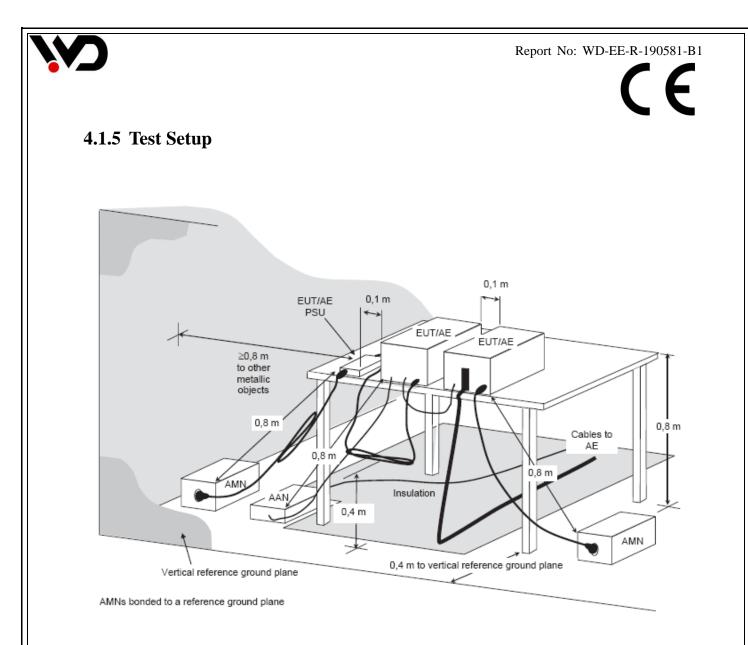

Note: Please refer to 4.1.7 for the actual test configuration.





4.1.6 Test Result

| Test Voltage | 230Vac, 50Hz | Frequency Range | 0.15-30 MHz | | | |
|-----------------------------|--------------|---------------------------|---|--|--|--|
| Environmental Conditions | 25°C, 56% RH | 6dB Bandwidth | 9 kHz | | | |
| Test Date | 2019/09/11 | Phase | L | | | |
| Tested by | Duncan Cheng | Test Site | W06 | | | |
| 80.0 dBuV | 80.0 dBuV | | | | | |
| 70 | | | | | | |
| 60 | | | 132 Class B Conduction(QP) | | | |
| 50 | | CISPR3 | 2 Class B Conduction(AVG) | | | |
| 40 | | WIT What was a way of the | | | | |
| 30 | * 1 * * * * | | Month and | | | |
| 20 | | | | | | |
| 0.0 | | | | | | |
| 0.0 | 0.5 (M | Hz) 5 | 30.000 | | | |

| No. | Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measurement (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|--------------------|-------------------------|------------------------|-----------------------|-----------------|----------------|----------|
| 1 | 0.1795 | 41.48 | 9.81 | 51.29 | 64.51 | -13.22 | QP |
| 2 | 0.1795 | 26.52 | 9.81 | 36.33 | 54.51 | -18.18 | AVG |
| 3 | 0.2586 | 38.31 | 9.81 | 48.12 | 61.48 | -13.36 | QP |
| 4 | 0.2586 | 28.60 | 9.81 | 38.41 | 51.48 | -13.07 | AVG |
| 5 | 0.4796 | 38.07 | 9.81 | 47.88 | 56.35 | -8.47 | QP |
| 6 | 0.4796 | 22.44 | 9.81 | 32.25 | 46.35 | -14.10 | AVG |
| 7 | 0.7858 | 37.78 | 9.83 | 47.61 | 56.00 | -8.39 | QP |
| 8 | 0.7858 | 22.05 | 9.83 | 31.88 | 46.00 | -14.12 | AVG |
| 9 | 0.9664 | 37.85 | 9.84 | 47.69 | 56.00 | -8.31 | QP |
| 10 | 0.9664 | 20.88 | 9.84 | 30.72 | 46.00 | -15.28 | AVG |
| 11 | 1.2145 | 37.51 | 9.85 | 47.36 | 56.00 | -8.64 | QP |
| 12 | 1.2145 | 21.13 | 9.85 | 30.98 | 46.00 | -15.02 | AVG |

 Remark:
 1. QP = Quasi Peak, AVG = Average


 2. Correction Factor = Insertion loss of LISN + Cable loss + Transient Limiter (If use)

3. Measurement Value = Reading Level + Correct Factor

4. Margin Level = Measurement Value –Limit Value



| Test Voltage | 230Vac, 50Hz | Frequency Range | 0.15-30 MHz |
|-----------------------------|--------------|------------------------|-------------|
| Environmental Conditions | 25°C, 56% RH | 6dB Bandwidth | 9 kHz |
| Test Date | 2019/09/11 | Phase | Ν |
| Tested by | Duncan Cheng | Test Site | W06 |

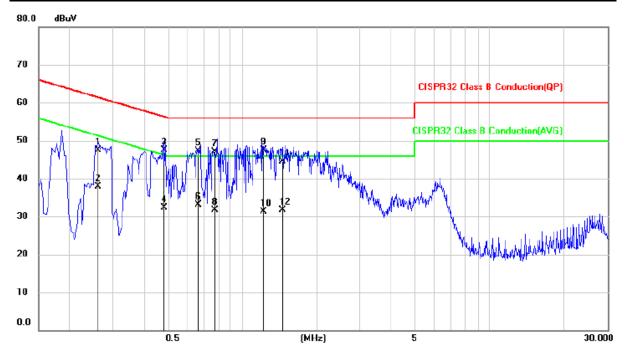

| No. | Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measurement (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|--------------------|-------------------------|------------------------|-----------------------|-----------------|----------------|----------|
| 1 | 0.2598 | 37.71 | 9.79 | 47.50 | 61.44 | -13.94 | QP |
| 2 | 0.2598 | 28.12 | 9.79 | 37.91 | 51.44 | -13.53 | AVG |
| 3 | 0.4789 | 37.72 | 9.79 | 47.51 | 56.36 | -8.85 | QP |
| 4 | 0.4789 | 22.58 | 9.79 | 32.37 | 46.36 | -13.99 | AVG |
| 5 | 0.6628 | 37.42 | 9.79 | 47.21 | 56.00 | -8.79 | QP |
| 6 | 0.6628 | 23.39 | 9.79 | 33.18 | 46.00 | -12.82 | AVG |
| 7 | 0.7807 | 37.36 | 9.81 | 47.17 | 56.00 | -8.83 | QP |
| 8 | 0.7807 | 21.97 | 9.81 | 31.78 | 46.00 | -14.22 | AVG |
| 9 | 1.2169 | 37.69 | 9.82 | 47.51 | 56.00 | -8.49 | QP |
| 10 | 1.2169 | 21.55 | 9.82 | 31.37 | 46.00 | -14.63 | AVG |
| 11 | 1.4578 | 34.62 | 9.83 | 44.45 | 56.00 | -11.55 | QP |
| 12 | 1.4578 | 21.84 | 9.83 | 31.67 | 46.00 | -14.33 | AVG |


Remark: 1. QP = Quasi Peak, AVG = Average

2. Correction Factor = Insertion loss of LISN + Cable loss + Transient Limiter (If use)

3. Measurement Value = Reading Level + Correct Factor 4. Margin Level = Measurement Value –Limit Value



| Test Voltage | 110Vac, 60Hz | Frequency Range | 0.15-30 MHz |
|-----------------------------|--------------|------------------------|-------------|
| Environmental Conditions | 25°C, 56% RH | 6dB Bandwidth | 9 kHz |
| Test Date | 2019/09/11 | Phase | L |
| Tested by | Duncan Cheng | Test Site | W06 |

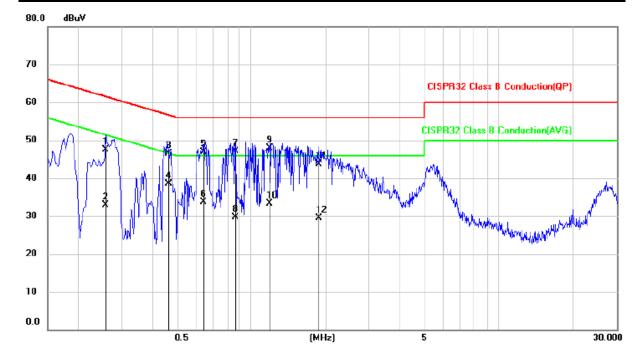


| No. | Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measurement (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|--------------------|-------------------------|------------------------|-----------------------|-----------------|----------------|----------|
| 1 | 0.2569 | 37.71 | 9.81 | 47.52 | 61.53 | -14.01 | QP |
| 2 | 0.2569 | 23.15 | 9.81 | 32.96 | 51.53 | -18.57 | AVG |
| 3 | 0.4620 | 36.78 | 9.81 | 46.59 | 56.66 | -10.07 | QP |
| 4 | 0.4620 | 28.70 | 9.81 | 38.51 | 46.66 | -8.15 | AVG |
| 5 | 0.6438 | 37.03 | 9.82 | 46.85 | 56.00 | -9.15 | QP |
| 6 | 0.6438 | 23.92 | 9.82 | 33.74 | 46.00 | -12.26 | AVG |
| 7 | 0.8581 | 37.20 | 9.84 | 47.04 | 56.00 | -8.96 | QP |
| 8 | 0.8581 | 19.84 | 9.84 | 29.68 | 46.00 | -16.32 | AVG |
| 9 | 1.1921 | 37.98 | 9.85 | 47.83 | 56.00 | -8.17 | QP |
| 10 | 1.1921 | 23.52 | 9.85 | 33.37 | 46.00 | -12.63 | AVG |
| 11 | 1.8809 | 33.85 | 9.89 | 43.74 | 56.00 | -12.26 | QP |
| 12 | 1.8809 | 19.65 | 9.89 | 29.54 | 46.00 | -16.46 | AVG |

Remark: 1. QP = Quasi Peak, AVG = Average

Quasi real, in S. Frienge C. Correction Factor = Insertion loss of LISN + Cable loss + Transient Limiter (If use)
 Measurement Value = Reading Level + Correct Factor
 Margin Level = Measurement Value –Limit Value



| Test Voltage | 110Vac, 60Hz | Frequency Range | 0.15-30 MHz |
|-----------------------------|--------------|------------------------|-------------|
| Environmental Conditions | 25°C, 56% RH | 6dB Bandwidth | 9 kHz |
| Test Date | 2019/09/11 | Phase | Ν |
| Tested by | Duncan Cheng | Test Site | W06 |

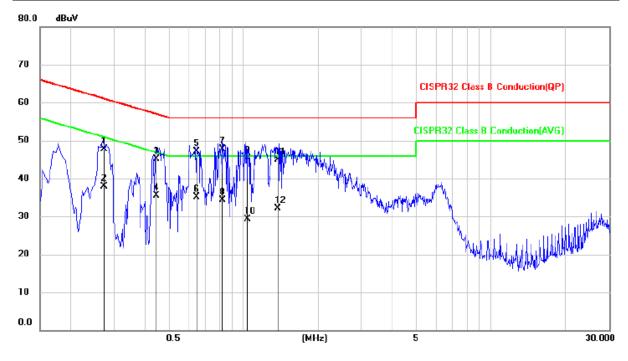

| No. | Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measurement (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|--------------------|-------------------------|------------------------|-----------------------|-----------------|----------------|----------|
| 1 | 0.2727 | 37.87 | 9.79 | 47.66 | 61.04 | -13.38 | QP |
| 2 | 0.2727 | 28.04 | 9.79 | 37.83 | 51.04 | -13.21 | AVG |
| 3 | 0.4432 | 35.29 | 9.79 | 45.08 | 57.00 | -11.92 | QP |
| 4 | 0.4432 | 25.66 | 9.79 | 35.45 | 47.00 | -11.55 | AVG |
| 5 | 0.6437 | 37.35 | 9.79 | 47.14 | 56.00 | -8.86 | QP |
| 6 | 0.6437 | 25.41 | 9.79 | 35.20 | 46.00 | -10.80 | AVG |
| 7 | 0.8264 | 37.85 | 9.81 | 47.66 | 56.00 | -8.34 | QP |
| 8 | 0.8264 | 24.52 | 9.81 | 34.33 | 46.00 | -11.67 | AVG |
| 9 | 1.0345 | 35.46 | 9.81 | 45.27 | 56.00 | -10.73 | QP |
| 10 | 1.0345 | 19.47 | 9.81 | 29.28 | 46.00 | -16.72 | AVG |
| 11 | 1.3736 | 35.13 | 9.83 | 44.96 | 56.00 | -11.04 | QP |
| 12 | 1.3736 | 22.28 | 9.83 | 32.11 | 46.00 | -13.89 | AVG |

Remark: 1. QP = Quasi Peak, AVG = Average 2. Correction Factor = Insertion loss of LISN + Cable loss + Transient Limiter (If use)


3. Measurement Value = Reading Level + Correct Factor 4. Margin Level = Measurement Value –Limit Value



CE

4.1.7 Photographs of Test Configuration



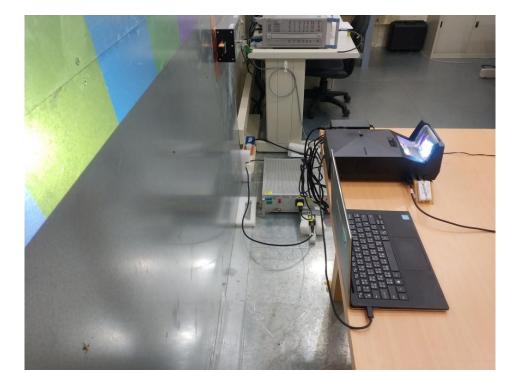



4.2 Conducted Emission at Telecommunication Ports Test

The test is determined no necessary for the EUT do not operate from the telecom lines or contain provisions for operation while connected to the telecom lines.





4.3 Radiated Emission Measurement

4.3.1 Limits of Radiated Emission Measurement

According to EN 55032 table1 - Required highest frequency for radiated measurement:

| Highest internal frequency (F _x) | Highest measured frequency |
|---|---|
| $F_x \le 108 \text{ MHz}$ | 1 GHz |
| $108 \text{ MHz} < F_x \leq 500 \text{ MHz}$ | 2 GHz |
| $500 \text{ MHz} < F_x \le 1 \text{ GHz}$ | 5 GHz |
| $F_x > 1 \text{ GHz}$ | $5 \times F_x$ up to a maximum of 6 GHz |

Remark:

1. Fx : highest fundamental frequency generated or used within the EUT or highest frequency at which it operates.

2. Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz.

Class A equipment:

| Requirements for radiated emissions at frequencies up to 1 GHz for Class A equipment | | | | |
|---|-----------------|-----------------------------|-------------------------|--|
| | Me | asurement | Class A limits dB(uV/m) | |
| Frequency (MHz) | Distance (m) | Detector type/ bandwidth | OATS/SAC | |
| 30 to 230 | 10 | Quasi Peak / 120 kHz | 40 | |
| 230 to 1000 | 10 | | 47 | |
| 30 to 230 | 3 | | 50 | |
| 230 to 1000 | J | | 57 | |

| Requirements for radiated emissions at frequencies above 1 GHz for Class A equipment | | | | |
|---|-----------------|-----------------------------|-------------------------|--|
| Measurement Class A limits dI | | | Class A limits dB(uV/m) | |
| Frequency (MHz) | Distance (m) | Detector type/ bandwidth | FSOATS | |
| 1000 to 3000 | | Average / | 56 | |
| 3000 to 6000 | 3 | 1 MHz | 60 | |
| 1000 to 3000 | 5 | Peak / 1 MHz | 76 | |
| 3000 to 6000 | | | 80 | |



Class B equipment:

| Requirements for radiated emissions at frequencies up to 1 GHz for Class B equipment | | | | | | | | |
|---|-----------------|-----------------------------|-------------------------|--|--|--|--|--|
| | Me | asurement | Class B limits dB(uV/m) | | | | | |
| Frequency (MHz) | Distance (m) | Detector type/ bandwidth | OATS/SAC | | | | | |
| 30 to 230 | 10 | Quasi Peak / | 30 | | | | | |
| 230 to 1000 | 10 | | 37 | | | | | |
| 30 to 230 | 3 | 120 kHz | 40 | | | | | |
| 230 to 1000 | J | | 47 | | | | | |

| Requirements for radiated emissions at frequencies above 1 GHz for Class B equipment | | | | | | | | |
|---|-----------------|-----------------------------|-------------------------|--|--|--|--|--|
| | Me | asurement | Class B limits dB(uV/m) | | | | | |
| Frequency (MHz) | Distance (m) | Detector type/ bandwidth | FSOATS | | | | | |
| 1000 to 3000 | | Average / | 50 | | | | | |
| 3000 to 6000 | 3 | 1 MHz | 54 | | | | | |
| 1000 to 3000 | 5 | Peak / | 70 | | | | | |
| 3000 to 6000 | | 1 MHz | 74 | | | | | |

Note: 1. The lower limit shall apply at the transition frequency.

2. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average3. The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correction Factor = Antenna factor + Cable loss (Antenna to preamplifier) - preamplifier Gain + Cable loss (preamplifier to receiver)

Margin Level = Measurement Value - Limit Value



4.3.2 Test Instrument

| | | Test S | ite: W06-966 | | |
|------|-------------------------|------------------|-----------------------|------------|---------------------------|
| Item | Equipment | Manufacturer | Model | Meter No. | Calibration Date |
| 1 | Horn Antenna | Schwarzbeck | BBHA 9120D | CT-9-031 | Oct. 09, 2018 |
| 2 | Horn Antenna | Schwarzbeck | BBHA 9170 | CT-9-032 | Oct. 11, 2018 |
| 3 | Bilog Antenna | Schwarzbeck | VULB 9168 | СТ-9-027-2 | Oct. 19, 2018 |
| 4 | EXA Signal Analyzer | Keysight | N9010A | CT-1-093 | Apr. 19, 2019 |
| 5 | EMI Test Receiver | Keysight | N9038A | CT-9-029 | Dec. 05, 2018 |
| 6 | Preamplifier | EMEC | EMC330 | CT-9-024 | Oct. 16, 2018 |
| 7 | Preamplifier | EMCI | EMC051845SE | CT-9-012 | Oct. 11, 2018 |
| 8 | Preamplifier | EMCI | EMC184045SE | CT-9-013 | Oct. 10, 2018 |
| 9 | Test Cable | EMEC | EM-CB400 | CT-9-001-1 | Oct. 18, 2018 |
| 10 | Test Cable | EMEC | EM-CB400 | CT-9-001-2 | Oct. 18, 2018 |
| 11 | Test Cable | EMEC | EM-CB400 | CT-9-001-3 | Oct. 18, 2018 |
| 12 | Test Cable | HUBER+SUHN ER | SF102 | CT-9-002-1 | Oct. 10, 2018 |
| 13 | Test Cable | EMEC | EMC102-KM-K M-600 | CT-9-020 | Oct. 10, 2018 |
| 14 | Test Cable | EMEC | EMC102-KM-K M-3000 | CT-9-021-1 | Oct. 10, 2018 |
| 15 | Measurement Software | EZ-EMC | Ver : FA-03A2 RE | CT-3-012 | No calibration request |

Note: 1. The calibration interval of the above test instruments is 12 months.

4.3.3 Test Procedure

- a. The EUT was placed on the top of a turntable 0.8 meters above the ground at a 3 m 966 chamber or 10 m open area test site. The table was rotated 360 degrees to determine the position of the high radiation emissions.
- b. The height of the test antenna shall vary between 1 m to 4 m. Both vertical and horizontal polarizations of the antenna were set to make the measurement.
- c. The EUT was set up as per the test configuration to simulate typical usage per the user's manual. All I/O cables were positioned to simulate typical usage. The actual test configuration, please refer to EUT test photos.
- d. The initial step in collecting radiated emission data is a Spectrum Mode scanning the measurement frequency range.

Below 1GHz:

Reading in which marked as QP or Peak means measurements by using Spectrum Mode with detector RBW=120kHz.

If the Spectrum Mode measured peak value compliance with and lower than Quasi Peak Limit, the EUT shall be deemed to meet QP Limits.

Above 1GHz:

Reading in which marked as Peak & AVG means measurements by using Spectrum Mode with setting in RBW=1MHz.

If the Spectrum Mode measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak and AVG Limits.

e. Emission frequency and amplitude were recorded, recording at least six highest emissions. The EUT and cable configuration of the above highest emission levels were recorded. The test data of the worst case was recorded.

4.3.4 Deviation from Test Standard


No deviation



` F


4.3.5 Test Setup

< Radiated Emissions Frequency: 30 MHz to 1000 MHz >

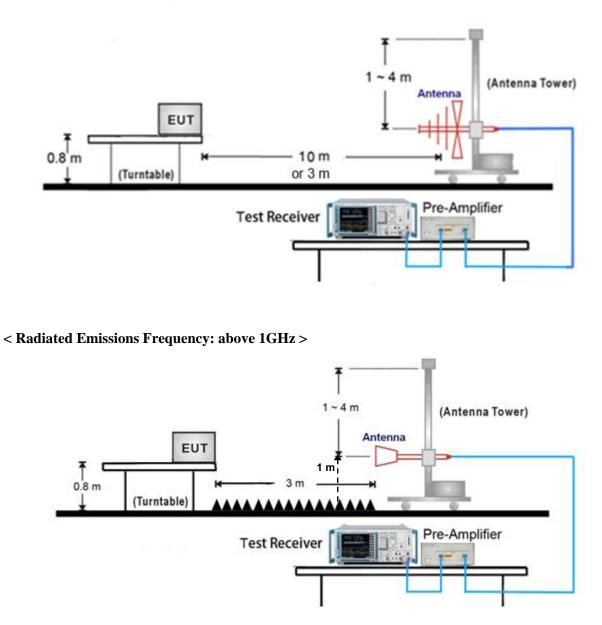

Note:

- (1) Please refer to the 4.3.7 for the actual test configuration.
- (2) The formula of measured value as: Test Result = Reading + Correction Factor
- (3) Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
- (4) The test result calculated as following: Measurement Value = Reading Level + Correct Factor
- Correct Factor = Antenna Factor + Cable Loss Amplifier Gain (if use) Margin Level = Measurement Value - Limit Value

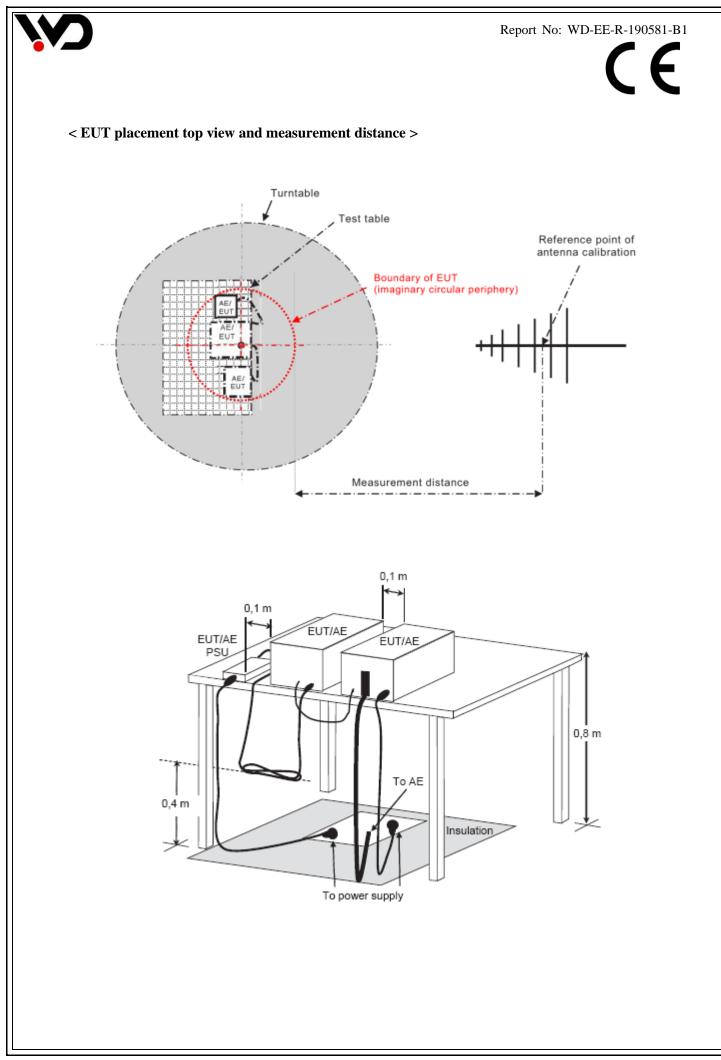






4.3.6 Test Result

| Test Voltage | 230Vac, 50Hz | Frequency Range | 30 – 1000 MHz |
|-----------------------------|--------------|------------------------|---------------|
| Environmental Conditions | 28°C, 63% RH | 6dB Bandwidth | 120 kHz |
| Test Date | 2019/09/09 | Test Distance | 3m |
| Tested by | Karwin Kao | Polarization | Vertical |
| Test Site | W06 | | |

80.0 dBuV/m

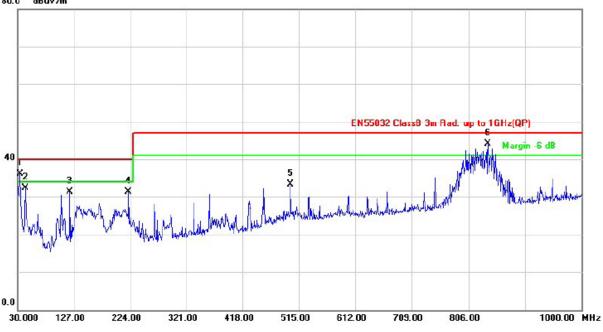

| No. | Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB/m) | Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Degree (degree) |
|-----|--------------------|----------------------------|-----------------------------|-------------------------|-------------------|----------------|----------|---------------------------|-----------------------------|
| 1 | 34.8500 | 46.53 | -10.36 | 36.17 | 40.00 | -3.83 | peak | 100 | 150 |
| 2 | 43.5799 | 41.71 | -9.49 | 32.22 | 40.00 | -7.78 | peak | 100 | 228 |
| 3 | 120.2099 | 43.61 | -12.32 | 31.29 | 40.00 | -8.71 | peak | 100 | 61 |
| 4 | 221.0900 | 43.72 | -12.32 | 31.40 | 40.00 | -8.60 | peak | 100 | 110 |
| 5 | 500.4499 | 37.65 | -4.40 | 33.25 | 47.00 | -13.75 | peak | 100 | 100 |
| 6 | 838.9800 | 42.58 | 1.43 | 44.01 | 47.00 | -2.99 | peak | 200 | 251 |

Remark: 1. QP = Quasi Peak

2. Correction Factor = Antenna factor + Cable loss (Antenna to preamplifier) - preamplifier Gain

+ Cable loss (preamplifier to receiver)


3. Measurement Value = Reading Level + Correct Factor

4. Margin Level = Measurement Value - Limit Value



| Test Voltage | 230Vac, 50Hz | Frequency Range | 30 – 1000 MHz |
|-----------------------------|--------------|------------------------|---------------|
| Environmental Conditions | 28°C, 63% RH | 6dB Bandwidth | 120 kHz |
| Test Date | 2019/09/09 | Test Distance | 3m |
| Tested by | Karwin Kao | Polarization | Horizontal |
| Test Site | W06 | | |



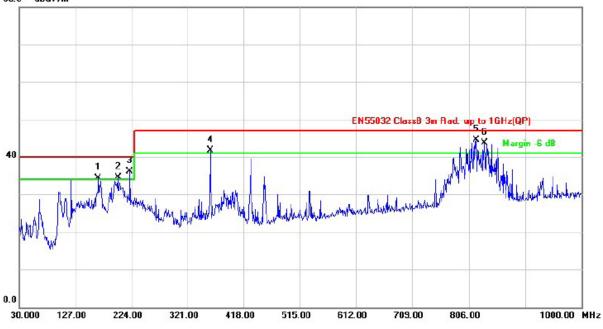

| No. | Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB/m) | Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Degree (degree) |
|-----|--------------------|----------------------------|-----------------------------|-------------------------|-------------------|----------------|----------|---------------------------|-----------------------------|
| 1 | 166.7700 | 44.21 | -9.86 | 34.35 | 40.00 | -5.65 | peak | 100 | 113 |
| 2 | 200.7200 | 47.00 | -12.52 | 34.48 | 40.00 | -5.52 | peak | 100 | 231 |
| 3 | 221.0900 | 48.46 | -12.32 | 36.14 | 40.00 | -3.86 | peak | 100 | 260 |
| 4 | 359.8000 | 49.29 | -7.63 | 41.66 | 47.00 | -5.34 | peak | 100 | 231 |
| 5 | 818.6100 | 43.39 | 1.14 | 44.53 | 47.00 | -2.47 | peak | 100 | 132 |
| 6 | 832.1900 | 42.28 | 1.35 | 43.63 | 47.00 | -3.37 | peak | 100 | 132 |

Remark: 1. QP = Quasi Peak

2. Correction Factor = Antenna factor + Cable loss (Antenna to preamplifier) - preamplifier Gain


+ Cable loss (preamplifier to receiver)

3. Measurement Value = Reading Level + Correct Factor 4. Margin Level = Measurement Value - Limit Value



| Test Voltage | 230Vac, 50Hz | Frequency Range | 1 – 6GHz |
|-----------------------------|--------------|------------------------|----------|
| Environmental Conditions | 28°C, 63% RH | 6dB Bandwidth | 1MHz |
| Test Date | 2019/09/09 | Test Distance | 3m |
| Tested by | Karwin Kao | Polarization | Vertical |
| Test Site | W06 | | |

100.0 dBuV/m

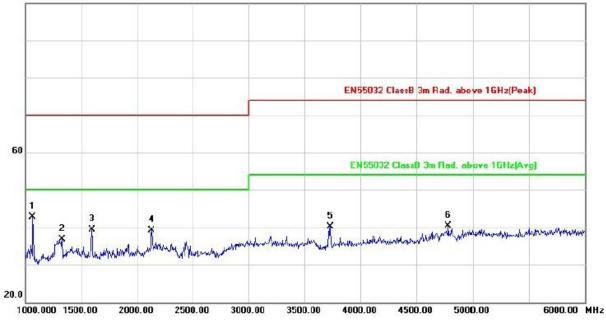

| No. | Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB/m) | Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Degree (degree) |
|-----|--------------------|----------------------------|-----------------------------|-------------------------|-------------------|----------------|----------|---------------------------|-----------------------------|
| 1 | 1065.000 | 64.66 | -21.86 | 42.80 | 70.00 | -27.20 | peak | 100 | 360 |
| 2 | 1330.000 | 55.65 | -19.03 | 36.62 | 70.00 | -33.38 | peak | 100 | 53 |
| 3 | 1595.000 | 58.99 | -19.78 | 39.21 | 70.00 | -30.79 | peak | 100 | 220 |
| 4 | 2130.000 | 55.59 | -16.49 | 39.10 | 70.00 | -30.90 | peak | 100 | 328 |
| 5 | 3730.000 | 53.01 | -12.89 | 40.12 | 74.00 | -33.88 | peak | 100 | 92 |
| 6 | 4785.000 | 50.08 | -9.83 | 40.25 | 74.00 | -33.75 | peak | 100 | 230 |

Remark: 1. peak = Peak, AVG = Average

2. Correction Factor = Antenna factor + Cable loss (Antenna to preamplifier) - preamplifier Gain


+ Cable loss (preamplifier to receiver)

- 3. Measurement Value = Reading Level + Correct Factor
- 4. Margin Level = Measurement Value Limit Value



| Test Voltage | 230Vac, 50Hz | Frequency Range | 1 – 6GHz |
|-----------------------------|--------------|------------------------|------------|
| Environmental Conditions | 28°C, 63% RH | 6dB Bandwidth | 1MHz |
| Test Date | 2019/09/09 | Test Distance | 3m |
| Tested by | Karwin Kao | Polarization | Horizontal |
| Test Site | W06 | | |

100.0 dBuV/m

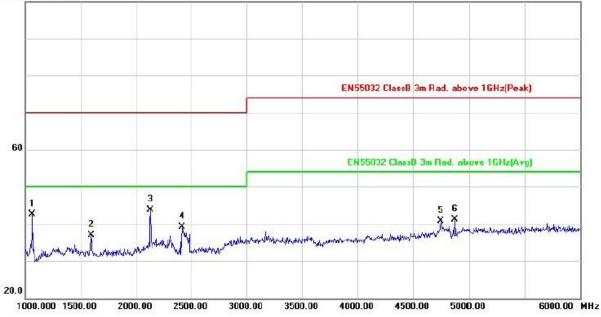


| No. | Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB/m) | Measurement (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Degree (degree) |
|-----|--------------------|----------------------------|-----------------------------|-------------------------|-------------------|----------------|----------|---------------------------|-----------------------------|
| 1 | 1065.000 | 64.36 | -21.86 | 42.50 | 70.00 | -27.50 | peak | 100 | 219 |
| 2 | 1595.000 | 56.61 | -19.78 | 36.83 | 70.00 | -33.17 | peak | 100 | 160 |
| 3 | 2130.000 | 60.25 | -16.49 | 43.76 | 70.00 | -26.24 | peak | 100 | 297 |
| 4 | 2415.000 | 55.31 | -16.22 | 39.09 | 70.00 | -30.91 | peak | 100 | 229 |
| 5 | 4750.000 | 50.55 | -9.88 | 40.67 | 74.00 | -33.33 | peak | 100 | 307 |
| 6 | 4875.000 | 51.06 | -9.95 | 41.11 | 74.00 | -32.89 | peak | 100 | 317 |

Remark: 1. peak = Peak, AVG = Average

2. Correction Factor = Antenna factor + Cable loss (Antenna to preamplifier) - preamplifier Gain

- + Cable loss (preamplifier to receiver)
 3. Measurement Value = Reading Level + Correct Factor
 4. Margin Level = Measurement Value Limit Value



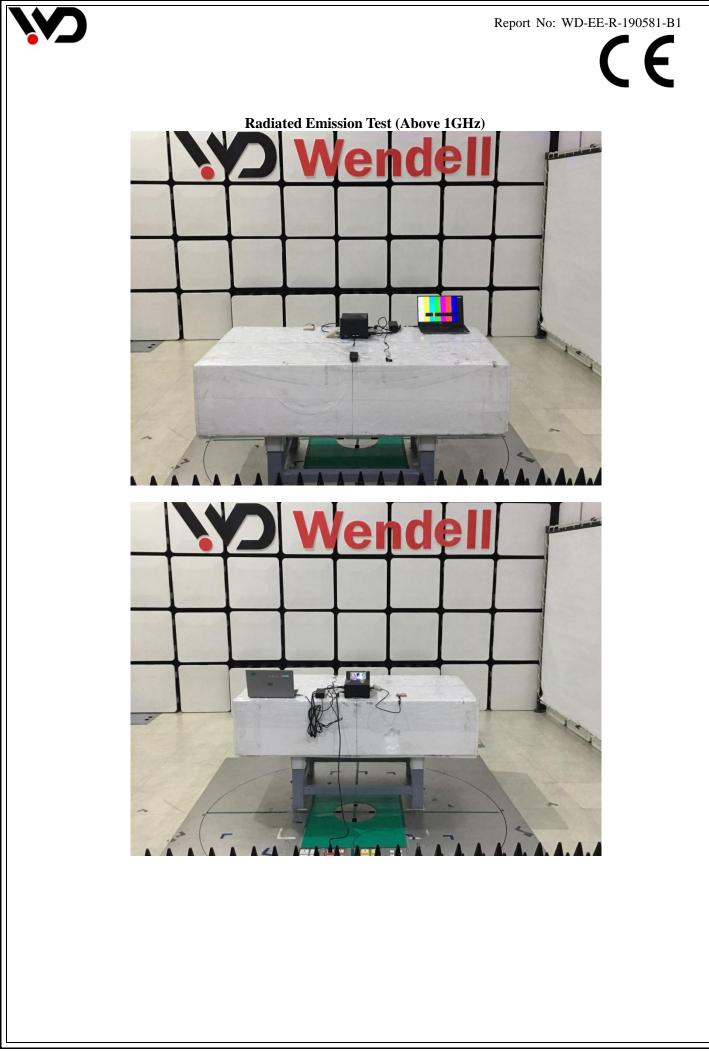





4.4 Harmonics Current Measurement

4.4.1 Limits of Harmonics Current Measurement

The limits ensure that harmonic disturbance levels do not exceed the compatibility levels defined in IEC 61000-3-2.

| Limits for | Limits for Class A equipment | | | |
|--------------------|------------------------------------|--|--|--|
| Harmonics Order | Max. permissible harmonics current | | | |
| n | А | | | |
| Ode | d harmonics | | | |
| 3 | 2.30 | | | |
| 5 | 1.14 | | | |
| 7 | 0.77 | | | |
| 9 | 0.40 | | | |
| 11 | 0.33 | | | |
| 13 | 0.21 | | | |
| 15<=n<=39 | 0.15x15/n | | | |
| Eve | n harmonics | | | |
| 2 | 1.08 | | | |
| 4 | 0.43 | | | |
| 6 | 0.30 | | | |
| 8<=n<=40 | 0.23x8/n | | | |

| | Limits for Class D equipment | | | | | |
|--------------------|------------------------------|-------------------|--|--|--|--|
| Harmonics | Max. permissible | Max. permissible | | | | |
| Order | harmonics current per watt | harmonics current | | | | |
| n | mA/W | А | | | | |
| Odd Harmonics only | | | | | | |
| 3 | 3.4 | 2.30 | | | | |
| 5 | 1.9 | 1.14 | | | | |
| 7 | 1.0 | 0.77 | | | | |
| 9 | 0.5 | 0.40 | | | | |
| 11 | 0.35 | 0.33 | | | | |
| 13 | 0.30 | 0.21 | | | | |
| 15<=n<=39 | 3.85/n | 0.15x15/n | | | | |

- **Note:** 1. Class A and Class D are classified according to item section 5 of EN 61000-3-2.
 - 2. According to section 7 of EN 61000-3-2, the above limits for all equipment except for lighting equipment having an active input power > 75 W and no limits apply for equipment with an active input power up to and including 75 W.

4.4.2 Test Instrument

| Item | Equipment | Manufacturer | Model | Meter No. | Calibration Date |
|------|------------------------------------|--------------|-------------|-------------|---------------------|
| 1 | Harmonics & Flicker Analyser | EMC PARTNER | HAR-1000-1P | CT-1-090(1) | Aug. 30, 2019 |
| 2 | Power Source | EMC PARTNER | PS3-1 | CT-1-090a1 | Aug. 30, 2019 |

Note: 1. The calibration interval of the above test instruments is 12 months.

Report No: WD-EE-R-190581-B1

F



4.4.3 Test Procedure

The EUT was placed on the top of a wooden table 0.8 meter above the ground and operated to produce the maximum harmonic under normal operating conditions for each successive harmonic component in turn.

The classification of EUT is according to section 5 of EN 61000-3-2.

The EUT classified as follows:

Class A:

- Balanced three-phase equipment;
- Household appliances excluding equipment identified as Class D;
- Tools excluding portable tools;
- Dimmers for incandescent lamps;
- Audio equipment.

Equipment not specified in one of the three other classes should be considered as Class A equipment.

Note 1: Equipment that can be shown to have a significant effect on the supply system may be reclassified in a future edition of the standard. Factors to be taken into account include:

- Number in use;
- Duration of use;
- Simultaneity of use;
- Power consumption;
- Harmonic spectrum, including phase.

Class B:

- Portable tools;
- Arc welding equipment, which is not professional equipment.

Class C:

- Lighting equipment;

Class D:

Equipment having a specified power according to 6.2.2 less than or equal to 600W, of the following types:


- Personal computers and personal computer monitors;
- Television receivers.



4.4.4 Deviation from Test Standard

No deviation

4.4.5 Test Setup

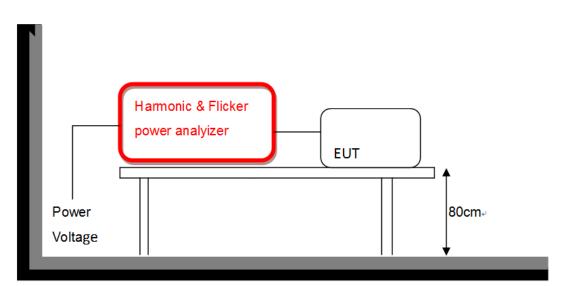





4.4.6 Test Result

| | Supply Voltage / Ampere | | 229.5 Vrm 0.489 Arm | | | Tes | t Date | | 20 | 19/09/05 | | | |
|-----|----------------------------|-----------------------|------------------------|------------------|------------------|-----|------------------|-------------------------|--------------|----------|--------------|---------------|-------------|
| | | | | | | | | ver | | | | | |
| | Tes | t Duration | n | 5 min | 5 min | | | Consumption | | 106.0W | | | |
| | Pow | ver Frequ | ency | 49.922Hz | 49.922Hz | | | Power Factor 0.9 | | 0.9 | 0.944 | | |
| | | vironment nditions | al | 23°C, 52% | RH | | Tes | ted by | | Gı | ıanwei Lia | io | |
| L | | | | | | | | | | | | | |
| Ord | der | Freq. [Hz] | Irms [A] | Irms% [%] | Irms%L [%] | | ax A] | Imax% [A] | Imax% [A] | L | Limit [A] | Status | Vrms [V] |
| | | | | | | | | | | | | | <u> </u> |
| 1 | | 50 | 0.4659 | 95.235 | - | 0.4 | | 95.259 | - | | - | 229.52 | 0.00 |
| 2 | | 100 | 0.0051 | 1.0479 | 0.4747 | 0.0 | | 1.0479 | 0.474 | | 1.0800 | 0.1227 | 0.00 |
| 3 | | 150 | 0.1479 | 30.240 | 6.4326 | 0.1 | | 30.240 | 4.0400 | | 2.3000 | 0.0245 | 0.00 |
| 4 | | 200 | 0.0009 | 0.1747 | 0.1987 | 0.0 | | 0.1747 | 0.198 | | 0.4300 | 0.0000 | 0.00 |
| 5 | | 250 | 0.0143 | 2.9192 | 1.2528 | 0.0 | | 2.9441 | 1.263 | | 1.1400 | 0.0000 | 0.00 |
| | | 300 | 0.0012 | 0.2495 | 0.4069 | 0.0 | | 0.2495 | 0.4068 | | 0.3000 | 0.0000 | 0.00 |
| 8 | | 350 | 0.0115 | 2.3453 0.0749 | 1.4902 | | | 2.3453 | 1.4902 | | 0.7700 | 0.0000 | 0.00 |
| c | | 400 450 | 0.0004 | 3.0938 | 0.1592 3.7842 | 0.0 | | 0.0998 3.0938 | 0.2123 | | 0.2300 | 0.0000 0.0000 | 0.00 |
| 1 | | 500 | 0.0002 | 0.0499 | 0.1327 | 0.0 | | 0.0749 | 0.199 | | 0.4000 | 0.0000 | 0.00 |
| 1 | | 550 | 0.0002 | 0.6487 | 0.9618 | 0.0 | | 0.6487 | 0.9619 | | 0.1340 | 0.0000 | 0.00 |
| 1 | | 600 | 0.0032 | 0.0487 | 0.1592 | 0.0 | | 0.0749 | 0.2389 | | 0.1533 | 0.0000 | 0.00 |
| 1 | | 650 | 0.0032 | 0.6487 | 1.5113 | 0.0 | | 0.6737 | 1.5698 | | 0.1333 | 0.0000 | 0.00 |
| 14 | | 700 | 0.0002 | 0.0407 | 0.1858 | 0.0 | | 0.0737 | 0.2780 | | 0.1314 | 0.0000 | 0.00 |
| 1 | | 750 | 0.0042 | 0.8483 | 2.7669 | 0.0 | | 0.8483 | 2.766 | | 0.1514 | 0.0000 | 0.00 |
| 1 | | 800 | 0.0004 | 0.0749 | 0.3184 | 0.0 | | 0.0998 | 0.4240 | | 0.1150 | 0.0000 | 0.00 |
| 1 | | 850 | 0.0042 | 0.8483 | 3.1359 | 0.0 | | 0.8483 | 3.136 | | 0.1324 | 0.0000 | 0.00 |
| 1 | | 900 | 0.0002 | 0.0499 | 0.2388 | 0.0 | | 0.0499 | 0.238 | | 0.1022 | 0.0000 | 0.00 |
| 1 | | 950 | 0.0060 | 1.2226 | 5.0510 | 0.0 | | 1.2226 | 5.051 | | 0.1184 | 0.0000 | 0.00 |
| 2 | | 1000 | 0.0006 | 0.1248 | 0.6634 | 0.0 | | 0.1248 | 0.663 | | 0.0920 | 0.0000 | 0.00 |
| 2 | | 1050 | 0.0037 | 0.7485 | 3.4180 | 0.0 | | 0.7735 | 3.5308 | | 0.1071 | 0.0000 | 0.00 |
| 2 | 2 | 1100 | 0.0010 | 0.1996 | 1.1676 | 0.0 | 010 | 0.1996 | 1.1679 |) | 0.0836 | 0.0000 | 0.00 |
| 2 | 3 | 1150 | 0.0076 | 1.5469 | 7.7365 | 0.0 | 076 | 1.5469 | 7.7403 | 3 | 0.0978 | 0.0000 | 0.00 |
| 24 | | 1200 | 0.0005 | 0.0998 | 0.6369 | 0.0 | | 0.0998 | 0.6369 | | 0.0767 | 0.0000 | 0.00 |
| 2 | | 1250 | 0.0049 | 0.9980 | 5.4253 | 0.0 | | 1.0230 | 5.563 | | 0.0900 | 0.0000 | 0.00 |
| 2 | | 1300 | 0.0009 | 0.1747 | 1.2074 | 0.0 | | 0.1996 | 1.3793 | | 0.0708 | 0.0000 | 0.00 |
| 2 | | 1350 | 0.0027 | 0.5489 | 3.2227 | 0.0 | | 0.5739 | 3.3675 | | 0.0833 | 0.0000 | 0.00 |
| 2 | | 1400 | 0.0011 | 0.2246 | 1.6718 | 0.0 | | 0.2246 | 1.6729 | | 0.0657 | 0.0000 | 0.00 |
| 2 | | 1450 | 0.0050 | 1.0230 | 6.4507 | 0.0 | | 1.0479 | 6.6038 | | 0.0776 | 0.0000 | 0.00 |
| 3 | | 1500 | 0.0005 | 0.0998 | 0.7961 | 0.0 | | 0.0998 | 0.7968 | | 0.0613 | 0.0000 | 0.00 |
| 3 | | 1550 | 0.0059 | 1.1976 | 8.0729 | 0.0 | | 1.1976 | 8.0672 | | 0.0726 | 0.0000 | 0.00 |
| 3 | | 1600 | 0.0007 | 0.1497 | 1.2738 | 0.0 | | 0.1497 | 1.273 | | 0.0575 | 0.0000 | 0.00 |
| 3 | | 1650 | 0.0013 | 0.2745 | 1.9694 | 0.0 | | 0.2745 | 1.9678 | | 0.0682 | 0.0000 | 0.00 |
| 3 | | 1700 1750 | 0.0007 | 0.1497 0.2994 | 1.3534 2.2786 | 0.0 | | 0.1747 0.2994 | 1.580 | | 0.0541 | 0.0000 0.0000 | 0.00 |
| 3 | | 1/50 | 0.0015 | 0.2994 | 0.4777 | 0.0 | | 0.2994 | 0.4773 | | 0.0643 | 0.0000 | 0.00 |
| 3 | | 1800 | 0.0002 | 0.6487 | 5.2192 | 0.0 | | 0.6737 | 5.421 | | 0.0511 | 0.0000 | 0.00 |
| 3 | | 1900 | 0.0032 | 0.0487 | 0.5042 | 0.0 | | 0.0499 | 0.5038 | | 0.0008 | 0.0000 | 0.00 |
| 3 | | 1900 | 0.0002 | 0.2495 | 2.1159 | 0.0 | | 0.2745 | 2.3250 | | 0.0484 | 0.0000 | 0.00 |
| 4 | | 2000 | 0.0012 | 0.0499 | 0.5307 | 0.0 | | 0.0749 | 0.7958 | | 0.0377 | 0.0000 | 0.00 |
| 4 | v | 2000 | 0.0002 | 0.0477 | 0.5507 | 0.0 | -00 4 | 0.0747 | 0.1930 | ر | 0.0400 | 0.0000 | 0.00 |

Note:

1. Limits are not specified for equipment with a rated power of 75W or less (other than lighting equipment).

2. According to EN 61000-3-2 the manufacturer shall specify the power of the apparatus. This value shall be used for establishing limits. The specified power shall be within +/-10% of the measured power.





F



4.5 Voltage Fluctuation and Flicker Measurement

4.5.1 Limit for Voltage Function and Flicker Measurement

| Tests Item | Limits IEC/EN 61000-3-3 | Remark |
|------------|----------------------------|---|
| P st | 1.0, Tp= 10 min. | Pst means short-term flicker |
| P lt | 0.65, Tp=2 hr. | Plt means long-term flicker |
| Dc(%) | 3.3% | dc means relative steady-state voltage change |
| Dmax(%) | 4% | dmax means maximum relative voltage change. |
| Td (t) | 3.3% / 500 ms | Tdt means maximum time that dt exceeds 3 %. |

4.5.2 Test Instrument

| Item | Equipment | Manufacturer | Model | Meter No. | Calibration Date |
|------|------------------------------------|--------------|-------------|-------------|---------------------|
| 1 | Harmonics & Flicker Analyser | EMC PARTNER | HAR-1000-1P | CT-1-090(1) | Aug. 30, 2019 |
| 2 | Power Source | EMC PARTNER | PS3-1 | CT-1-090a1 | Aug. 30, 2019 |

Note: 1. The calibration interval of the above test instruments is 12 months.


4.5.3 Test Procedure

The EUT was placed on the top of a wooden table 0.8 meter above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating condition.

During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 min and the observation period for long-term flicker indicator is 2 hours.

4.5.4 Deviation from Test Standard

No deviation

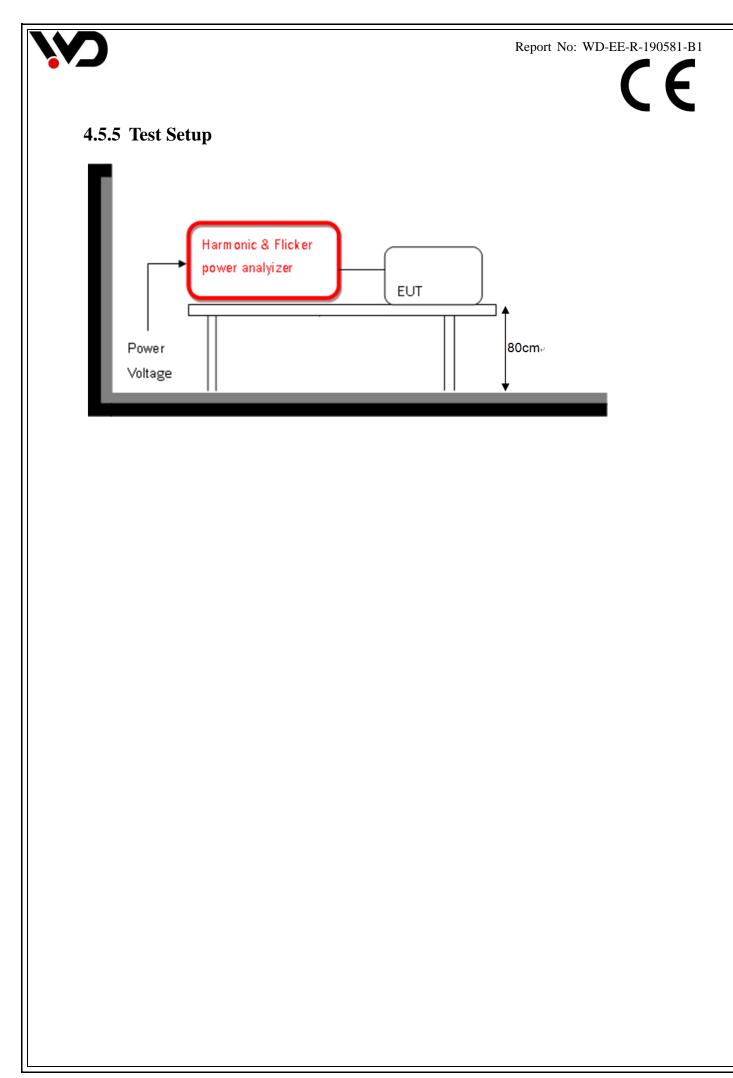



4.5.6 Test Result

| Supply Voltage / Ampere | 229.3 Vrms / 0.489 Arms | Test Date | 2019/09/05 |
|----------------------------|----------------------------|-----------------------------|--------------|
| Observation (Tp) | 30 min | Environmental Conditions | 23°C, 52% RH |
| Power Frequency | 49.922Hz | Tested by | Guanwei Liao |

| Test Parameter | Measurement Value | Test Limit | Remarks |
|----------------------|-------------------|------------|---------|
| P _{st} | 0.07 | 1.00 | Pass |
| P _{lt} | 007 | 0.65 | Pass |
| T _{dt} (ms) | 0.00 | 500 | Pass |
| d _{max} (%) | 0.00 | 4% | Pass |
| dc (%) | 0.00 | 3.3% | Pass |


Note: 1.

2. 3.

 P_{st} means short-term flicker indicator. P_{lt} means long-term flicker indicator. T_{dt} means maximum time that dt exceeds 3.3 %.

 $4. \quad d_{max} \ means \ maximum \ relative \ voltage \ change.$

5. dc means relative steady-state voltage change.

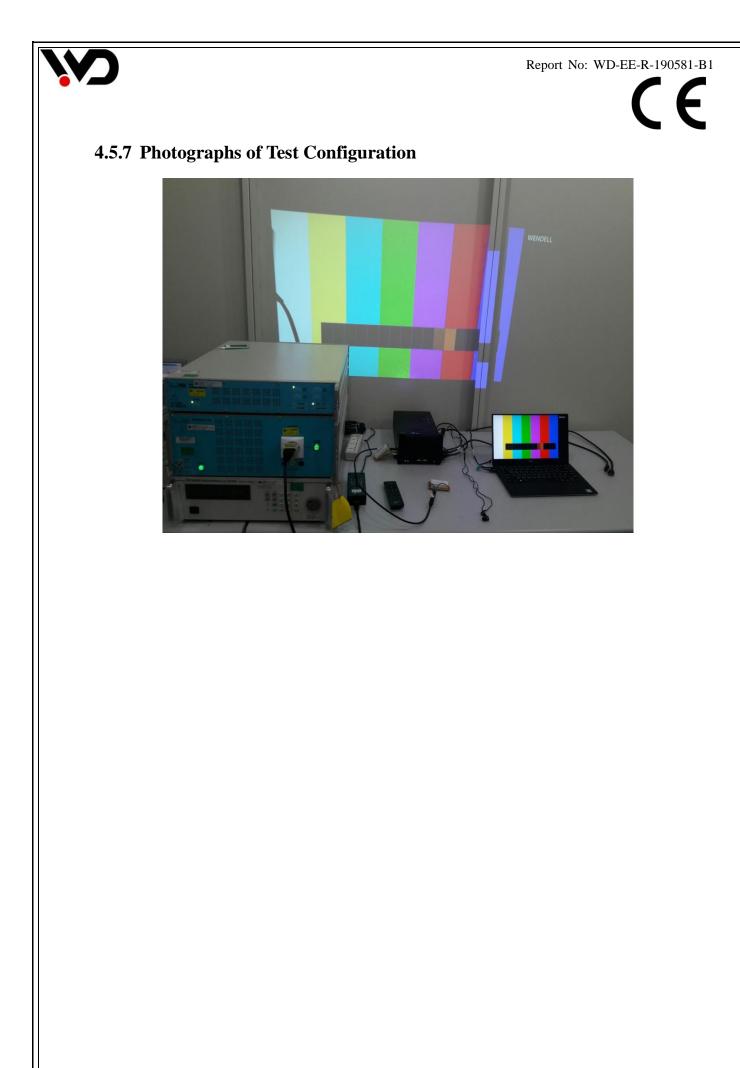



5 Immunity Test

5.1 Standard Description

| Product standard | | EN 301489-1 & EN 301489-17 |
|---|-------------------------|---|
| | EN 61000-4-2 (ESD) | ±8kV Air discharge ±4kV Contact discharge, Performance Criterion B |
| | EN 61000-4-3 (RS) | 80 M~ 6000 MHz, 3V/m(rms) , 80% AM (1kHz), Performance Criterion A |
| | EN 61000-4-4 (EFT) | AC Power Port: ±1kV DC Power Port: ±0.5Kv Signal Ports and Wired Network Ports (cable length > 3m): 0.5kV Performance Criterion B |
| Basic Standard and Performance Criterion required | EN 61000-4-5 (Surge) | AC power line: line to line $\pm 1 \text{ kV}$, line to ground $\pm 2 \text{ kV}$, Performance Criteria B Outdoor signal line: Symmetrically: line to ground $\pm 1 \text{ kV}$, Non-symmetrically: line to line $\pm 0.5 \text{ kV}$, line to ground $\pm 1 \text{ kV}$, Indoor signal line (cable length > 30m): Symmetrically: line to ground $\pm 0.5 \text{ kV}$, Non-symmetrically: line to ground $\pm 0.5 \text{ kV}$, Performance Criteria B |
| | EN 61000-4-6 (CS) | Signal and Telecommunication Ports(cable length > 3m), AC Power Port; DC Power Port: 0.15 ~ 80 MHz, 3Vrms, 80% AM, 1kHz, Performance Criterion A |
| | EN 61000-4-11 (Dips) | Voltage Dips: 0% residual for 0,5 cycle, Required Performance Criterion B 0% residual for 1 cycle, Required Performance Criterion B 70% residual for 25 cycles, Required Performance Criterion B Voltage Interruptions: 0% residual for 250 cycles, Required Performance Criterion C |



5.2 Performance Criteria

According to Clause 6 of EN 301489-1 standard, the required performance criteria as following:

| Criteria CT/CR | During and after the test, the equipment shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer when the equipment is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance. During the test the EUT shall not unintentionally transmit or change its actual operating state and stored data. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and what the user may reasonably expect from the equipment if used as intended. |
|-------------------|--|
| Criteria TT/TR | For surges applied to symmetrically operated wired network ports intended to be connected directly to outdoor lines the following criteria applies: 1. For products with only one symmetrical port intended for connection to outdoor lines, loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A SW reboot is not allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost. 2. For products with more than one symmetrical port intended for connection to outdoor lines, loss of function on the port under test is allowed, provided the function is self-recoverable. A SW reboot is not allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost. 2. For products with more than one symmetrical port intended for connection to outdoor lines, loss of function on the port under test is allowed, provided the function is self-recoverable. A SW reboot is not allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost. For all other ports the following applies: 1. After the test, the equipment shall continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level specified by the manufacturer, when the equipment is used as intended. In some cases this permissible performance level may be replaced by a permissible loss of performance. 2. During the EMC exposure to an electromagnetic phenomenon, a degradation of performance is, however, allowed. No change of the actual mode of operation (e.g. unintended transmission) or stored data is allowed. 3. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deduced from the product description and documentation and wh |



According to Clause 6 of EN 301489-17 standard, the required performance criteria as following:

| Criteria CT | The performance criteria A shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an ACKnowledgement (ACK) or Not ACKnowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted. |
|----------------|---|
| Criteria CR | The performance criteria A shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted. |
| Criteria TT | The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5000 ms duration, for which performance criteria C shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an acknowledgement (ACK) or not-acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted. |
| Criteria TR | The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5000 ms duration for which performance criteria C shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted. |

Report No: WD-EE-R-190581-B1




| Criteria | During test | After test |
|----------|---|--|
| А | Shall operate as intended. ^{NOTE 1} Shall be no loss of function. Shall be no unintentional transmissions. | Shall operate as intended. Shall be no degradation of performance. ^{NOTE3} Shall be no loss of function. Shall be no loss of stored data or user programmable functions. |
| В | May show loss of function. May show degradation of performance. ^{NOTE2} Shall be no unintentional transmissions. | Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no degradation of performance.^{NOTE3} Shall be no loss of stored data or user programmable functions. |
| С | May be loss of function. | Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no degradation of performance . ^{NOTE3} |

NOTE 1: Operate as intended during the test allows a level of degradation not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

NOTE 2: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.

NOTE 3: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.





5.3 Electrostatic Discharge (ESD)

5.3.1 Test Specification


| Standard | EN 61000-4-2 |
|---------------------|--|
| Discharge Impedance | 330 ohm / 150 pF |
| Dischange Veltage | Air Discharge: ±2, ±4, ±8 kV |
| Discharge Voltage | Contact Discharge: ±4 kV |
| Number of Discharge | Air: Minimum 10 times at each point. |
| Number of Discharge | Contact: Minimum 10 times at each point. |
| Discharge Mode | Single Discharge |
| Discharge Period | 1 second minimum |

5.3.2 Test Instrument

| Item | Equipment | Manufacturer | Model | Meter No. | Calibration Date |
|------|----------------------------------|--------------|-----------|-----------|---------------------|
| 1 | ESD Simulator/ Discharge Gun | NoiseKen | ESS-B3011 | CT-1-089 | Aug. 19, 2019 |
| 2 | Digital Thermo-Hygro Meter | N/A | HTC-8 | CT-2-047 | Apr. 23, 2019 |
| 3 | Atmosphere pressure meter | Mingle | BKT381 | CT-2-091 | Jul. 25, 2019 |

Note: 1. The calibration interval of the test instruments is 12 months.

2. The calibration interval of thermo hygrometer/ Atmosphere pressure meter is 24 months.



5.3.3 Test Procedure

The test generator necessary to perform direct and indirect application of discharge to the EUT in following methods:

a. Contact discharges to the conductive surface and coupling planes:

The EUT shall be exposed to at least 20 discharges, 10 each at positive and negative polarity, at a minimum of four test points. One of the test points shall be subjected to at least 10 indirect discharges to the center of the front edge of the horizontal coupling plane (HCP). The remaining three test points shall be each receives at least 10 direct contact discharges. If no direct contact test points are available, shall be at least 20 indirect discharges applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions $0.5 \text{ m} \times 0.5 \text{ m}$, is placed parallel to, and positioned at a distance 0.1 m from, the EUT, with the discharge electrode touching the coupling plane. The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane, of dimensions $1.6 \text{ m} \times 0.8 \text{ m}$, is placed under the EUT. The generator shall be positioned vertically a distance of 0.1 m from the EUT, with the discharge electrode touching the coupling plane. The four faces of the EUT will be performed with electrostatic discharge.

b. Air discharge at apertures and slots and insulating surface:


On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum 10 single air discharges shall be applied to the selected test point for each such area.



5.3.4 Deviation from Test Standard

No deviation

5.3.5 Test Setup

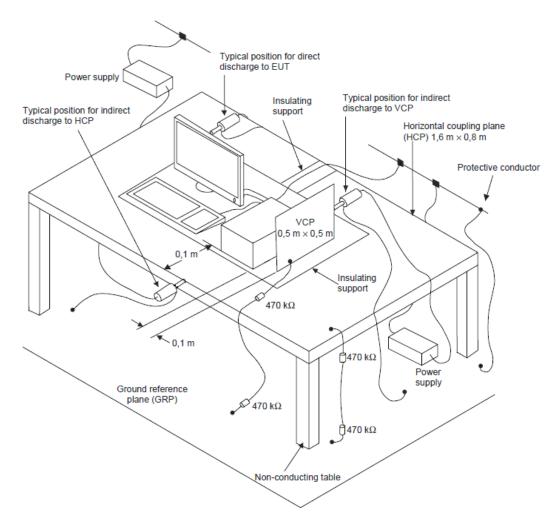





5.3.6 Test Result

| Test Voltage | 230Vac, 50Hz | Test Date | 2019/09/24 |
|-----------------------------|--------------|-----------|------------|
| Environmental Conditions | 25°C, 51% RH | Pressure | 1010 mbar |
| Tested by | Evan Cheng | | |

Test Results of Direct Application

| Air Discharge | | | | | |
|---------------|---------|---------------------|-------|--------|--|
| Test Point |] | Discharge Level (kV |) | Result | |
| lest romt | ± 2 | ±4 ±8 | | Kesuit | |
| Front | А | А | А | А | |
| Back | А | А | А | А | |
| Left | А | B(#1) | B(#1) | В | |
| Right | А | B (#1) | B(#1) | В | |
| Тор | А | А | А | А | |
| Bottom | А | А | А | А | |
| Other | А | А | А | А | |

* Test location(s) in which discharge to be applied illustrated by photos shown in next page(s).

| Contact Discharge | | | |
|-------------------|----------------------|--------|--|
| Terret De trad | Discharge Level (kV) | Result | |
| Test Point | ±4 | Kesuit | |
| Front | N/A | N/A | |
| Back | N/A | N/A | |
| Left | N/A | N/A | |
| Right | N/A | N/A | |
| Тор | B(#1) | В | |
| Bottom | B(#1) | В | |
| Other | N/A | N/A | |

* Test location(s) in which discharge to be applied illustrated by photos shown in next page(s).





Test Results of Indirect Application

| HCP Discharge | | | |
|---------------|----------------------|----------|--|
| Test Point | Discharge Level (kV) | Descrift | |
| Test Point | ±4 | Result | |
| Front | А | А | |
| Back | А | А | |
| Left | А | А | |
| Right | А | А | |

| VCP Discharge | | | |
|---------------|----------------------|--------|--|
| Test Point | Discharge Level (kV) | Result | |
| lest romt | ±4 | Kesun | |
| Front | А | А | |
| Back | А | А | |
| Left | А | А | |
| Right | А | А | |

Note:


N/A: Not applicable

Criteria A: The EUT function was correct during the test.

Criteria B: (#1) The EUT was interrupted during test. It could become normal after test stop.





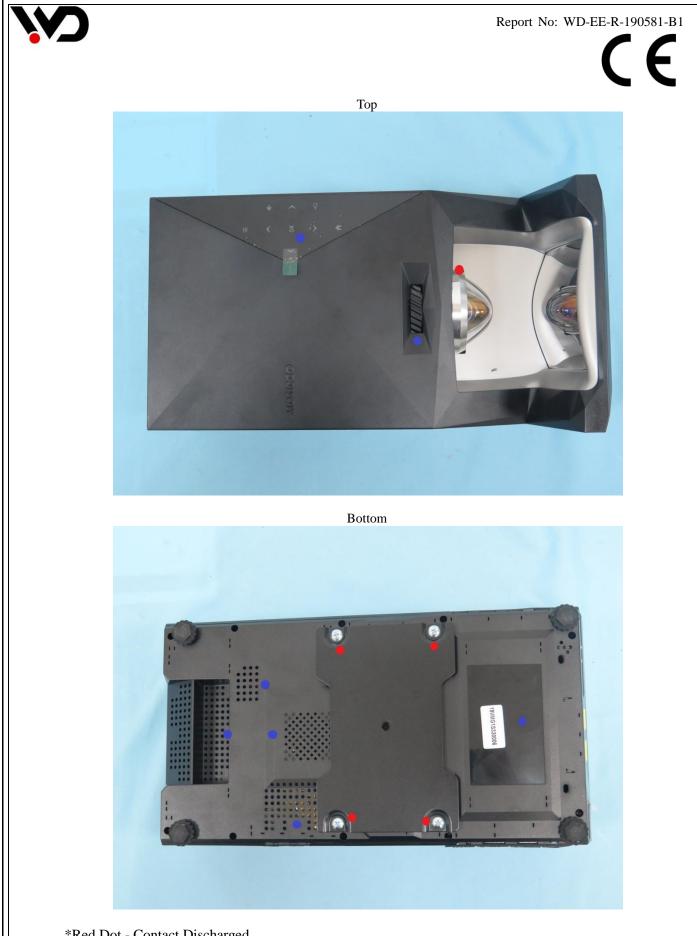

*Red Dot - Contact Discharged Blue Dot - Air Discharged



*Red Dot - Contact Discharged Blue Dot - Air Discharged



Report No: WD-EE-R-190581-B1

CE

5.3.7 Photographs of Test Configuration





5.4 Radiated, Radio-frequency, Electromagnetic Field Immunity Test (RS)


5.4.1 Test Specification

| Standard | EN 61000-4-3 |
|---------------------|-------------------------------------|
| Frequency Range | 80 MHz - 6000 MHz |
| Field Strength | 3 V/m |
| Modulation | 80%, AM Modulation, 1 kHz Sine Wave |
| Frequency Step 1% | |
| Polarity of Antenna | Horizontal and Vertical |
| Test Distance | 3 m |
| Antenna Height | 1.5 m |
| Dwell Time | 3.0 seconds |

5.4.2 Test Instrument

| Item | Equipment | Manufacturer | Model | Meter No. | Calibration Date |
|------|--|----------------------------------|-------------|------------|------------------------|
| 1 | RadiCentre ® Modular EMC Test Systems | DARE | CTR1004B | CT-1-080 | No calibration request |
| 2 | RF Signal Generator | DARE | RGN6000B | CT-1-080 | Aug. 01, 2019 |
| 3 | LINEAR POWER RF AMPLIFIER | OPHIR | 5225 | CT-1-082 | No calibration request |
| 4 | LINEAR POWER RF AMPLIFIER | OPHIR | 5193 | CT-1-083 | No calibration request |
| 5 | LINEAR POWER RF AMPLIFIER | OPHIR | 5022A | CT-1-084 | No calibration request |
| 6 | Periodic Test-Antenna | Schwarzbeck Mess - Elektronik | STLP 9128 E | CT-1-085 | No calibration request |
| 7 | Stacked Microwave LogPer. Antenna | Schwarzbeck Mess - Elektronik | STLP 9149 | CT-1-086 | No calibration request |
| 8 | Electric Field Probe | FRANKONIA | EFS-10 | CT-1-060a1 | Aug. 01, 2019 |
| 9 | Measurement Software | EMC-RS | Ver: 2.02 | N/A | No calibration request |

Note: 1. The calibration interval of the above test instruments is 12 months.





5.4.3 Test Procedure

The test procedure was in accordance with IEC 61000-4-3.

The EUT and load, which are placed on a table that is 0.8 meter above ground, are placed with one coincident with the calibration plane such that the distance from antenna to the EUT was 3 meters.


Both horizontal and vertical polarization of the antenna and four sides of the EUT are set on measurement.

In order to judge the EUT performance, a CCD camera is used to monitor EUT screen. All the scanning conditions are as follows:

| | Condition of Test | Remarks | |
|---|--------------------------------|----------------------------|--|
| 1 | Field Strength | 3V/m | |
| 2 | Radiated Signal | AM 80% Modulated with 1kHz | |
| 3 | Scanning Frequency | 80M- 6000MHz | |
| 4 | Dwell Time | 3.0 Seconds | |
| 5 | Frequency Step Size Δf | 1% | |

5.4.4 Deviation from Test Standard

No deviation

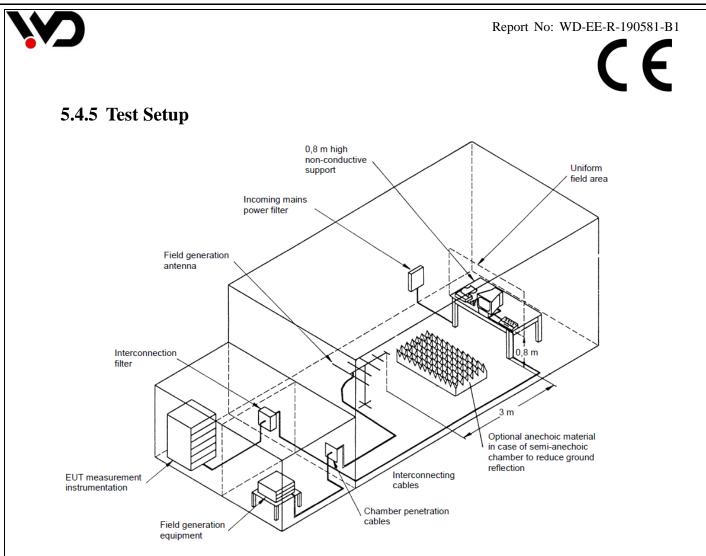

NOTE:

TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height.





5.4.6 Test Result

| Test Voltage | 230Vac, 50Hz | Environmental Conditions | 24°C, 51% RH |
|--------------|--------------|-----------------------------|--------------|
| Tested by | Evan Cheng | Test Date | 2019/10/01 |

| Frequency Range (MHz) | Azimuth | Polarity | Field Strength (V/m) | Modulation | Result |
|--------------------------|---------|----------|----------------------------|------------------|--------|
| 80-6000 | 0 | H/V | 3 | 80% AM (1kHz) | А |
| 80-6000 | 90 | H/V | 3 | 80% AM (1kHz) | А |
| 80-6000 | 180 | H/V | 3 | 80% AM (1kHz) | А |
| 80-6000 | 270 | H/V | 3 | 80% AM (1kHz) | А |


Note:


Criteria A: The EUT function was correct during the test.






5.4.7 Photographs of Test Configuration

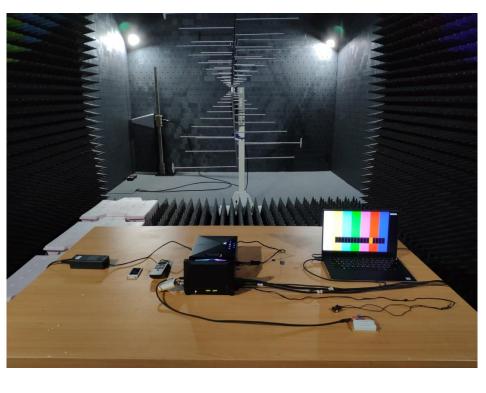

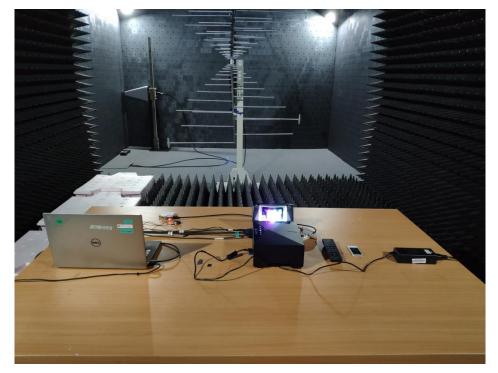





5.5 Electrical Fast Transient /Burst Immunity Test (EFT)

5.5.1 Test Specification

| Standard | EN 61000-4-4 |
|-------------------|--|
| Test Voltage | AC supply lines: ±1 kV DC Power Port: ±0.5 kV Signal ports and telecommunication ports: ±0.5kV |
| Polarity | Positive & Negative |
| Impulse Frequency | xDSL telecommunication port: 100 kHz other: 5kHz |
| Impulse Wave | 5/50 ns |
| Burst Duration | xDSL port: 0.75 ms other port: 15 ms |
| Burst Period | 300 ms |
| Test Duration | Not less than 1 min. |

5.5.2 Test Instrument

| Item | Equipment | Manufacturer | Model | Meter No. | Calibration Date |
|------|-------------------------|--------------|----------|-----------|------------------------|
| 1 | EMS Generator | Thermo | EMC Pro | CT-1-030 | Apr. 28, 2019 |
| 2 | Clamp | KeyTek | CCL | CT-1-032 | Apr. 28, 2019 |
| 3 | Measurement Software | CEWare32 | Ver: 4.1 | N/A | No calibration request |

Note: 1. The calibration interval of the above test instruments is 12 months.



[F

5.5.3 Test Procedure

The EUT is placed on a table that is 0.8 meter height. A ground reference plane is placed on the table, and uses a 0.1m insulation between the EUT and ground reference plane.

The minimum area of the ground reference plane is 1m*1m, and 0.65mm thick min, and projected beyond the EUT by at least 0.1m on all sides.

For input AC power ports:


The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal.

Each of the line conductors is impressed with burst noise for 1 minute.

The length of the power lines between the coupling device and the EUT is 0.5m.

5.5.4 Deviation from Test Standard

No deviation

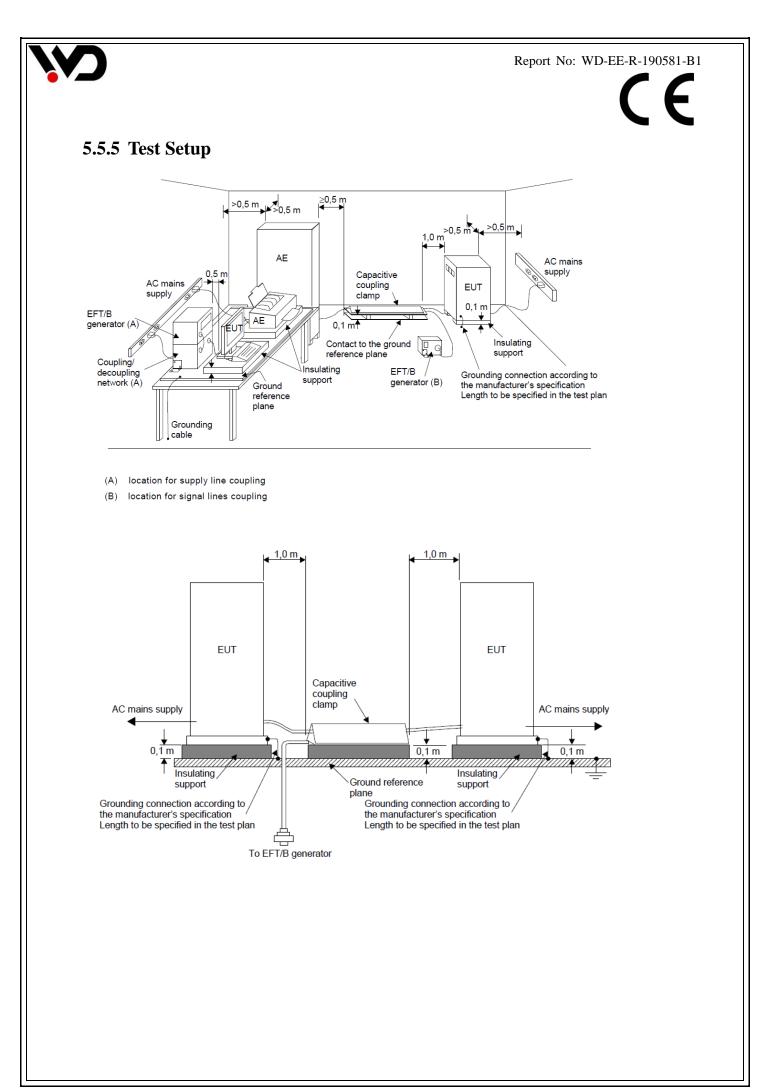





5.5.6 Test Result

| Test Voltage | 230Vac, 50Hz | Environmental Conditions | 25°C, 47% RH |
|--------------|--------------|-----------------------------|--------------|
| Tested by | Evan Cheng | Test Date | 2019/09/12 |

| Test Point | | Test Level (kV) | Polarity (+/-) | Result |
|---------------|--------|--------------------|-------------------|--------|
| | L | 1 | +/- | А |
| | Ν | 1 | +/- | А |
| | PE | 1 | +/- | А |
| AC Power Port | L+N | 1 | +/- | А |
| | L+PE | 1 | +/- | А |
| - | N+PE | 1 | +/- | А |
| | L+N+PE | 1 | +/- | А |

Note:

Criteria A: The EUT function was correct during the test.





5.6 Surge Immunity Test

5.6.1 Test Specification

| Standard | EN 61000-4-5 |
|-----------------------|--|
| | AC Power Ports: |
| | 1.2/50 µs Open Circuit Voltage, 8/20 µs Short Circuit Current |
| | Outdoor symmetrically signal line: |
| Wave- Shape | 10/700 µs Open Circuit Voltage, 5/320 µs Short Circuit Current |
| | Outdoor non-symmetrically signal line: |
| | Indoor symmetrically / non-symmetrically signal line (length > 30m): |
| | 1.2/50 µs Open Circuit Voltage, 8/20 µs Short Circuit Current |
| | AC Power Ports: |
| | Line to line: ± 1 kV, Line to ground: ± 2 kV |
| | Outdoor symmetrically signal line: |
| Test Voltage | Line to ground: ±1kV |
| Test voltage | Outdoor non-symmetrically signal line: |
| | Line to ground: ± 1 kV, Line to line: ± 0.5 kV |
| | Indoor symmetrically / non-symmetrically signal line: |
| | Line to ground: ±0.5kV |
| Surge Input / Output | L1-L2, L1-PE, L2-PE |
| Polarity | Positive/Negative |
| Phase Angle | 0°/90°/180°/270° |
| Pulse Repetition Rate | 1 time / min. (maximum) |
| Times | 5 positive and 5 negative at selected points |

5.6.2 Test Instrument

| Item | Equipment | Manufacturer | Model | Meter No. | Calibration Date |
|------|---------------|--------------|-------------|-------------|---------------------|
| 1 | EMS Generator | HAEFELY | AXOS8 | CT-1-059(1) | Aug. 01, 2019 |
| 2 | Surge CDN | 3cTest | CDN-405T8A1 | CT-1-074(5) | Apr. 22, 2019 |

Note: 1. The calibration interval of the above test instruments is 12 months.



F

5.6.3 Test Procedure

The EUT is placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m minimum and 0.65mm thick minimum and projected beyond the EUT by at least 0.1m on all sides. The length of power cord between the coupling device and the EUT shall be 2m or less.

For input AC power ports:

The EUT is connected to the power mains through a coupling device that directly couples the surge interference signal.


The surge noise shall be applied synchronized to the voltage phase at 0° , 90° , 180° , 270° and the peak value of the AC voltage wave. (Positive and negative)

Each of Line to Earth and Line to Line is impressed with a sequence of five surge voltages with interval of 1 minute.

5.6.4 Deviation from Test Standard

No deviation

5.6.5 Test Setup

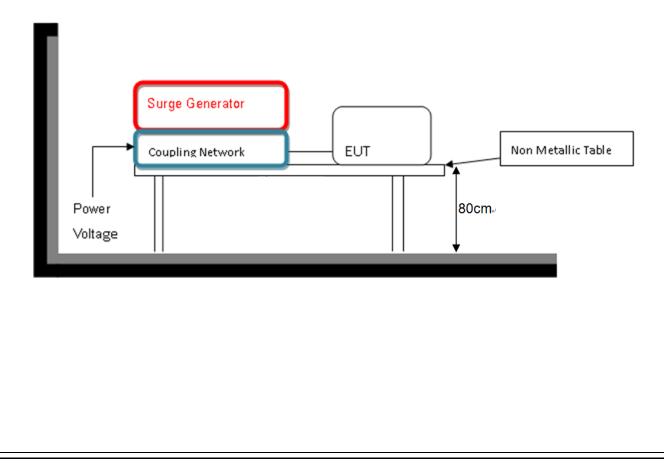





5.6.6 Test Result

| Test Voltage | 230Vac, 50Hz | Environmental Conditions | 24°C, 52% RH |
|--------------|--------------|-----------------------------|--------------|
| Tested by | Evan Cheng | Test Date | 2019/10/01 |

| AC Power Port | | | | | | |
|---------------|----------|---------|-----|---------------|--------|--------|
| Test Point | Polarity | | Te | st Voltage (l | Result | |
| Test Point | Phase | e (+/-) | 0.5 | 1 | 2 | Result |
| | 0° | +/- | А | А | - | |
| L to N | 90° | +/- | А | А | - | А |
| LION | 180° | +/- | А | А | - | A |
| | 270° | +/- | А | А | - | |
| | 0° | +/- | А | А | А | |
| L to PE | 90° | +/- | А | А | А | ٨ |
| LUFE | 180° | +/- | А | А | А | A |
| | 270° | +/- | А | А | А | |
| N to PE | 0° | +/- | А | А | А | |
| | 90° | +/- | А | А | А | |
| | 180° | +/- | А | А | А | A |
| | 270° | +/- | А | А | А | |

Note:

Criteria A: The EUT function was correct during the test.





5.7 Continuous Conducted Disturbances (CS)

5.7.1 Test Specification

| Standard | EN 61000-4-6 |
|-----------------|-------------------------------------|
| Frequency Range | 0.15 MHz - 80 MHz |
| Voltage Level | 3 V(rms) |
| Modulation | AM Modulation, 80%, 1 kHz Sine Wave |
| Frequency Step | 1% of fundamental |
| Dwell Time | 3 seconds |

5.7.2 Test Instrument

| Item | Equipment | Manufacturer | Model | Meter No. | Calibration Date |
|------|--|--------------|-------------|-------------|------------------------|
| 1 | Coupling clamp according to IEC 6100-4-6 | FRANKONIA | EMCL-20 | CT-1-049 | Apr. 25, 2019 |
| 2 | CDN for power supply lines | FRANKONIA | CDN M2+M3 | CT-1-054 | Apr. 26, 2019 |
| 3 | 6 dB Attenuator | BIRD | 75-A-FFN-06 | CT-1-056 | Apr. 25, 2019 |
| 4 | Compact Immunity Test System acc | FRANKONIA | CIT-10/75 | CT-1-057 | Apr. 24, 2019 |
| 5 | CDN for screened lines | FRANKONIA | RJ45S | CT-1-052(1) | May 20, 2019 |
| 6 | 50ohm Termination | N/A | N/A | CT-1-065-2 | Apr. 25, 2019 |
| 7 | Measurement Software | HUBERT | Ver: 1.1.2 | N/A | No calibration request |

Note: 1. The calibration interval of the above test instruments is 12 months.

5.7.3 Test Procedure

The EUT is placed on 0.1m insulation table between the EUT and ground reference plane.

For input AC power ports:

The EUT is connected to the power mains through a coupling and decoupling networks for power supply lines. And directly couples the disturbances signal into EUT.


Auxiliary equipment (AE) required for the defined operation of the EUT according to the specifications of the product committee.



5.7.4 Deviation from Test Standard


No deviation

5.7.5 Test Setup

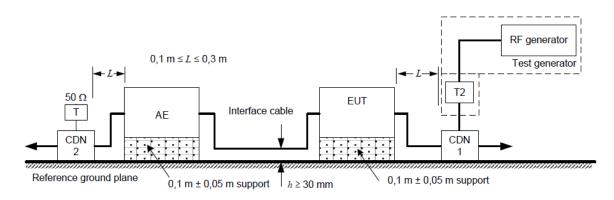

The interface cable is set at 1 m if possible.

a) Schematic setup for a 2-port EUT connected to only 1 CDN

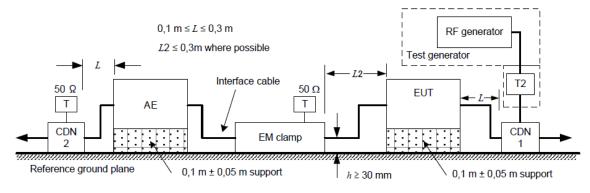

Note:

T: Termination 50 Ω

T2: Power attenuator (6 dB)

CDN: Coupling and decoupling network

Injection clamp: current clamp or EM clamp





5.7.6 Test Result

| Test Voltage | 230Vac, 50Hz | Environmental Conditions | 25°C, 46% RH |
|--------------|--------------|-----------------------------|--------------|
| Tested by | Evan Cheng | Test Date | 2019/09/29 |

| Frequency Range (MHz) | Tested Port | Injection Method | Test Level (V _{r.m.s.}) | Modulation | Result |
|--------------------------|--------------------|---------------------|--------------------------------------|-----------------|--------|
| 0.15 - 80 | AC Power | CDN-M2+ M3 (M3) | 3 | 80% AM, 1kHz | А |

Note:


Criteria A: The EUT function was correct during the test.



Report No: WD-EE-R-190581-B1



5.7.7 Photographs of Test Configuration

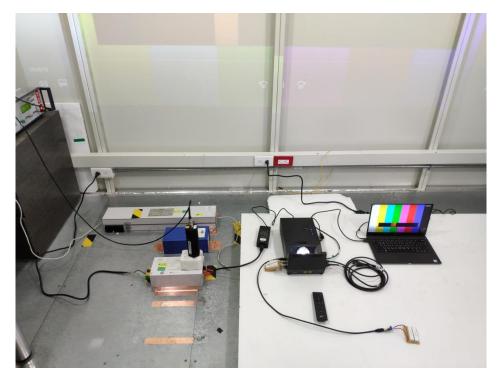





5.8 Voltage Dips & Short Interruptions

5.8.1 Test Specification

| Basic Standard | EN 61000-4-11 | | |
|------------------------|---|--|--|
| Test Level | Voltage Dips: 0% residual for 0.5 cycle 0% residual for 1 cycle 70% residual for 25 cycles Voltage Interruptions: 0% residual for 250 cycles | | |
| Test Duration Time | Minimum 3 test events in sequence | | |
| Interval between Event | Minimum 10 seconds | | |
| Phase Angle | 0°/45°/90°/135°/180°/225°/270°/315° | | |
| Test Cycle | 3 times | | |

5.8.2 Test Instrument

| Item | Equipment | Manufacturer | Model | Meter No. | Calibration Date |
|------|-------------------------|--------------|----------|-----------|------------------------|
| 1 | EMS Generator | Thermo | EMC Pro | CT-1-030 | Apr. 28, 2019 |
| 2 | Measurement Software | CEWare32 | Ver: 4.1 | N/A | No calibration request |

Note: 1. The calibration interval of the above test instruments is 12 months.

Report No: WD-EE-R-190581-B1



5.8.3 Test Procedure

Before starting the test of a given EUT, a test plan shall be prepared.

The test plan should be representative of the way the system is actually used.

Systems may require a precise pre-analysis to define which system configurations must be tested to reproduce field situations.

Test cases must be explained and indicated in the Test report.

It is recommended that the test plan include the following items:

- the type designation of the EUT;
- information on possible connections (plugs, terminals, etc.) and corresponding cables, and peripherals;
- input power port of equipment to be tested;
- representative operational modes of the EUT for the test;
- performance criteria used and defined in the technical specifications;
- operational mode(s) of equipment;
- description of the test set-up.


If the actual operating signal sources are not available to the EUT, they may be simulated.

For each test, any degradation of performance shall be recorded. The monitoring equipment should be capable of displaying the status of the operational mode of the EUT during and after the tests. After each group of tests, a full functional check shall be performed.

5.8.4 Deviation from Test Standard

No deviation

5.8.5 Test Setup

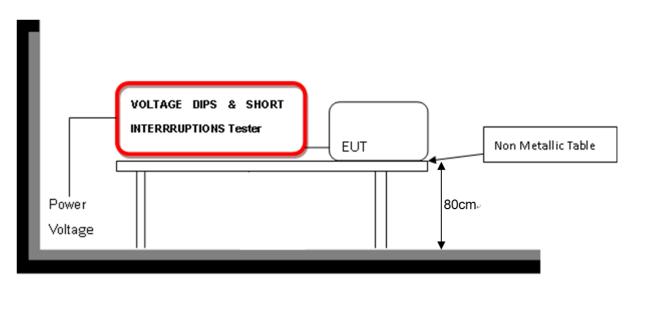





5.8.6 Test Result

| Test Voltage | 100-240Vac, 50Hz | Environmental Conditions | 25°C, 50% RH |
|--------------|------------------|-----------------------------|--------------|
| Tested by | Evan Cheng | Test Date | 2019/09/12 |

| 230Vac, 50Hz | | | |
|-----------------------|------------|----------------------|--------|
| Test Item | % Residual | Duration (Period) | Result |
| Voltage Dips | 0 | 0.5 | А |
| | 0 | 1 | А |
| | 70 | 25 | А |
| Voltage Interruptions | 0 | 250 | А |

| 240Vac, 50Hz | | | |
|-----------------------|------------|----------------------|--------|
| Test Item | % Residual | Duration (Period) | Result |
| Voltage Dips | 0 | 0.5 | А |
| | 0 | 1 | А |
| | 70 | 25 | А |
| Voltage Interruptions | 0 | 250 | А |

| 100Vac, 50Hz | | | |
|-----------------------|------------|----------------------|--------|
| Test Item | % Residual | Duration (Period) | Result |
| Voltage Dips | 0 | 0.5 | А |
| | 0 | 1 | А |
| | 70 | 25 | А |
| Voltage Interruptions | 0 | 250 | А |

Note:

Criteria A: The EUT function was correct during the test.

